

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2011 年 12 月 1 日(01.12.2011)

PCT


(10) 国際公開番号
WO 2011/148459 A1

- (51) 国際特許分類:
B66C 15/00 (2006.01) B66C 13/06 (2006.01)
B66C 11/04 (2006.01)
- (21) 国際出願番号: PCT/JP2010/058808
- (22) 国際出願日: 2010 年 5 月 25 日(25.05.2010)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (71) 出願人 (米国を除く全ての指定国について): ムラテックオートメーション株式会社 (MURATEC AUTOMATION CO., LTD.) [JP/JP]; 〒6018326 京都府京都市南区吉祥院南落合町 3 番地 Kyoto (JP).
- (72) 発明者: および
- (75) 発明者/出願人 (米国についてのみ): 泉 孝憲 (IZUMI Takanori) [JP/JP]; 〒4848502 愛知県犬山市大字橋爪字中島 2 番地 ムラテックオートメーション株式会社内 Aichi (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (74) 代理人: 塩入 明, 外 (SHIOIRI Akira et al.); 〒6590093 兵庫県芦屋市船戸町 4 番 1 - 4 0 9 号 室 Hyogo (JP).
- 添付公開書類:
— 国際調査報告 (条約第 21 条(3))

(54) Title: CEILING TRAVELING VEHICLE AND METHOD FOR PREVENTING PROTRUSION FROM CEILING TRAVELING VEHICLE

(54) 発明の名称: 天井走行車と、天井走行車からの飛び出し防止方法

[図3]

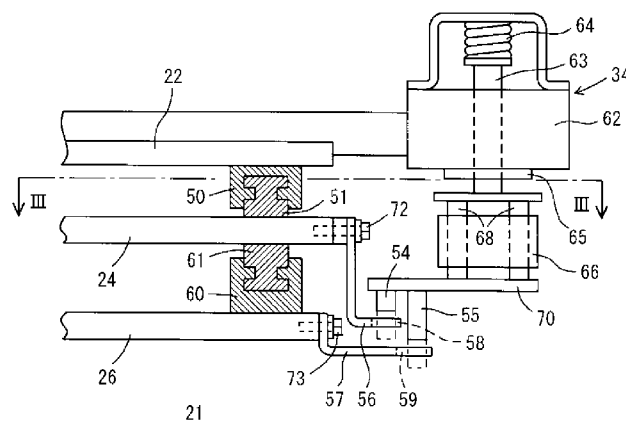

(57) Abstract: A movement section or a lifting device, etc. are prevented from protruding from a side of a ceiling traveling vehicle and are thus prevented from interfering with a stationary device or a ceiling traveling device which is located therearound. Protrusion from a ceiling traveling vehicle is prevented, the ceiling traveling vehicle comprising a traveling section, a lifting device which lifts and lowers an article, and a side movement mechanism which is provided with a base supported by the traveling section and also with a movement section moving to a side while supporting the lifting device. The movement section is moved between a state in which the movement section protrudes to a side of the traveling section and a state in which the movement section is retracted to the lower part of the traveling section. The movement section or the lifting device, and a base or the traveling section are engaged with each other with the movement section retracted to the lower part of the traveling section.

(57) 要約:

[続葉有]

WO 2011/148459 A1