

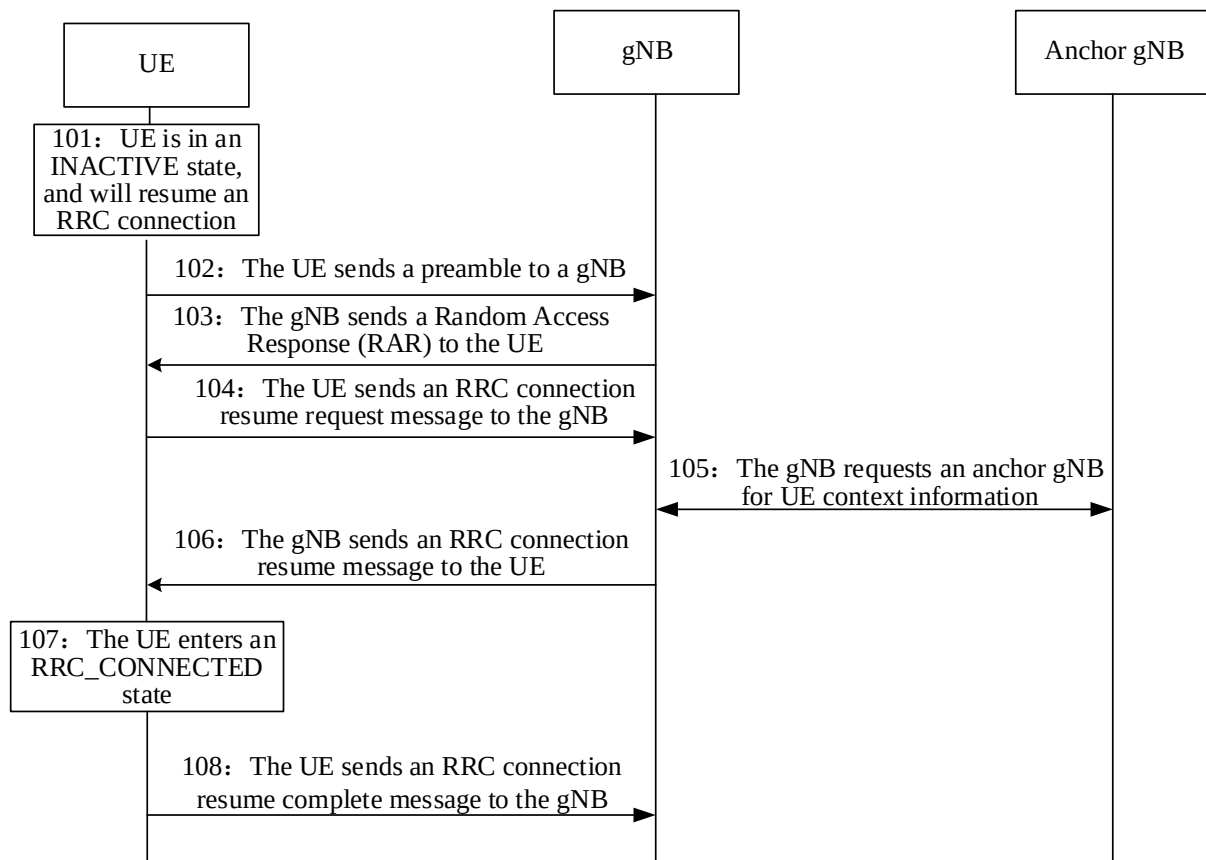


FIG. 1

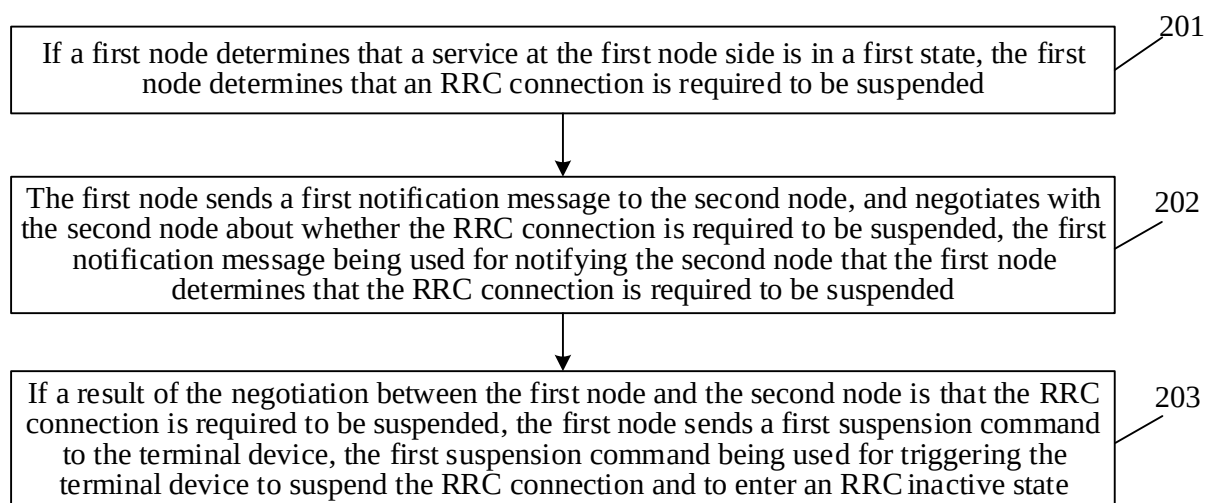


FIG. 2

if the second node determines that the service at the second node side is in the first state, and a result of the second node negotiating with the first node is that a part of the RRC connection is required to be suspended or the second node determines that a part of the RRC connection is required to be suspended, the second node sends a second suspension command to the terminal device, the second suspension command being used for triggering the terminal device to suspend the part of the RRC connection and to enter a partial RRC inactive state, the suspension of the part of the RRC connection referring to the suspension of the resources of the SCG part

301

FIG. 3

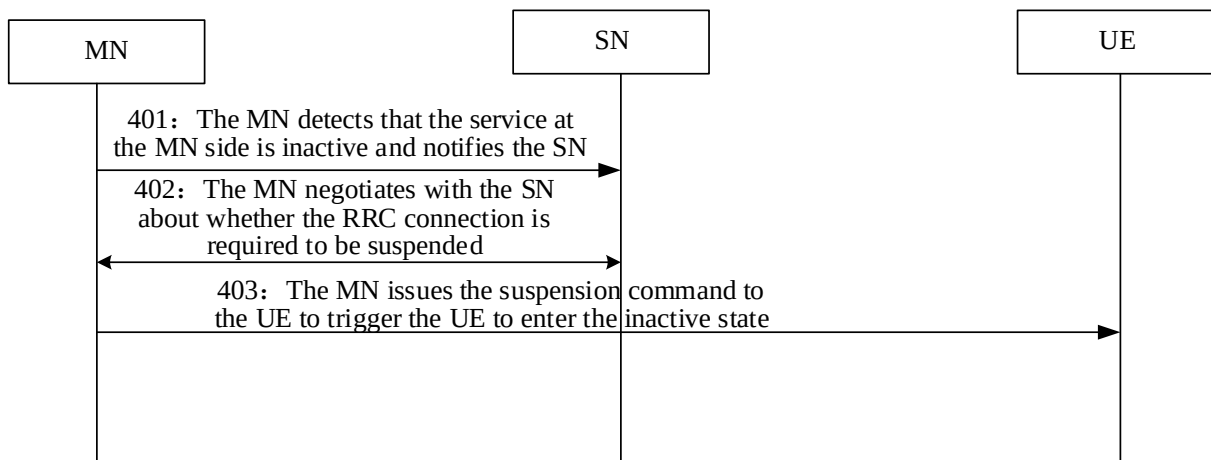


FIG. 4

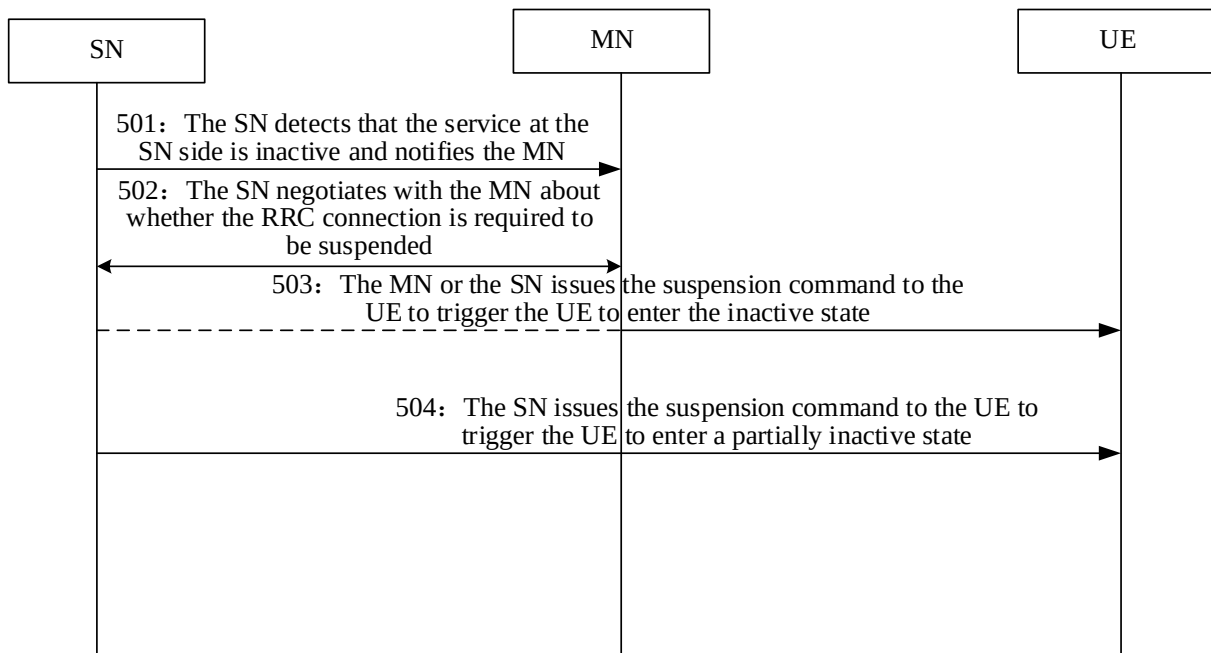


FIG. 5

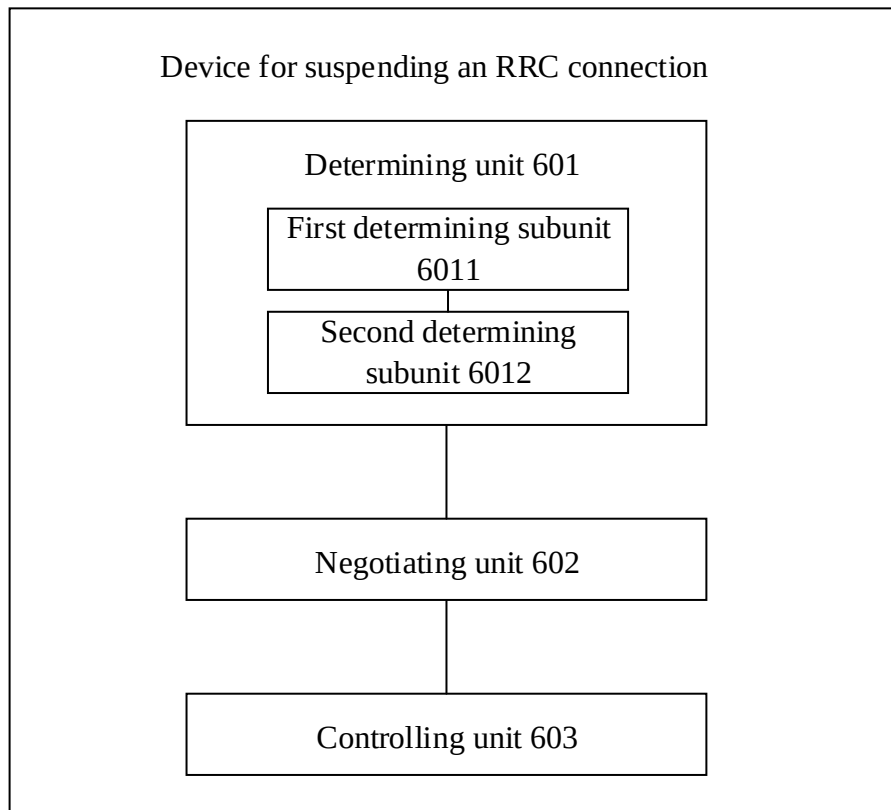


FIG. 6

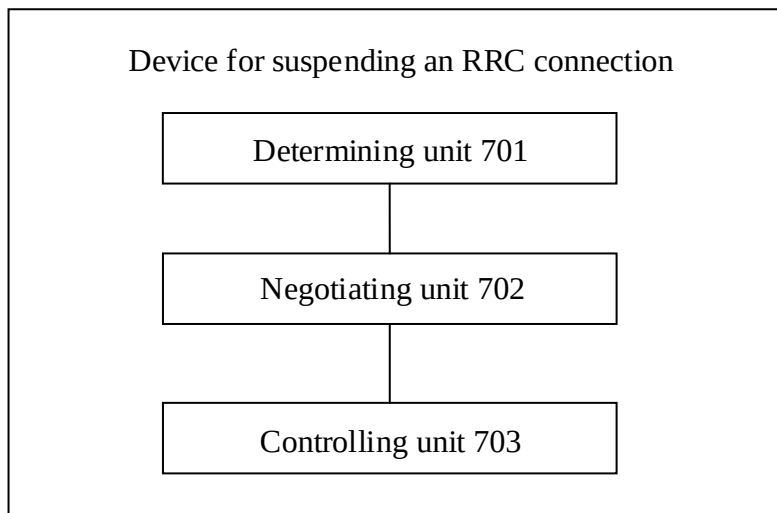


FIG. 7

Computer device 100

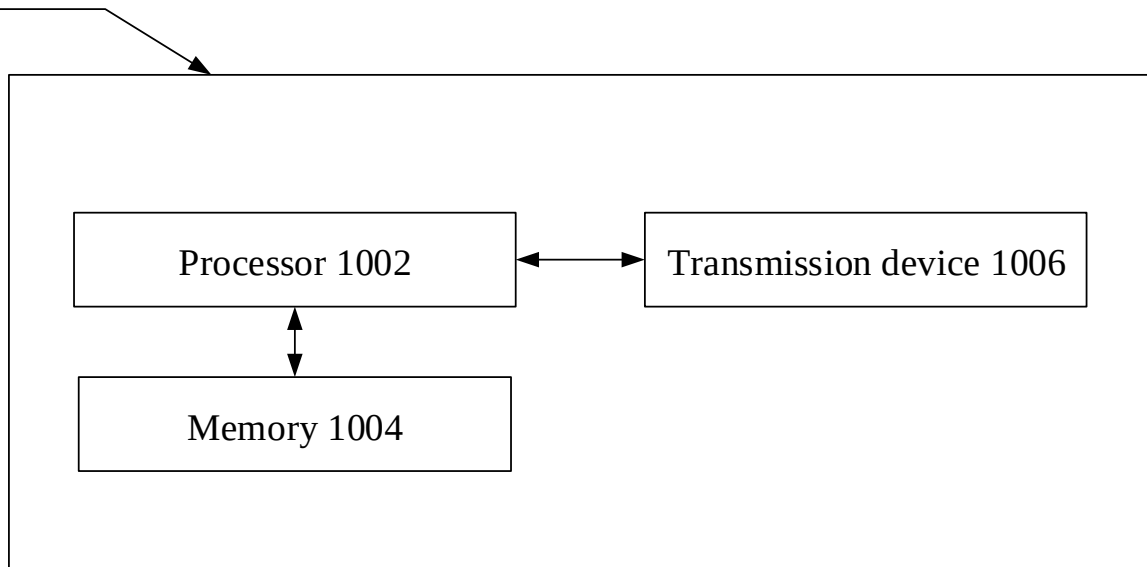


FIG. 8