



- (51) **International Patent Classification:**
H01R 13/658 (2011.01) *H01R 4/24* (2006.01)
H01R 13/6461 (2011.01)
- (21) **International Application Number:**
PCT/EP2011/071399
- (22) **International Filing Date:**
30 November 2011 (30.11.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
02029/10 6 December 2010 (06.12.2010) CH
- (71) **Applicant** (for all designated States except US): **BKS ENGINEERING AG** [CH/CH]; Fabrikstrasse 8, CH-4552 Derendingen (CH).
- (72) **Inventor; and**
- (75) **Inventor/Applicant** (for US only): **AFFELTRANGER, Walter** [CH/CH]; Schürli, CH-6214 Schenkon (CH).
- (74) **Agent:** **BOVARD AG**; Optingenstrasse 16, CH-3000 Bern 25 (CH).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))
— with amended claims (Art. 19(1))

(54) **Title:** MULTIPOLAR OUTLET FOR A CONDUCTOR CONNECTOR SYSTEM

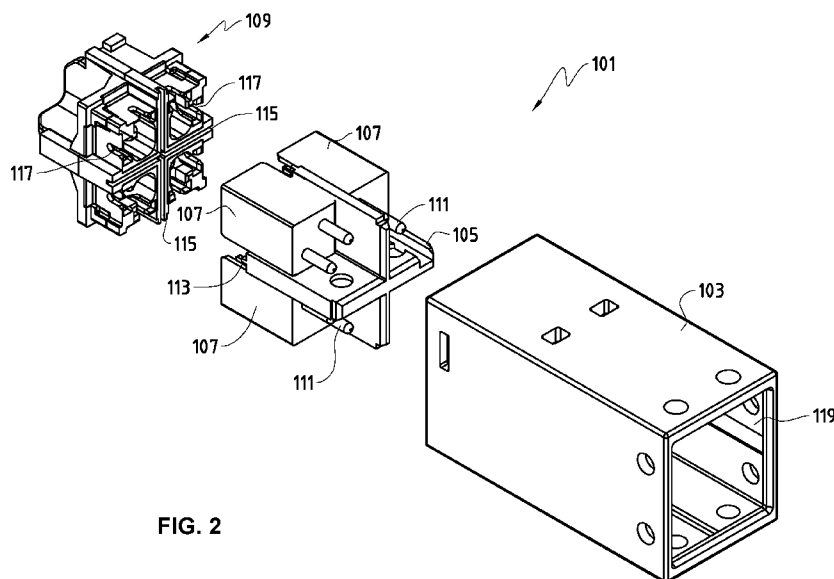


FIG. 2

(57) **Abstract:** The present invention relates to a multipolar outlet (101) for a conductor connector system. The outlet (101) comprises a housing (103), wherein the housing (103) is divided into at least two chambers, each chamber having two contacts (111) accessible from a first end of the chamber. The outlet (101) further comprises a separator (109) for separating conductor wires and for holding the wires in place in the separator (109), the separator (109) being arranged to form an end piece for the chambers at a second end, opposite to the first end, wherein the contacts (111) are arranged to be electrically connected to the wires when the separator (109) is in place in the housing (103).