

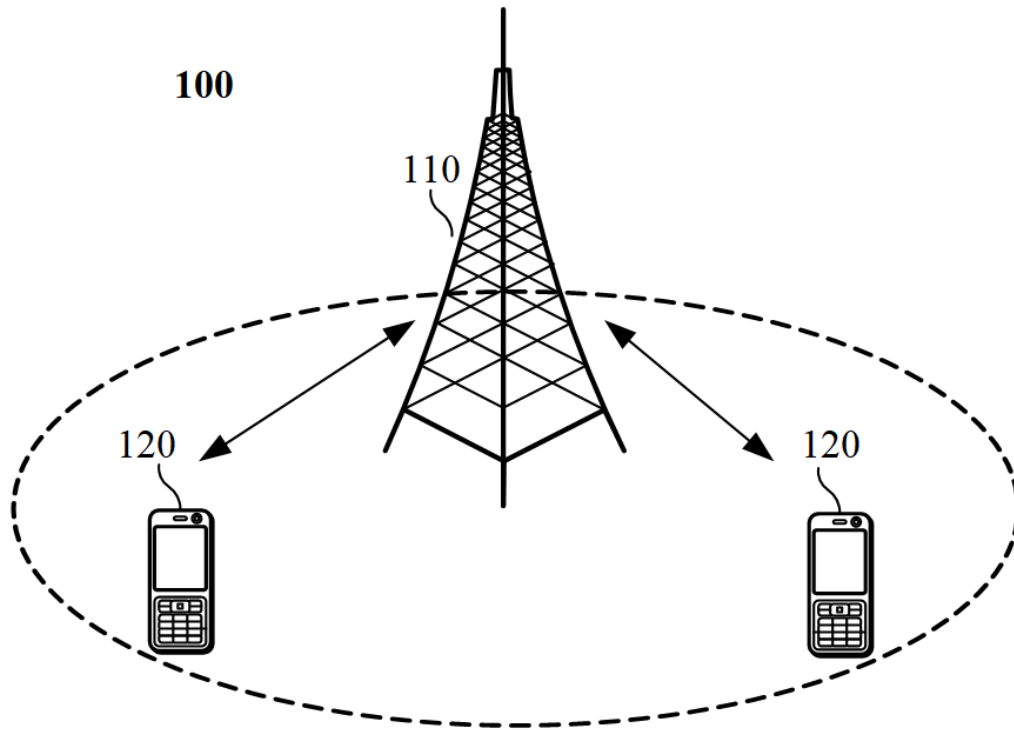


FIG. 1

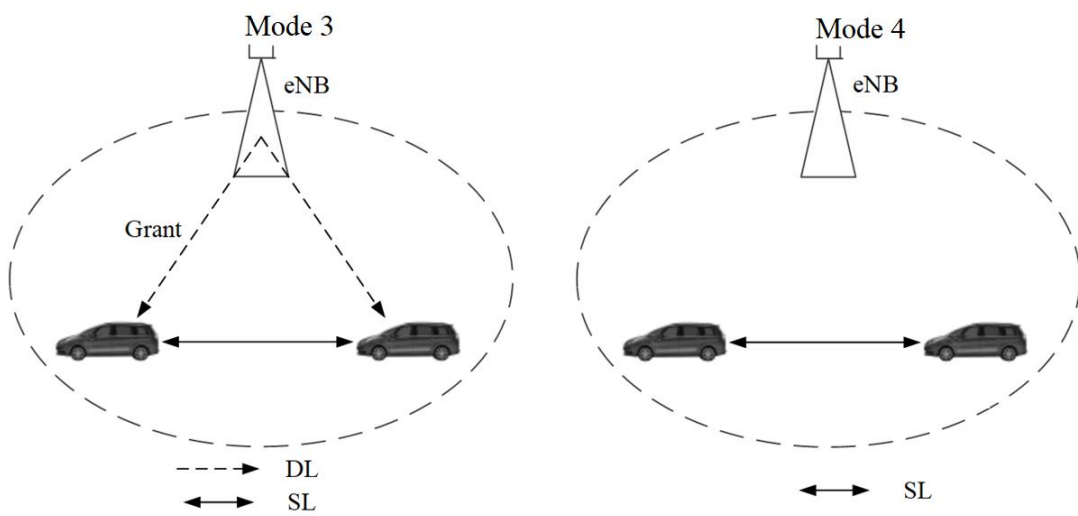


FIG. 2

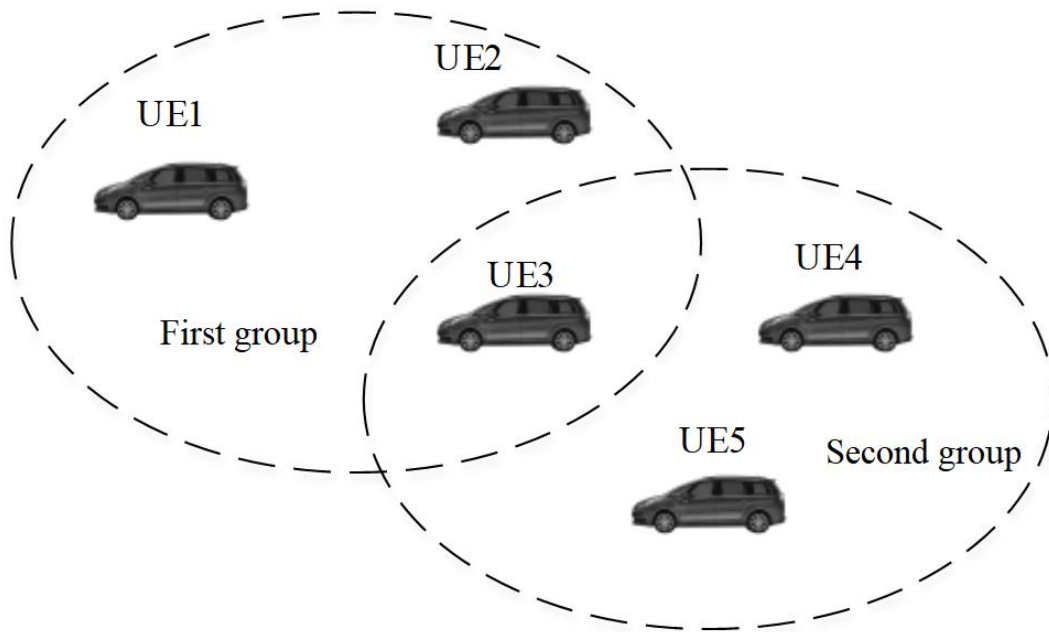


FIG. 3

200

When a terminal device determines, according to first configuration information, to receive a first sidelink transmission channel on a target transmission resource, and determines, according to second configuration information, to transmit a second sidelink transmission channel on the target transmission resource, the terminal device receives the first sidelink transmission channel or transmits the second sidelink transmission channel on the target transmission resource, according to a first rule

S210

FIG. 4

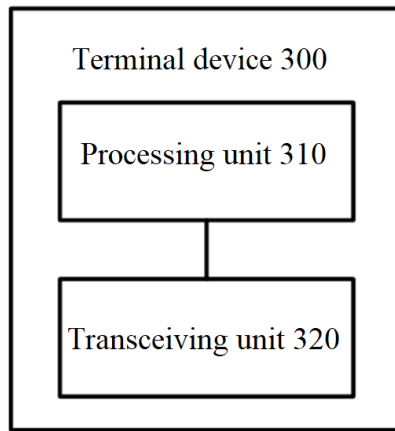


FIG. 5

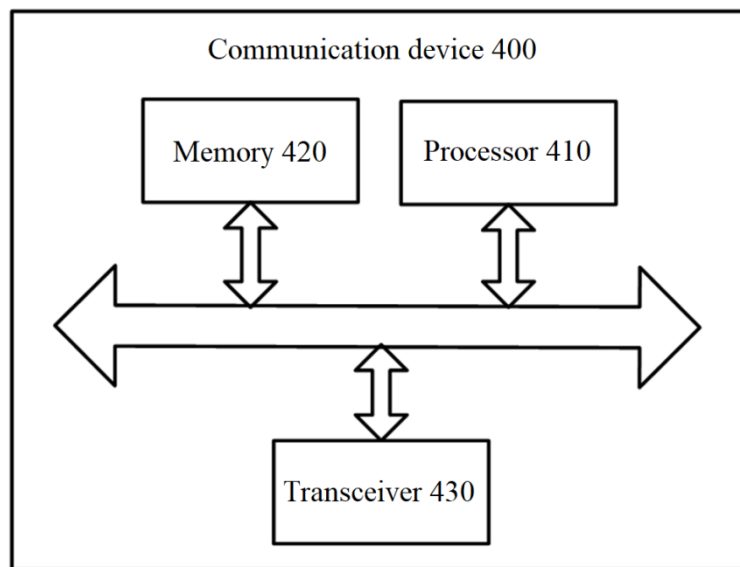


FIG. 6

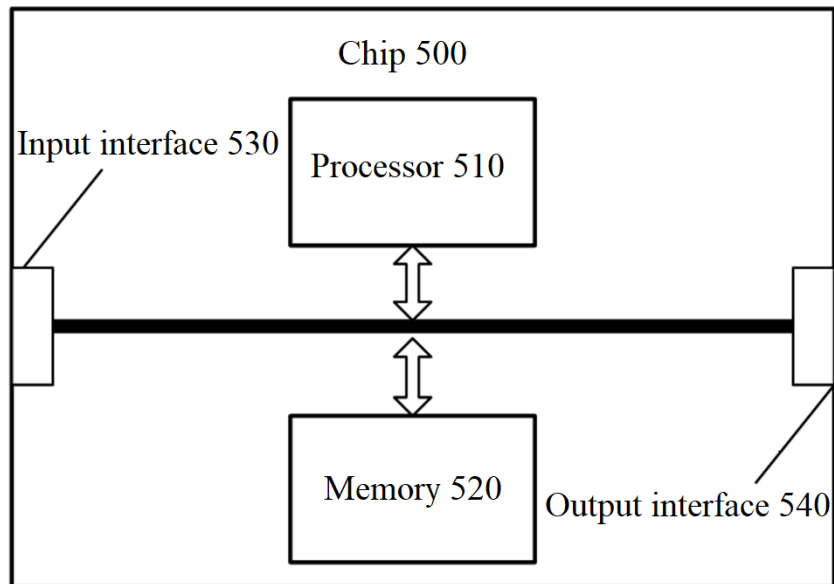


FIG. 7

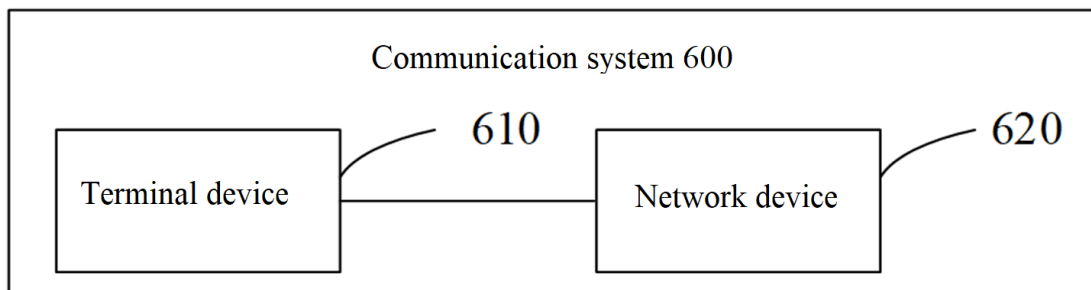


FIG. 8