



(51) International Patent Classification:

B29C 45/64 (2006.01) **B29C 45/80** (2006.01)
B29C 45/04 (2006.01)

(21) International Application Number:

PCT/CA2010/001799

(22) International Filing Date:

17 November 2010 (17.11.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/264,881 30 November 2009 (30.11.2009) US
61/264,883 30 November 2009 (30.11.2009) US

(71) Applicant (for all designated States except US): **HUSKY INJECTION MOLDING SYSTEMS LTD.** [CA/CA];
500 Queen Street South, Bolton, Ontario L7E 5S5 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HALTER, Christophe** [FR/BE]; 8, rue des Ecoles, B-6781 Selange (BE). **GLAESENER, Pierre** [LU/LU]; 40, rue de Mersch, L-7780 Bissen (LU). **STYGA, Francois** [DE/DE]; Brunnenstrasse 40, 66780 Fremersdorf (DE).

(74) Agent: **HUSKY INTELLECTUAL PROPERTY SERVICES**; c/o Husky Injection Molding Systems Ltd., 500 Queen Street South, Bolton, Ontario L7E 5S5 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: A MOLDED ARTICLE TRANSFER DEVICE WITH SHUTTLING MOVEMENT

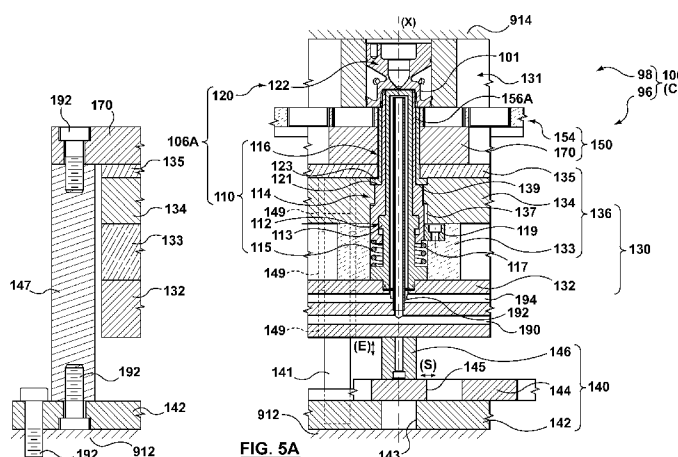

(57) Abstract: An in-mold shutter (140) for embedding in an injection mold (100, 200, 300) is described herein. The in-mold shutter (140, 240, 340, 440, 540) includes a shutter actuator (148, 548) that is configured to selectively engage a first mold shoe (130) of the injection mold (100, 200, 300) with a platen of a mold clamping assembly (996) to hold the first mold shoe (130) in an extended position (E), along a mold-stroke axis (X), during a step of molding a first molded article (102A) in the injection mold (100, 200, 300). Also described herein is a molded article transfer device (150, 250) for use with the injection mold (100, 200, 300). The molded article transfer device (150, 250) includes a shuttle (154) that is slidably arranged, in use, within the injection mold (100, 200, 300). The shuttle (154) defines a first aperture (156A), at least in part, that alternately accommodates: (i) a first mold stack (106A, 206A, 306A) arranged therein; and (ii) a first molded article (102A) received therein with opening of the first mold stack (106A, 206A, 306A).