



(51) International Patent Classification:
F21V 19/02 (2006.01) *F21V 17/00* (2006.01)

(21) International Application Number:
PCT/US2013/029189

(22) International Filing Date:
5 March 2013 (05.03.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/691,098 20 August 2012 (20.08.2012) US

(71) Applicant: COOPER TECHNOLOGIES COMPANY
[US/US]; 600 Travis St., Suite 5600, Houston, TX 77002
(US).

(72) Inventors: MANAHAN, Joseph, Michael; 4598 Brookhill Drive North, Manlius, NY 13104 (US). ROTHENBERGER, Richard; 5589 Thompson Road, Apartment 3, Syracuse, NY 13214 (US). GAWRONSKI, Grant, L.; 19 Hunters Crossing, The Woodlands, TX 77381 (US).

(74) Agent: KING & SPALDING LLP; Attn: Ip Docketing / Timothy M. Smith, 1100 Louisiana St., Suite 4000, Houston, TX 77002-5213 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: LIGHTING APPLICATIONS USING ORGANIC LIGHT EMITTING DIODES

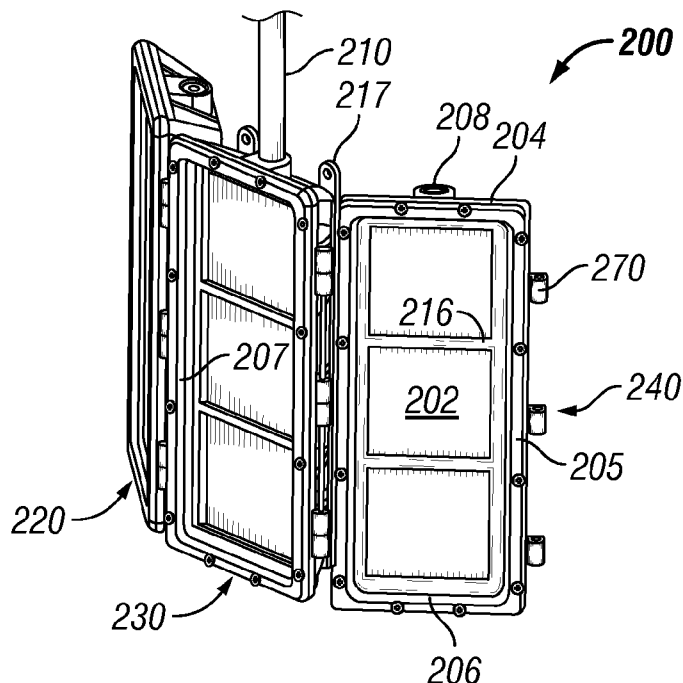


FIG. 2A

(57) Abstract: A lighting device that includes a first panel of light sources, where the first panel has a first edge. The lighting device can also include a second panel of light sources, where the second panel has a second edge, where the second edge of the second panel of light sources is mechanically coupled to the first, edge of the first panel of light sources. The first panel of light sources and the second panel of light sources can form an angle relative to each other. Adjusting the angle can adjust the light output from the light sources. Such an angle can be formed based on a target level of light received by a target area.



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*