

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(10) 国際公開番号

WO 2011/055507 A1

PCT


(43) 国際公開日
2011 年 5 月 12 日(12.05.2011)

- (51) 国際特許分類:
D06F 79/02 (2006.01) D06F 75/40 (2006.01)
- (21) 国際出願番号: PCT/JP2010/006275
- (22) 国際出願日: 2010 年 10 月 22 日(22.10.2010)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願 2009-252604 2009 年 11 月 4 日(04.11.2009) JP
- (71) 出願人 (米国を除く全ての指定国について): パナソニック株式会社(PANASONIC CORPORATION) [JP/JP]; 〒5718501 大阪府門真市大字門真 1 0 0 6 番地 Osaka (JP).
- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 藤本 洋 (FUJIMOTO, Hiroshi). 下坂 喜一 (SHIMOSAKA, Kiichi). 大塚 康晴 (OTSUKA, Yasuharu).
- (74) 代理人: 内藤 浩樹, 外 (NAITO, Hiroki et al.); 〒5718501 大阪府門真市大字門真 1 0 0 6 番地 パナソニック株式会社内 Osaka (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- 添付公開書類:
— 国際調査報告 (条約第 21 条(3))

(54) Title: CORDLESS IRON

(54) 発明の名称: コードレスアイロン

[図7]

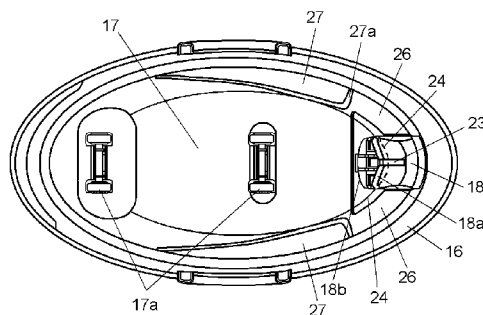

(57) Abstract: An iron main body comprises: a concave power-receiving section at the rear of a grip; and a power-receiving terminal within the power-receiving section. A stand (16) comprises: a placement section (17) on which the iron main body is placed at an inclination with the front thereof raised; a convex power supply section (18) at the rear of the placement section (17); and an electrode within the power supply section (18). A supporting section that projects perpendicularly rearward is formed within the power-receiving section. A slit (23) into which the supporting section fits is formed in the top face of the power supply section (18). A guidance section (18a) for guiding the supporting section is formed at the front face of the power supply section (18), and is inclined towards the slit (23). A protruding section (18b) for guiding the power-receiving section is formed at the bottom of the front face of the power supply section (18), and projects in the shape of an arc towards the power-receiving section. When the iron main body is placed on the stand (16), the power-receiving section is guided to the correct position of the power supply section (18) by means of the guidance section (18a) and the protruding section (18b), and electrical connection is reliably made between the power-receiving terminal and the electrode.

(57) 要約:

[続葉有]

WO 2011/055507 A1