

TITLE OF THE INVENTION:

Low halide lanthanum precursors for vapor deposition

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This patent application is a non-provisional of U.S. provisional patent application Serial No. 62/772,450, filed on November 28, 2018, which is incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

[0002] The invention relates generally to a composition comprising lanthanide such as lanthanum precursors containing 10.0 ppm or less and preferably < 5.0 ppm of halide impurities such as fluorine, chlorine, bromine or iodine. The invention also relates to the method for deposition of lanthanum-containing films, such as lanthanum oxide, metal oxide doped with lanthanum oxide, lanthanum nitride and metal nitride doped with lanthanum nitride. Lanthanum-containing films are used in electronic industrial applications.

[0003] Thin films of rare earth oxides are of interest because of their potential use as dielectrics in microelectronics applications. In particular, lanthanum oxide (La_2O_3) is attractive for a number of reasons including its favorable conduction band offset at the $\text{La}_2\text{O}_3/\text{Si}$ interface. This and other properties have led some to consider La_2O_3 or La-containing oxides for use as high- k materials in metal-oxide-semiconductor field effect transistors (MOSFETs) and capacitive devices. La_2O_3 has found use as a "capping layer" to adjust work functions in advanced MOSFETs.

[0004] Lanthanide complexes, such as lanthanum cyclopentadienyl and lanthanum amidinate complexes are widely used in electronic industry as precursors for chemical vapor deposition or atomic layer deposition of lanthanum-containing films. For various applications, semiconductor industry requires high purity precursors with trace metals and halide impurities well below single ppm's for metals and lower than 10.0 ppm for halides. This is because increasing the speed and complexity of semiconductor

integrated circuits requires advanced processes that put extreme constraints on the level of contamination allowed on the surfaces of silicon wafers.

[0005] Metallic and halide contaminations on wafer surface are known to be a serious limiting factor to yield and reliability of CMOS based integrated circuits. Such contamination degrades the performance of the ultrathin SiO₂ gate dielectrics that form the heart of the individual transistors. Halides impurities may migrate in the device and cause corrosion. The commonly reported mechanism for electrical field breakdown failure from iron contamination is the formation of iron precipitates at the Si-SiO₂ interface, which frequently penetrate the silicon dioxide. Halide impurities present in lanthanum precursors may also cause corrosion of stainless steel containers used for delivery of lanthanum containing precursors to the deposition tool and transfer of iron and other stainless steel metal impurities to the lanthanum-containing film causing device failure.

[0006] Thus, precursors with low levels of halide contamination are highly desired. Purification methods to produce precursors with low halide contamination are also desired.

[0007] Commonly used precursors for deposition of lanthanum-containing films are lanthanum amidinates or La(AMD)₃, such as for example tris (N,N'-di-isopropylformamidinato) lanthanum (III) or La(FAMD)₃, lanthanum cyclopentadienyl complexes, such as for example tris(isopropylcyclopentadienyl) lanthanum (III) or La(iPrCp)₃, and lanthanum diketonate complexes. Most common preparation of such lanthanum includes lanthanum halides as starting materials resulting in halide contamination.

[0008] Several methods were previously considered for purification of lanthanum compounds, for example crystallization and sublimation.

[0009] Hecker (US 2,743,169 A) taught a sublimation method that can be used for metal chlorides separation and purification. Typically, sublimation is operated at reduced pressure, which can enhance the productivity and reduced operation temperature. The product is usually formed on a cold wall, and is harvested at the end of the purification process in an inert environment, as most metal halides are air and moisture sensitive.

[0010] For better solid product uniformity, fluidized bed is often used. Another advantage of using fluidized bed is to allow for automation of solid handling, which is

difficult to implement with vacuum sublimation process. Schoener et al (US 4,478,600) taught a method of using fluidization as part of aluminum chloride purification process yielding controlled product particle size. In the art, raw aluminum chloride was firstly generated through chlorination reaction at high temperature, in vapor phase, followed by a condensing stage to remove most solid impurities. The vapor is then supplied into a fluidization chamber to form product particles. Non-condensable contents, such as chlorine, carbon dioxide, and fluidizing gas are passed through a cooling fin for temperature control. Part of the gas is recycled by a pump, whereas the rest is vented through a scrubber. In this work, cold fluidization zone is provided for product condensation and particle formation.

[0011] Thus, the objective of this invention is to provide lanthanide cyclopentadienyl or lanthanide amidinate complex containing less than 10.0 ppm of chloride, bromide and fluoride, preferably less than 5.0 ppm halide, and more preferably less than 1.0 ppm halide.


[0012] Another objective of this invention is to provide lanthanide formamidinate or $\text{La}(\text{FAMD})_3$ containing 50.0 ppm or less, 30.0 ppm or less, 20.0 ppm or less, 10.0 ppm or less, 5.0 ppm or less, or 2.0 ppm or less of all halide compounds combined.

[0013] Another objective of this invention is to provide a practical and scalable method for production of low halide lanthanide formamidinate.

BRIEF SUMMARY OF THE INVENTION

[0014] Accordingly, the present invention provides a low halide composition; a method and a system to purify a crude material comprising lanthanide amidinates, or more specifically lanthanum amidinate compounds to obtain the high purity composition comprising lanthanum amidinate compounds, and a delivery system to deliver the high purity composition comprising lanthanide amidinate compounds.

[0015] In one aspect, there is provided a lanthanide amidinate compound $\text{Ln}(\text{AMD})_3$ having Formula I

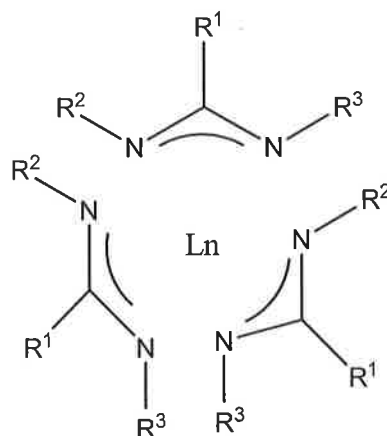


wherein R¹ is selected from the group consisting of hydrogen, and C₁ to C₅ linear or branched alkyl; R² and R² are independently selected from the group consisting C₁ to C₅ linear or branched alkyl; ; Ln is a lanthanide selected from the group consisting of La, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu;

the lanthanide amidinate compound comprises at least one halide impurity selected from the group consisting of chloride, bromide, fluoride, iodide and combinations thereof; wherein each of halide impurity ranges from 10.0 ppm or less, 5.0 ppm or less, 2.5 ppm or less, or 1.0 ppm or less; and all halide impurity combined ranges 50.0 ppm or less, 30.0 ppm or less, 20.0 ppm or less, 10.0 ppm or less, 5.0ppm or less, or 2.0ppm or less by weight.

[0016] The halide impurity comprises fluoride, chloride, iodide and/or bromide. The halide impurity forms volatile compounds that are deposited onto the film and have a negative effect on the dielectric constant.

[0017] In another aspect, there is provided practical and scalable method for production of high purity Lanthanide amidinate compounds; comprising

- a. providing the crude lanthanide amidinate material comprises lanthanide compound having Formula I

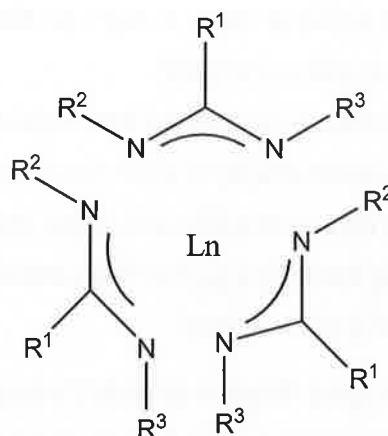

wherein R^1 is selected from the group consisting of hydrogen, and C_1 to C_5 linear or branched alkyl; R^2 and R^3 each is independently selected from the group consisting of C_1 to C_5 linear or branched alkyl; and Ln is a lanthanide selected from the group consisting of La, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu ; and

the crude lanthanide amidinate material comprises at least one impurity selected from the group consisting of (i) halide impurities selected from the group consisting of $LnCl_x(AMD)_y$ ($x+y=3$), $LnBr_x(AMD)_y$ ($x+y=3$), $LnF_x(AMD)_y$ ($x+y=3$), $LnI_x(AMD)_y$ ($x+y=3$), wherein x or y is selected from 1 or 2, and combinations thereof; (ii) light impurity $LnO(AMD)_2$, and (iii) trace metals, and (iv) trace amounts of non-volatile impurities Ln_2O_3 , $Ln(OH)_3$, or combinations;

- b. providing zone 1 comprising at least one sublimator, zone 2 comprising at least one condenser; and zone 3 comprising at least one cooler; optionally a separation unit installed between zone 1 and zone 2 and selected from the group consisting of convoluted pathway, glass wool, filter, and combinations thereof; wherein zone 2 is in fluid communication with zone 1 and zone 3 is in fluid communication with zone 2;
- c. heating the crude lanthanum amidinate material contained in the at least one sublimator in zone 1 to get crude lanthanum amidinate material vapor separated from the halide impurities and the trace amounts of non-volatile impurities;
- d. passing the crude lanthanide amidinate material vapor from the zone 1 to the at least one condenser in zone 2 and condensing the crude lanthanide


amidinate material vapor to form purified lanthanide amidinate material in the at least one condenser;

- e. passing the non-condensed light impurity LnO(AMD)_2 from the zone 2 into the at least one cooler in zone 3 to form solid light impurity;

wherein the purified lanthanide amidinate material comprises each of halide impurity ranging from 10.0 ppm or less and all halide impurities combined ranging from 50.0 ppm or less.

[0018] In yet another aspect, there is provided a system for purifying a crude lanthanide amidinate material for vapor deposition comprising

- a) the crude lanthanide amidinate material comprises lanthanide amidinate compound having Formula I

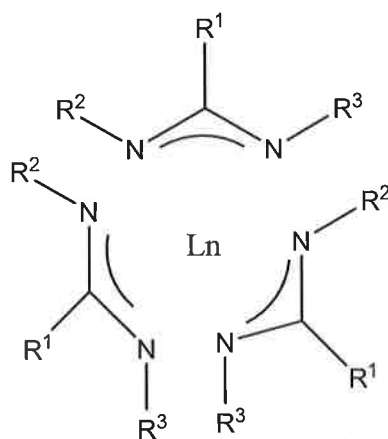

wherein R^1 is selected from the group consisting of hydrogen, and C_1 to C_5 linear or branched alkyl; R^2 and R^2 each is independently selected from the group consisting of C_1 to C_5 linear or branched alkyl; and Ln is a lanthanide selected from the group consisting of La, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu;

- b) zone 1 comprising at least one sublimer; wherein the crude lanthanide amidinate material is placed inside the at least one sublimer
- c) zone 2 comprising at least one condenser; wherein zone 2 is in fluid communication with zone 1; and
- d) zone 3 comprising at least one cooler; wherein zone 3 is in fluid communication with zone 2; and optionally

- e) a separation unit selected from the group consisting of convoluted pathway, glass wool, filter, and combinations thereof installed between zone 1 and zone 2;

wherein

the crude lanthanide amidinate material comprises 50 ppm or more at least one impurity selected from the group consisting of (i) halide impurities selected from the group consisting of $\text{LnCl}_x(\text{AMD})_y$ ($x+y=3$), $\text{LnBr}_x(\text{AMD})_y$ ($x+y=3$), $\text{LnF}_x(\text{AMD})_y$ ($x+y=3$), $\text{LnI}_x(\text{AMD})_y$ ($x+y=3$), wherein x or y is selected from 1 or 2, and combinations thereof; (ii) light impurities $\text{LnO}(\text{AMD})_2$, (iii) trace metals, and (iv) trace amounts of non-volatile impurities Ln_2O_3 , $\text{Ln}(\text{OH})_3$, or combinations;

and

purified lanthanide amidinate material is inside the at least one condenser in zone 2; and the purified lanthanide amidinate material comprises each of halide impurity ranging from 10.0 ppm or less and all halide impurities combined ranging from 50.0 ppm or less.

[0019] In yet another aspect, there is provided a delivery system or a vessel containing the purified lanthanide amidinate compound as disclosed above as a precursor.

BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS


[0020] Figure 1 is an exemplary purification system to remove halides.

[0021] Figure 2 is an exemplary purification system having a physical barrier (such as a filter) between raw material and purified material according to certain embodiments of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0022] The method and the system described in present invention are generally to remove impurities from Lanthanide amidinate compounds through phase changing process.

[0023] The purified lanthanide amidinate compound $\text{Ln}(\text{AMD})_3$ having Formula I

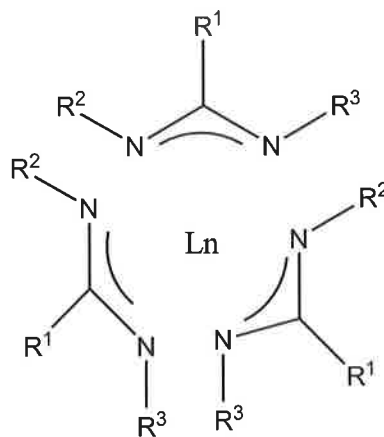

wherein R^1 is selected from the group consisting of hydrogen, and C_1 to C_5 linear or branched alkyl; R^2 and R^3 are independently selected from the group consisting C_1 to C_5 linear or branched alkyl; ; Ln is a lanthanide selected from the group consisting of La, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu;

the lanthanide amidinate compound comprises at least one halide impurity selected from the group consisting of chloride, bromide, iodide, fluoride and combinations thereof; wherein each of halide impurity ranges from 10.0 ppm or less, 5.0 ppm or less, 2.5 ppm or less, or 1.0 ppm or less; and all halide impurity combined ranges 50.0 ppm or less, 30.0 ppm or less, 20.0 ppm or less, 10.0 ppm or less, 5.0ppm or less, or 2.0ppm or less by weight.

[0024] The raw or crude lanthanide such as lanthanum material mainly comprises up to 99.8 wt. % of primarily target lanthanide amidinate, and 1 ppm or more, 2 ppm or more, 5 ppm or more, 10 ppm or more, 50 ppm or more, impurities including but are not limited to (i)less volatile impurities such as $LaCl_x(AMD)_y$ ($x+y=3$), $LaBr_x(AMD)_y$ ($x+y=3$); $LaI_x(AMD)_y$ ($x+y=3$); $LaF_x(AMD)_y$ ($x+y=3$), wherein x and y is selected from 1 or 2 ; (ii)light impurities such as $LaO(AMD)_2$, (iii) trace metals, and (iv)trace amounts of non-volatile impurities e.g. La_2O_3 , $La(OH)_3$, or combinations,

[0025] In general, raw or crude material is heated to certain temperature, under which lanthanide compounds are vaporized into gaseous phase in a vaporization chamber. The lanthanide compound vapor is then condensed into collecting chambers, with one of the chamber being the main fraction collector where the pure lanthanide amidinate compounds is collected and harvested. Non-volatile impurities are left in the

vaporization chamber as heel, whereas the low boiling point light impurities are collected into a chamber for light impurities collection.

[0026] One aspect of preparing pure lanthanide amidinate compounds is to remove less volatile lanthanide bromides, chlorides, iodides and fluorides from raw material. The final purified product contains 50.0 ppm or less, 30.0 ppm or less, 20.0 ppm or less, 10.0 ppm or less, 5.0ppm or less, 2.0ppm or less, or 1.00 ppm or less impurities.

[0027] According to the Thiele-McCabe method, separation of binary system at ppm level requires many theoretically plates, which is not available in vacuum sublimation or fluidized bed system.

[0028] Another aspect of preparing pure lanthanide amidinate compounds is to remove impurities with lower boiling point comparing to lanthanide formamidinate. These impurities can be separated through sublimation by utilizing different boiling points of product and impurities, through providing at least two temperature zones. Similarly, such separation can be achieved by utilizing different vapor pressures at a fixed temperature, and carrying low boiling impurities away with inert gas. By providing the suitable amount of inert gas, the Ln impurity can be kept in gaseous phase while most $\text{Ln}(\text{FAMD})_3$ can be condensed, and, hence achieving separation.

[0029] Yet another aspect of this invention is to prevent product contamination with trace amounts of non-volatile impurities accumulated in sublimation heels. Filter media is used to filter vapor of amidinate compound from trace amounts of less volatile solid particulates which can be carried over into lanthanum from amidinate vapor by dusting or other mechanism. Other metal and halide impurities may also be carried over by the same mechanism.

[0030] In most embodiments, a purification system comprises of three series connected chambers: a sublimator where the raw material is vaporized, a condenser where the product is collected, and a cooler where the light impurity is collected.

[0031] Crude or raw lanthanide amidinate compound, which typically has 70-99.5 wt.% of lanthanide amidinate compound balanced with other impurities, is loaded in the sublimator, and heated to vaporize lanthanide amidinate compound. The vapor is passed through a heat traced connecting pipe into the condenser. Lanthanide amidinate vapor is cooled down in condenser to form product. The light impurity, in vapor phase, is further

passed through a heat traced connecting pipe to enter the cooler, and is cooled down and condensed in the cooler.

[0032] In certain embodiments, the vapor is forced to pass through chambers by applying vacuum. In certain embodiments, the vapor is forced to pass through chambers by inert gas flow. Yet in certain embodiments, both vacuum and inert gas flow can be applied simultaneously to force the vapor flow.

[0033] In certain embodiments, the product and light impurities are condensed by cold surfaces. In other embodiments, the product and light impurities are condensed by cold inert gas. When condensed by cold inert gas, the condenser can be made into a fluidized bed so the product condensed in the gas stream can be nucleation seed and grow. By controlling the residence time in fluidized bed, uniformed product particle size and uniformed solid product purity can be achieved.

[0034] In all embodiment, a separation unit or particle trapper including but is not limited to convoluted pathway, glass wool, filter (such as a mediated filter), and combinations thereof; can be installed in the passage entering the condenser.

[0035] In certain embodiments, the chambers of the purification system are maintained at fixed temperature. In other embodiments, some chambers may vary temperature during purification process, to allow for better separation of light impurities.

[0036] Any of the above features can be combined with any of one or more other features. Other advantages, novel features, and uses of the present disclosure will become more apparent from the following detailed description of non-limiting embodiments when considered in conjunction with the accompanying drawings, which are schematic and which are not intended to be drawn to scale or to exact shape. In the figures, each identical, or substantially similar component that is illustrated in various figures is typically represented by a single numeral or notation. For purposes of clarity, not every component is labeled in every figure, nor is every component of each embodiment shown where illustration is not necessary to allow those of ordinary skill in the art to understand the invention.

[0037] An example of the present invention is shown in Figure 1.

[0038] In some embodiments, the purification system 100 shown in Figure 1 comprises at least one sublimmer (101), at least one condenser (104), and at least one cooler (105).

[0039] The sublimator (101) is filled with raw amidinate compound material (201A). The sublimator is heated to a predetermined temperature, cause the raw material to vaporize and generate raw material vapor (202). The vapor is then enters the condenser (104) for product (204) collection. The none-condensed light impurity (205) is then passed into the cooler (105), and condensed there for forming solid light impurity (205).

[0040] Another example of the present invention is shown in Figure 2.

[0041] In some embodiments, the purification system 100A shown in Figure 2 comprises at least one sublimator (101), at least one mediated filter (103), at least one condenser (104), and at least one cooler (105).

[0042] The sublimator (101) is filled with raw amidinate compound material (201A). The sublimator is heated to a predetermined temperature, cause the raw material to vaporize and generate raw material vapor (202). The vapor is then directed through a heat traced pipe (106), passed through a mediated filter (103) which serves as a physical barrier between raw material and purified material, and then enters the condenser (104) for product (204) collection. The none-condensed light impurity (205) is then passed into the cooler (105), and condensed there for forming solid light impurity (205).

[0043] In some embodiments, the purification system 100 or 100A is operated under vacuum. The system can be connected to a vacuum source for such purpose (not shown).

[0044] In other embodiments, the purification system 100 or 100A is operated using carrier gas, and is under slight positive pressure. This can be done by supplying an inert gas, such as N₂, to the system (not shown).

[0045] Yet in other embodiments, the purification system 100 or 100A is operated under vacuum and using carrier gas, as vacuum and carrier gas can be supplied to the system at the same time.

[0046] In some embodiments, the product vapor supplied to the condenser is cooled by condenser surface. In other embodiments, the product vapor supplied to the condenser is cooled by a stream of cold inert gas (121)(not shown). Furthermore, the cold inert gas stream can be introduced through a distribution plate to form fluidized bed. Either way, the purified product (204) is collected in the condenser.

[0047] In some embodiments, the light impurity vapor (205) can pass the condenser by maintaining the condenser at high temperature at the beginning of the process, i.e., the

same temperature as the sublimers. Once all the light impurities have been vaporized and passed through the condenser, the condenser temperature is reduced to cumulate product.

[0048] In other embodiments when cooling gas is used to condense the product, the condenser temperature can be maintained at a fix level under which the impurity vapor pressure is higher than the impurity concentration in the gaseous phase, and hence no impurity will condense in the condenser.

[0049] In some embodiments, the impurity vapor (205) supplied to the cooler is cooled by cooler surface. In other embodiments, the impurity vapor supplied to the cooler is cooled by a stream of cold inert gas (122) (not shown). Either way, the light impurity (205) is collected in the cooler.

[0050] In some embodiments, deep vacuum (<1 torr abs) is used for operation. The typical operation temperature for Zone 1 (see Figure 1) is between $60\text{ }^{\circ}\text{C}$ to $200\text{ }^{\circ}\text{C}$, between $100\text{ }^{\circ}\text{C}$ to $180\text{ }^{\circ}\text{C}$, or between $120\text{ }^{\circ}\text{C}$ to $160\text{ }^{\circ}\text{C}$. The typical startup operation temperature for Zone 2 is between $80\text{ }^{\circ}\text{C}$ to $200\text{ }^{\circ}\text{C}$, between $100\text{ }^{\circ}\text{C}$ to $180\text{ }^{\circ}\text{C}$, or between $120\text{ }^{\circ}\text{C}$ to $160\text{ }^{\circ}\text{C}$, to remove the light impurities. After the light impurities are removed, the typical operation temperature for Zone 2 is between $20\text{ }^{\circ}\text{C}$ to $100\text{ }^{\circ}\text{C}$, $20\text{ }^{\circ}\text{C}$ to $80\text{ }^{\circ}\text{C}$, or between $20\text{ }^{\circ}\text{C}$ to $60\text{ }^{\circ}\text{C}$. The typical operation temperature for zone 3 is below $30\text{ }^{\circ}\text{C}$ at any given time.

[0051] In some embodiments, fluidized bed is used in condenser for better solid product uniformity. One key element to achieve the above mentioned yield and economic aspect is to control the ratio of inlet fluidizing gas to the inlet amidinate compound vapor at the bottom of the condenser. It is important to keep the ratio low, so carryover or product by the gas is limited. Since this gas stream is also a cooling source for the inlet vapor, there is a lower limit for the ratio according to mass and heat balance. In general, the fluidizing gas will be heated majorly by the latent heat released from crystallization. Ideally, in the above mentioned temperature ranges, and ambient temperature N_2 gas is used.

[0052] Yet another key to achieve good crystal growth and high yield is to feed the condenser with high concentration of vapor. This can be achieved by providing high temperature to the sublimers, or limiting the carrying gas supplied to the sublimers. Combination of both options is preferred. In operation, it is preferable to keep the carrying gas to vapor boil up ratio to be $< 10:1$, preferable $< 5:1$, and more preferable

<2:1, in molar unit. The sublimator should be heated to the upper limit mentioned above, depending on the operation pressure. That way, with high vapor concentration in the feed, less process residence time is achieved for the same amount of raw material, leading to less carryover of material as the total amount of gas passed through is reduced. In another embodiment lanthanide formamidinate is dissolved in inert solvent and the solution is eluted via adsorbent bed filled with inert adsorbent with high affinity for halide. Solvent is removed from purified lanthanide formamidinate and lanthanide formamidinate is further purified by the methods described above.

[0053] In certain embodiments, delivery systems or vessels are provided for depositing lanthanide-containing film comprises lanthanide cyclopentadienyl or lanthanide amidinate complex containing < 10.0 ppm, preferably < 5.0 ppm and more preferably < 2.5 ppm of Br; and < 20.0 ppm, preferably < 10.0 ppm of all halide impurity combined.

[0054] The vessel may be connected to deposition equipment known in the art by use of a valved closure and a sealable outlet connection.

[0055] Most preferably, the vessels may be constructed of high purity materials, including stainless steel, glass, fused quartz, polytetrafluoroethylene, PFA®, FEP®, Tefzel® and the like. The vessels may be sealed with one or more valves. The headspace of the vessel is preferably filled with a suitable gas such as nitrogen, argon, helium or carbon monoxide.

Examples

Example 1.

Vacuum sublimation with raw lanthanum formamidinate $\text{La}(\text{FAMD})_3$ having R^1 hydrogen, $\text{R}^2=\text{R}^3=\text{iso-propyl}$ using Purification System 100

[0056] The purification system 100 shown in Figure 1 was used.

[0057] 600 gram of raw lanthanum formamidinate $\text{La}(\text{FAMD})_3$ material was purchased from Strem Chemicals Inc., 7 Muliken Way, Newburyport, MA and placed into the sublimator 101. The halides and trace metals in the raw material were measured by ion chromatography (IC) and were listed in Table I.

[0058] The system was evacuated to < 0.5 torr abs pressure.

[0059] The sublimator was heated to 70 °C. The condenser was heated to 70 °C for the first 5 hours. After 5 hours the sublimator was heated to 160 °C and the condenser was run at room temperature (RT 20 to 25 °C) where the amidinate compound was condensed. The cooler was maintained at room temperature all the time

Table I

	Raw	Purified
La(FAMD) ₃ Assay	99.7 wt. %	99.9 wt. %
Chloride	5.7 ppm	1.8 ppm
Bromide	583 ppm	19.8 ppm
Li [No Gas]	0.01	0.01
Na [No Gas]	0.05	0.04
Mg [No Gas]	0.01	0.01
Al [No Gas]	0.01	0.01
K [H ₂]	0.08	0.1
Ca [H ₂]	0.01	0.13
Ti [No Gas]	0.01	0.01
Cr [H ₂]	0.02	0.03
Mn [No Gas]	0.01	0.01
Fe [H ₂]	0.02	0.06
Co [No Gas]	0.01	0.01
Ni [No Gas]	0.01	0.01
Cu [No Gas]	0.01	0.02
Zn [No Gas]	0.01	0.07

[0060] The process was stopped after 24 hours.

[0061] 197 gram of product was collected.

[0062] The halides and trace metals in the product were measured by Ion chromatography (IC), and listed in Table I.

[0063] The results indicated that sublimation reduced halide contents. However, chloride was around 1 ppm and bromide concentration was above 50 ppm.

[0064] The results also showed that the system was not efficient to reduce trace metals. Please notice the low level of the trace metals initially contained in the raw material.

Example 2

Vacuum sublimation of raw lanthanum formamidinate $\text{La}(\text{FAMD})_3$ having $\text{R}^1 = \text{hydrogen}$, $\text{R}^2=\text{R}^3=\text{iso-propyl}$ using Purification System 100A

[0065] The purification system 100A shown in Figure 2 was used.

[0066] 193 grams of raw $\text{La}(\text{FAMD})_3$ material was purchased from Strem Chemicals Inc., 7 Muliken Way, Newburyport, MA and placed into sublimator. The halides and trace metals in the raw material were measured by Ion chromatography (IC) and were listed in Table 2.

Table II

	Raw	Product
$\text{La}(\text{FAMD})_3$ Assay	99.72%	99.8%
Chloride	5.7 ppm	0.9 ppm
Bromide	563.8ppm	1.0 ppm
Li [No Gas]	0.01	0.01
Na [No Gas]	2.19	0.04
Mg [No Gas]	0.05	<0.03
Al [No Gas]	0.09	0.03
K [H2]	0.08	0.04
Ca [H2]	0.14	<0.08
Ti [No Gas]	<0.03	<0.03
Cr [H2]	0.09	0.02
Mn [No Gas]	0.01	0.01
Fe [H2]	0.4	0.07
Co [No Gas]	<0.02	<0.02
Ni [No Gas]	<0.03	<0.03
Cu [No Gas]	0.05	0.02
Zn [No Gas]	0.06	<0.05

[0067] A glass coarse fritted disc with porosity 40-60 micron was purchased from Chemglass Life Science LLC, 3800 N Mill Rd, Vineland, NJ 08360 and used as the mediated filter 103.

[0068] The system was evacuated to < 0.5 torr abs pressure.

[0069] The sublimers was heated to 140 °C. The filter was heated to 200 °C. The condenser was heated to 140 °C for the first 24 hours, and then reduced to room temperature where the amidinate compound was condensed. The cooler was maintained at room temperature all the time.

[0070] The process was stopped as the filter clogged the passage, usually after 48 hours.

[0071] 40 grams of product was collected. The halides and trace metals in the product were measured by Ion chromatography (IC) in Table II.


[0072] The results indicated that chloride was effectively removed below 1 ppm by using system described in Figure 2 and bromide was reduced to 1ppm as well.

[0073] The results also showed that there was a consistency of the reduction of the trace metals, considering the low level of the trace metals initially contained in the raw material. The system used in this example was more effective to reduce the trace metals.

[0074] While the principles of the claimed invention have been described above in connection with preferred embodiments, it is to be clearly understood that this description is made only by way of example and not as a limitation of the scope of the claimed invention.

CLAIMS

1. A composition comprising lanthanide amidinate compound $\text{Ln}(\text{AMD})_3$ having Formula I

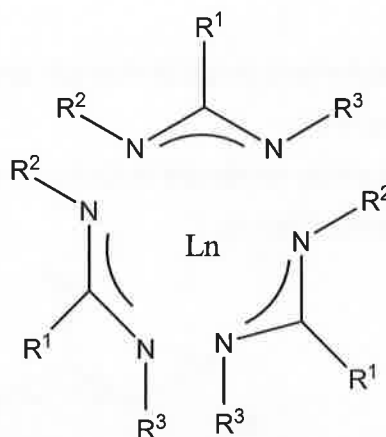


wherein R^1 is selected from the group consisting of hydrogen, and C_1 to C_5 linear or branched alkyl; and R^2 and R^2 each is independently selected from the group consisting of C_1 to C_5 linear or branched alkyl; Ln is a lanthanide selected from the group consisting of La, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu;

wherein the composition comprises at least one halide impurity and each of halide impurity ranges from 10.0 ppm or less; and all halide impurities combined ranges 50.0 ppm or less.

2. The composition of Claim 1, wherein the at least one halide impurity is selected from the group consisting of chloride, bromide, iodide, fluoride and combinations thereof; and each of halide impurity ranges from 5.0 ppm or less.
3. The composition of Claim 1, wherein the composition comprising ≤ 1.0 ppm chloride, ≤ 1.0 ppm bromide, ≤ 1.0 ppm iodide, and ≤ 1.0 ppm fluoride.
4. The composition of Claim 1, wherein R^1 is hydrogen and the lanthanide amidinate compound is selected from the group consisting of $\text{La}(\text{FAMD})_3$, $\text{Ce}(\text{FAMD})_3$, $\text{Pr}(\text{FAMD})_3$, $\text{Nd}(\text{FAMD})_3$, $\text{Pm}(\text{FAMD})_3$, $\text{Sm}(\text{FAMD})_3$, $\text{Eu}(\text{FAMD})_3$,

Gd(FAMD)₃, Tb(FAMD)₃, Dy(FAMD)₃, Ho(FAMD)₃, Er(FAMD)₃, Tm(FAMD)₃, Yb(FAMD)₃, and Lu(FAMD)₃.

5. The composition of Claim 1, wherein the lanthanide is lanthanum and R¹ is hydrogen.
6. A system for purifying a crude lanthanide amidinate material for vapor deposition comprising
 - f) the crude lanthanide amidinate material comprises lanthanide amidinate compound having Formula I

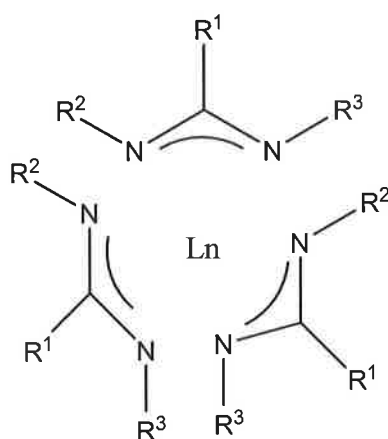

wherein R¹ is selected from the group consisting of hydrogen, and C₁ to C₅ linear or branched alkyl; and R² and R² each is independently selected from the group consisting of C₁ to C₅ linear or branched alkyl; Ln is a lanthanide selected from the group consisting of La, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu;

- g) zone 1 comprising at least one sublimers; wherein the crude lanthanide amidinate material is placed inside the at least one sublimers;
- h) zone 2 comprising at least one condenser; wherein the zone 2 is in fluid communication with the zone 1;
- i) zone 3 comprising at least one cooler; wherein the zone 3 is in fluid communication with the zone 2; and optionally
- j) a separation unit selected from the group consisting of convoluted pathway, glass wool, filter, and combinations thereof; wherein the separation unit is installed between the zone 1 and the zone 2;

wherein

the crude lanthanide amidinate material comprises 50 ppm or more at least one impurity selected from the group consisting of (i) halide impurities selected from the group consisting of $\text{LnCl}_x(\text{AMD})_y$ ($x+y=3$), $\text{LnBr}_x(\text{AMD})_y$ ($x+y=3$), $\text{LnI}_x(\text{AMD})_y$ ($x+y=3$), $\text{LnF}_x(\text{AMD})_y$ ($x+y=3$), wherein x or y is selected from 1 or 2, and combinations thereof; (ii) light impurities $\text{LnO}(\text{AMD})_2$, (iii) trace metals, and (iv) trace amounts of non-volatile impurities Ln_2O_3 , $\text{Ln}(\text{OH})_3$, or combinations;


and

purified lanthanide amidinate material is inside the at least one condenser in the zone 2; and the purified lanthanide amidinate material comprises each of halide impurity ranging from 10.0 ppm or less and all halide impurities combined ranging from 50.0 ppm or less.

7. The system of claim 6, wherein the purified lanthanide amidinate material comprises each of halide impurity ranging from 5.0 ppm or less.
8. The system of claim 6, wherein the lanthanide amidinate compound is selected from the group consisting of $\text{La}(\text{FAMD})_3$, $\text{Ce}(\text{FAMD})_3$, $\text{Pr}(\text{FAMD})_3$, $\text{Nd}(\text{FAMD})_3$, $\text{Pm}(\text{FAMD})_3$, $\text{Sm}(\text{FAMD})_3$, $\text{Eu}(\text{FAMD})_3$, $\text{Gd}(\text{FAMD})_3$, $\text{Tb}(\text{FAMD})_3$, $\text{Dy}(\text{FAMD})_3$, $\text{Ho}(\text{FAMD})_3$, $\text{Er}(\text{FAMD})_3$, $\text{Tm}(\text{FAMD})_3$, $\text{Yb}(\text{FAMD})_3$, and $\text{Lu}(\text{FAMD})_3$.
9. The system of claim 6, wherein the lanthanide is lanthanum and R^1 is hydrogen.
10. The system of claim 6, wherein the system comprises the separation unit and the purified lanthanide amidinate material comprises each of halide impurity ranging from 2.0 ppm or less.
11. The system of claim 6, wherein the system comprises the separation unit and the purified lanthanide amidinate material comprises each of halide impurity ranging from 1.0 ppm or less.

12. A method for purifying a crude lanthanide amidinate material for vapor deposition comprising

- a. providing the crude lanthanide amidinate material comprises lanthanide compound having Formula I

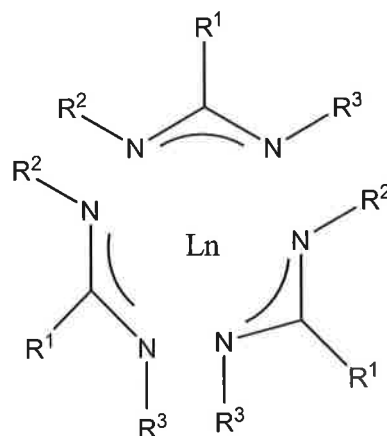

wherein R¹ is selected from the group consisting of hydrogen, and C₁ to C₅ linear or branched alkyl; and R² and R² each is independently selected from the group consisting of C₁ to C₅ linear or branched alkyl; Ln is a lanthanide selected from the group consisting of La, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu;

and

the crude lanthanide amidinate material comprises at least one impurity selected from the group consisting of (i) halide impurities selected from the group consisting of LnCl_x(AMD)_y (x+y=3), LnBr_x(AMD)_y (x+y=3), LnI_x(AMD)_y (x+y=3), LnF_x(AMD)_y (x+y=3), wherein x or y is selected from 1 or 2, and combinations thereof; (ii) light impurity LnO(AMD)₂, and (iii) trace amounts of non-volatile impurities Ln₂O₃, Ln(OH)₃, or combinations;

- b. providing zone 1 comprising at least one sublimizer, zone 2 comprising at least one condenser; and zone 3 comprising at least one cooler; optionally a separation unit installed between the zone 1 and the zone 2 and the separation unit is selected from the group consisting of convoluted pathway, glass wool, filter, and combinations thereof;

wherein the zone 2 is in fluid communication with the zone 1 and the zone 3 is in fluid communication with the zone 2;

- c. heating the crude lanthanide amidinate material contained in the at least one sublimator in the zone 1 to get crude lanthanide amidinate material vapor separated from the halide impurities and the trace amounts of non-volatile impurities;
 - d. passing the crude lanthanide amidinate material vapor from the zone 1 to the at least one condenser in the zone 2 and condensing the crude lanthanide amidinate material vapor to form purified lanthanide amidinate material in the at least one condenser;
 - e. passing the non-condensed light impurity LnO(AMD)_2 from the zone 2 into the at least one cooler in the zone 3 to form solid light impurity;
- wherein the purified lanthanide amidinate material comprises each of halide impurity ranging from 10.0 ppm or less and all halide impurities combined ranging from 50.0 ppm or less.

13. The method of claim 12, wherein temperatures are set between 60 °C to 200 °C in zone 1; between 100 °C to 180 °C in zone 1; and below 30 °C in zone 3.


14. The method of claim 12, wherein the lanthanide amidinate compound is selected from the group consisting of La(FAMD)_3 , Ce(FAMD)_3 , Pr(FAMD)_3 , Nd(FAMD)_3 , Pm(FAMD)_3 , Sm(FAMD)_3 , Eu(FAMD)_3 , Gd(FAMD)_3 , Tb(FAMD)_3 , Dy(FAMD)_3 , Ho(FAMD)_3 , Er(FAMD)_3 , Tm(FAMD)_3 , Yb(FAMD)_3 , and Lu(FAMD)_3 .

15. The method of claim 12, wherein the lanthanide is lanthanum and R^1 is hydrogen.

16. The method of claim 12, wherein the purified lanthanide amidinate material comprises each of halide impurity ranging from 5.0 ppm or less.

17. The method of claim 12, wherein the separation unit is used and the purified lanthanide amidinate material comprises each of halide impurity ranging from 2.0 ppm or less.

18. The method of claim 12, wherein the separation unit is used and the purified lanthanide amidinate material comprises each of halide impurity ranging from 1.0 ppm or less.
19. A vessel containing a composition comprising lanthanide amidinate compound $\text{Ln}(\text{AMD})_3$ having Formula I

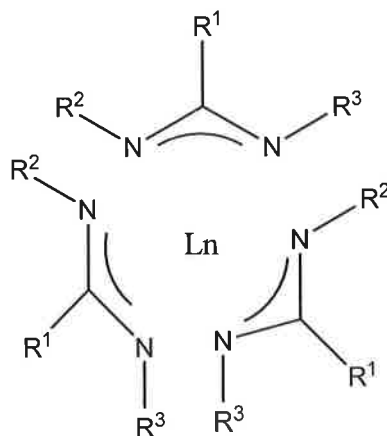

wherein R^1 is selected from the group consisting of hydrogen, and C_1 to C_5 linear or branched alkyl; and R^2 and R^2 each is independently selected from the group consisting of C_1 to C_5 linear or branched alkyl; Ln is a lanthanide metal selected from the group consisting of La, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu;

wherein the composition comprises at least one halide impurity and each of halide impurity ranges from 10.0 ppm or less; and all halide impurities combined ranges 50.0 ppm or less.

20. The vessel of Claim 19, wherein the at least one halide impurity is selected from the group consisting of chloride, bromide, iodide, fluoride and combinations thereof; and each of halide impurity ranges from 5.0 ppm or less.
21. The vessel of Claim 19, wherein the lanthanide amidinate compound is selected from the group consisting of $\text{La}(\text{FAMD})_3$, $\text{Ce}(\text{FAMD})_3$, $\text{Pr}(\text{FAMD})_3$, $\text{Nd}(\text{FAMD})_3$, $\text{Pm}(\text{FAMD})_3$, $\text{Sm}(\text{FAMD})_3$, $\text{Eu}(\text{FAMD})_3$, $\text{Gd}(\text{FAMD})_3$, $\text{Tb}(\text{FAMD})_3$, $\text{Dy}(\text{FAMD})_3$, $\text{Ho}(\text{FAMD})_3$, $\text{Er}(\text{FAMD})_3$, $\text{Tm}(\text{FAMD})_3$, $\text{Yb}(\text{FAMD})_3$, and $\text{Lu}(\text{FAMD})_3$.

22. The vessel of Claim 19, wherein the lanthanide is lanthanum and R¹ is hydrogen.
23. The vessel of Claim 19, wherein the composition comprising ≤ 1.0 ppm chloride, ≤ 1.0 ppm bromide, ≤ 1.0 ppm iodide, and ≤ 1.0 ppm fluoride.