

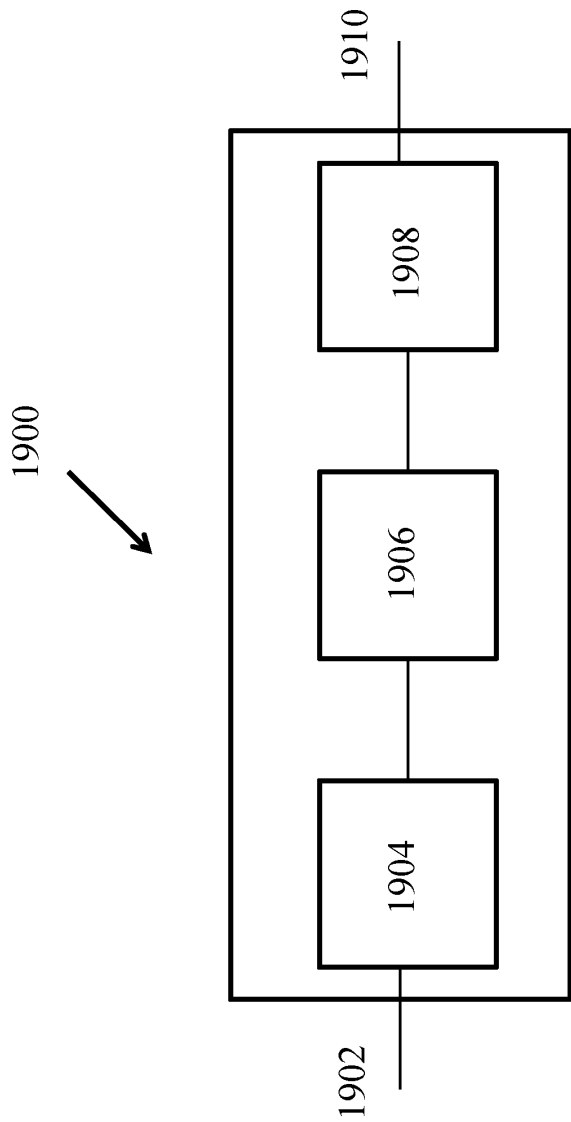


FIG. 1

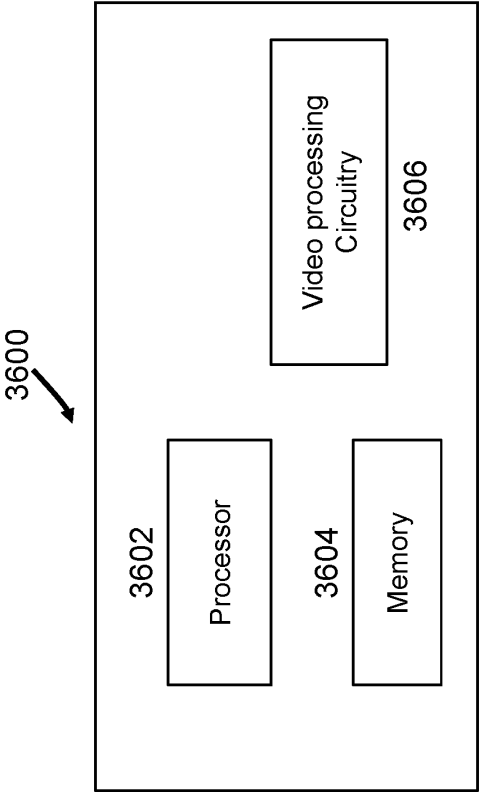


FIG. 2


3000



3002

performing a conversion between a video
comprising one or more video blocks and a coded
representation of the video

FIG. 3

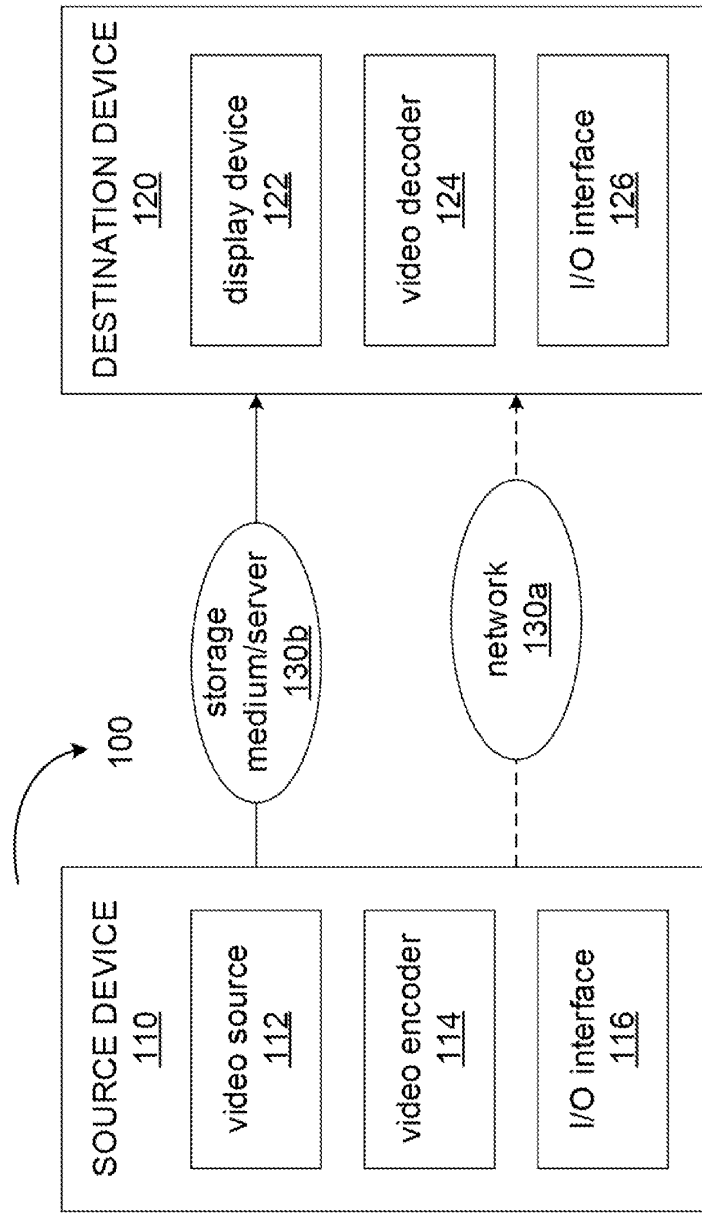**FIG. 4**


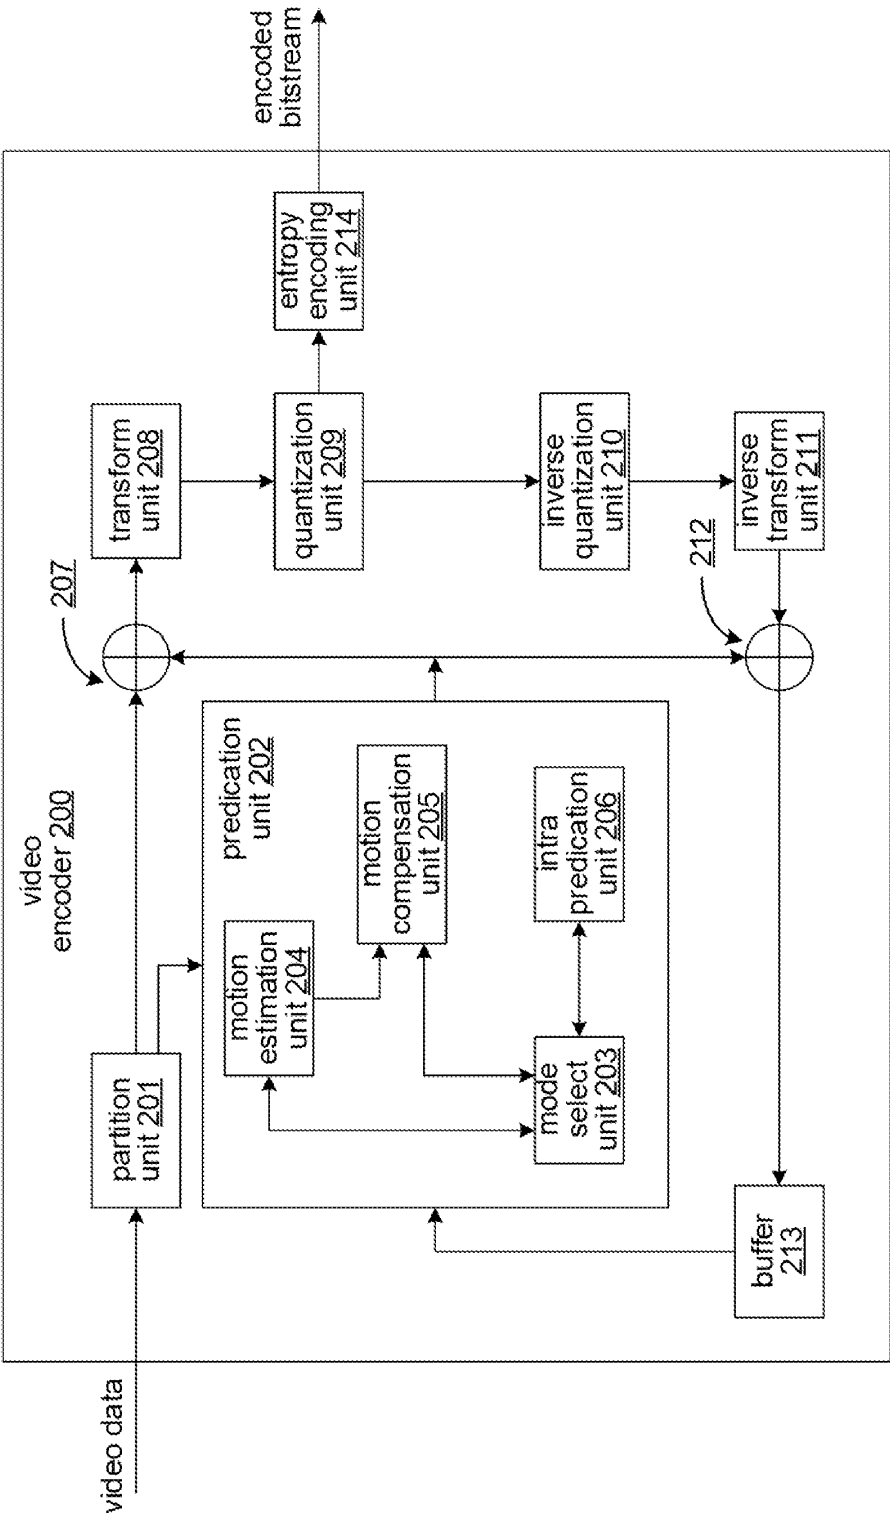


FIG. 5

**FIG. 6**

700

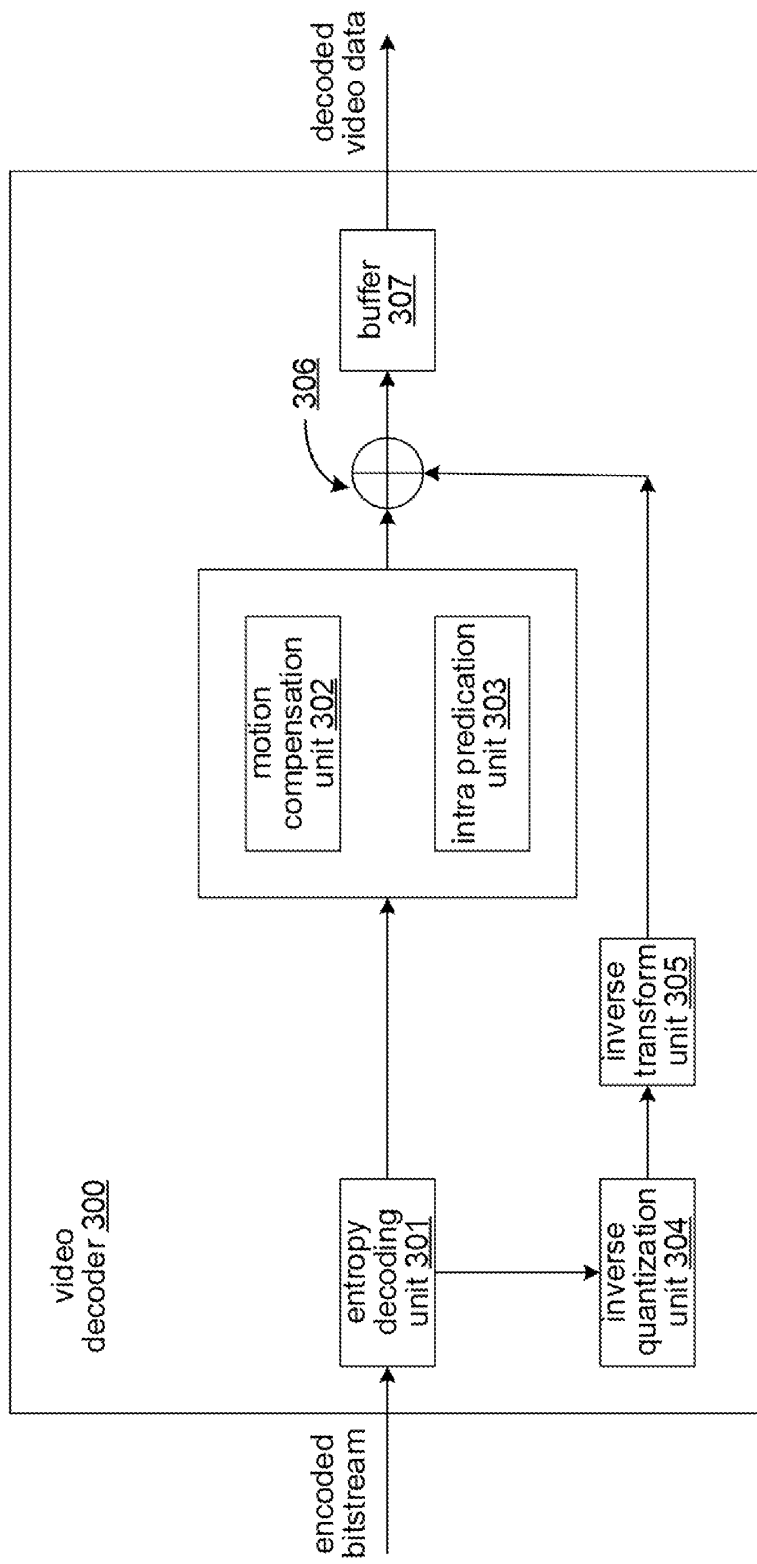

performing a conversion between a video picture of a video and a bitstream of the video, where a first syntax element in a first video unit level specifying a deblocking parameter offset for β divided by 2 applied to a chroma component for one or more slices in a first video unit and a second syntax element in the first video unit level specifying a deblocking parameter offset for tC divided by 2 applied to the chroma component for the one or more slices in the first video unit are determined according to a rule in response to the first syntax element and the second syntax element not included in the bitstream

710

7/7

FIG. 7