



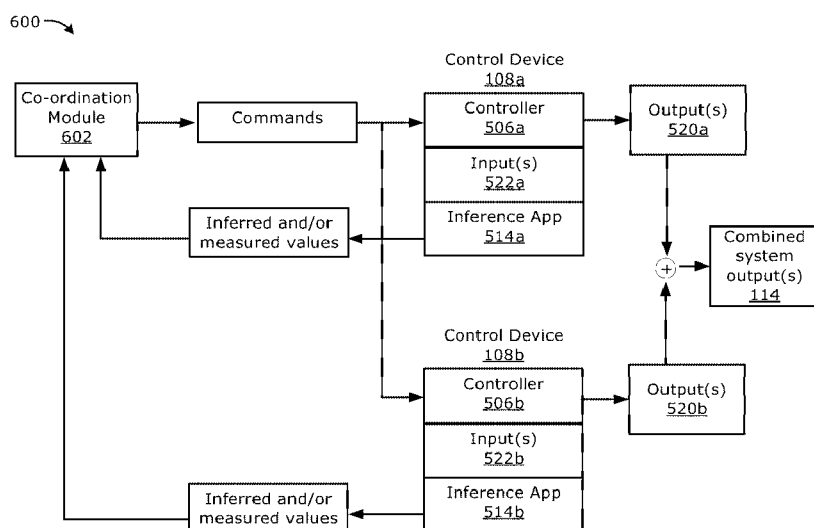
- (51) **International Patent Classification:**
G05D 7/06 (2006.01) *G05B 99/00* (2006.01)
- (21) **International Application Number:**
PCT/CA2013/050867
- (22) **International Filing Date:**
13 November 2013 (13.11.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/736,051 12 December 2012 (12.12.2012) US
61/753,549 17 January 2013 (17.01.2013) US
- (71) **Applicant:** S. A. ARMSTRONG LIMITED [CA/CA]; 23
Bertrand Avenue, Scarborough, Ontario M1L 2P3 (CA).
- (72) **Inventor:** ACOSTA GONZALEZ, Marcelo Javier; 23
Bertrand Avenue, Scarborough, Ontario M1L 2P3 (CA).
- (74) **Agent:** RIDOUT & MAYBEE LLP; 250 University Ave-
nue, 5th Floor, Toronto, Ontario M5H 3E5 (CA).
- (81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** CO-ORDINATED SENSORLESS CONTROL SYSTEM**FIGURE 6**

(57) **Abstract:** A method and system for co-ordinating control of a plurality of sensorless devices. Each device includes a communication subsystem and configured to self-detect one or more device properties, the device properties resulting in output having one or more output properties. The method includes: detecting inputs including the one or more device properties of each device, correlating, for each device, the detected one or more device properties to the one or more output properties, and co-ordinating control of each of the devices to operate at least one of their respective device properties to co-ordinate one or more output properties to the combined output to achieve a setpoint. In some example embodiments, the setpoint can be fixed, calculated or externally determined.