

1/3


Primary Option (# 1): Extrusion Process (with multiple powder feeds)

FIG. 1






FIG. 2

2/3

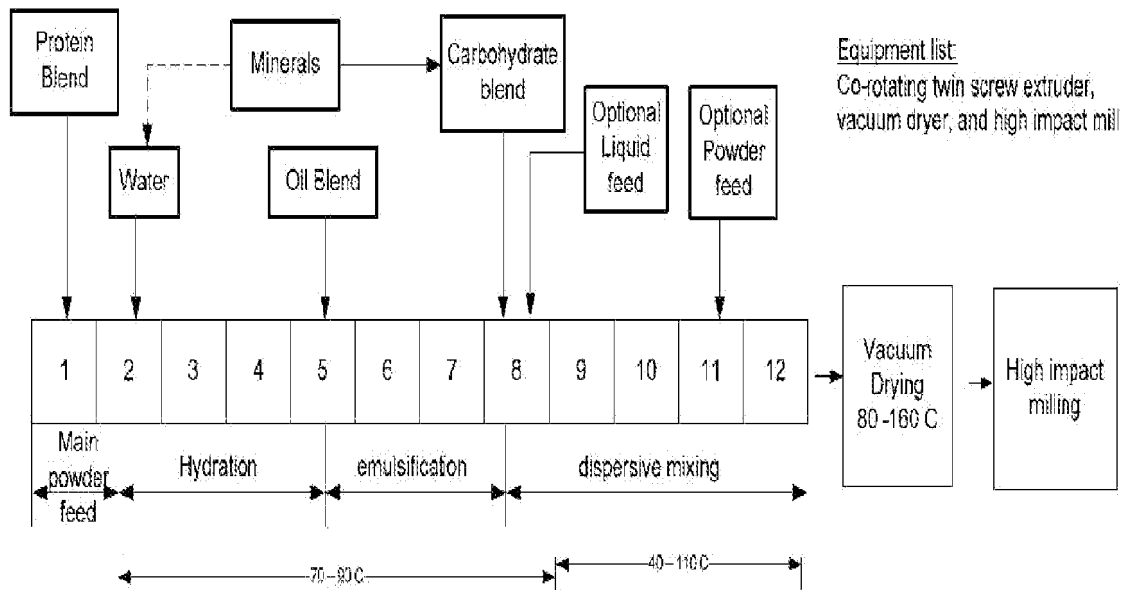

30 min at RT

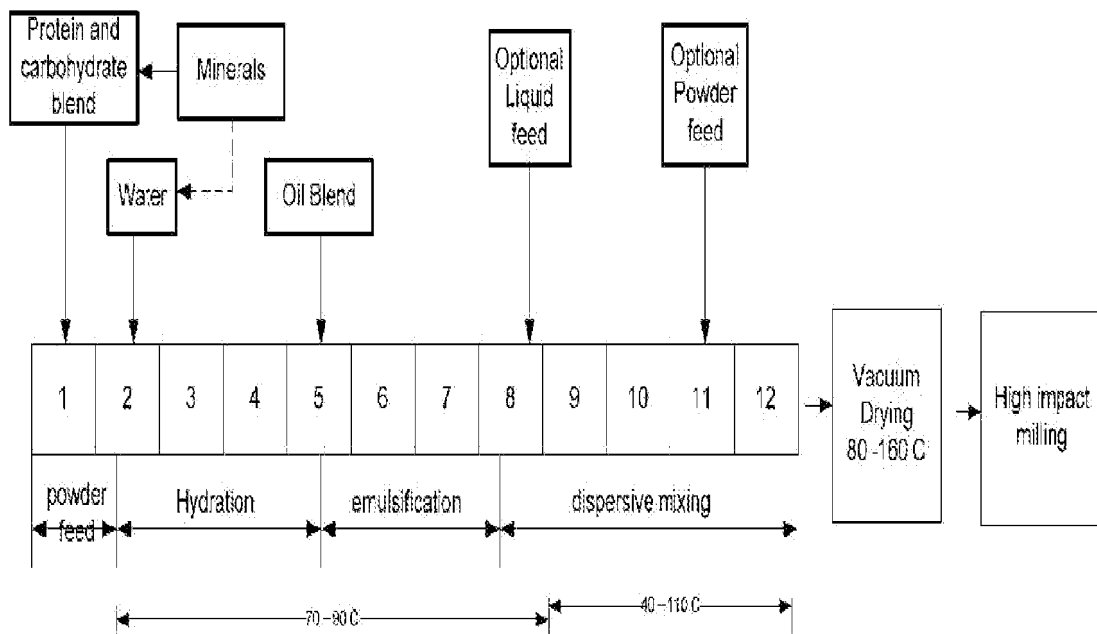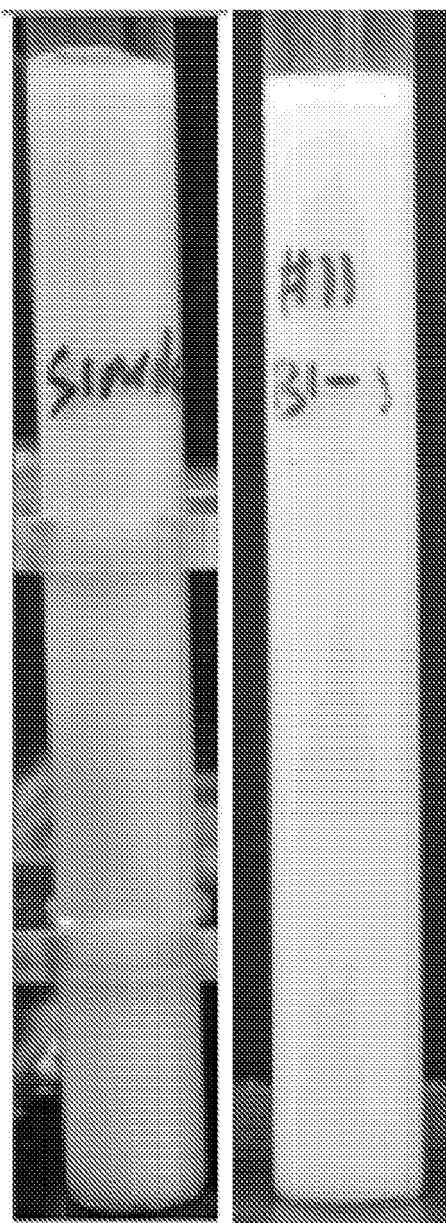
FIG.3A

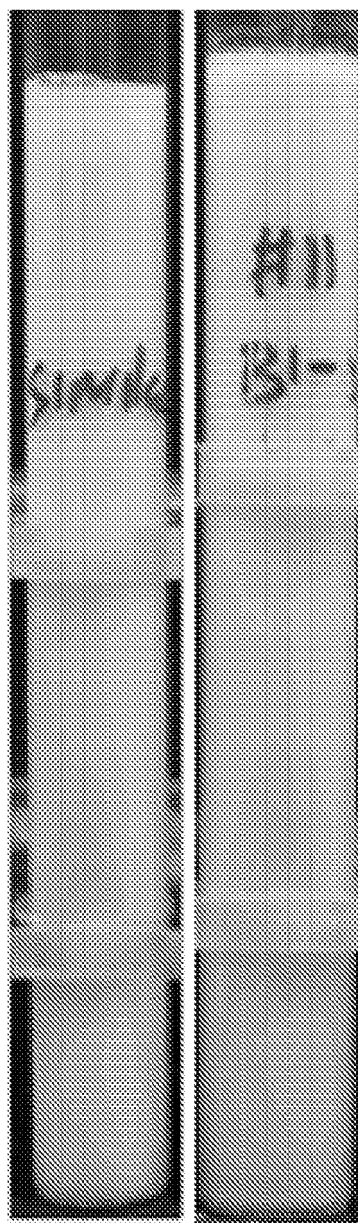

24 hrs at 40F


FIG. 3B

3/3

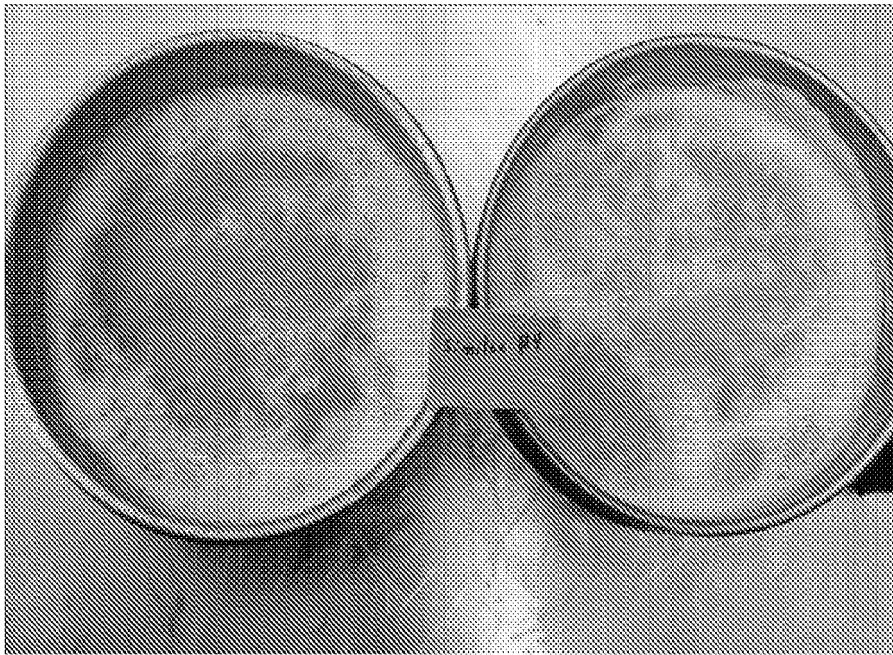

Spray Dried Similac, Dispersibility rating = 1

FIG. 4A

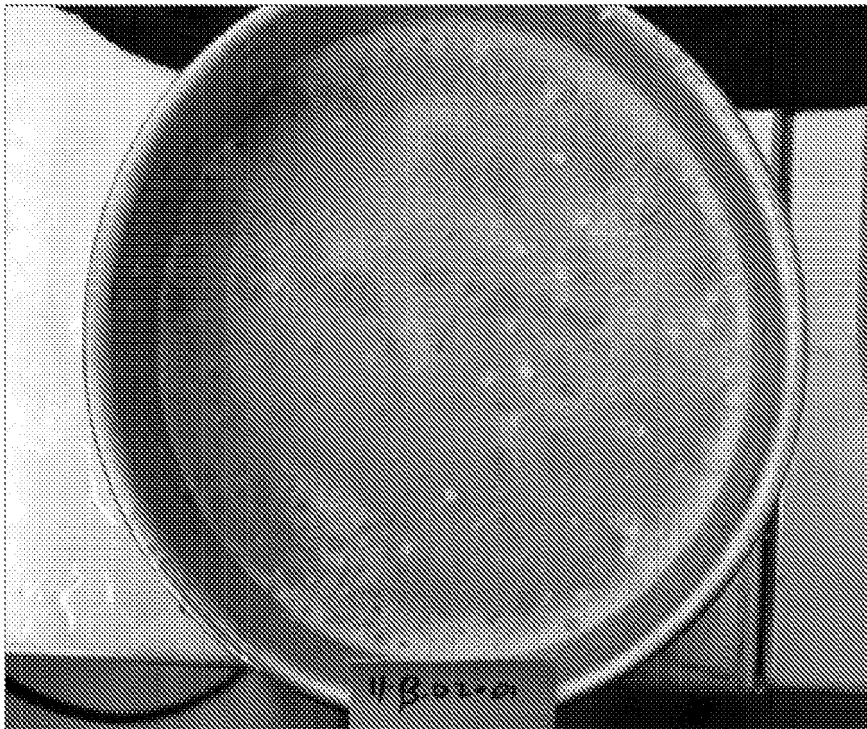

Extruded Similac, Dispersibility rating = 2

FIG. 4B