



(51) International Patent Classification:
E05B 63/08 (2006.01)

(21) International Application Number:
PCT/AU2010/001707

(22) International Filing Date:
21 December 2010 (21.12.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2009906268 23 December 2009 (23.12.2009) AU

(71) Applicant (for all designated States except US): **ASSA ABLOY AUSTRALIA PTY LIMITED** [AU/AU]; 235 Huntingdale Road, Oakleigh, Victoria 3166 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NEWMAN, Donald, John** [AU/AU]; 18 Tyalla Court, Hampton Park, Victoria 3976 (AU).

(74) Agent: **PHILLIPS ORMONDE FITZPATRICK**; Level 21, 22 & 23, 367 Collins Street, Melbourne, Victoria 3000 (AU).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MORTICE LOCK ACTUATOR

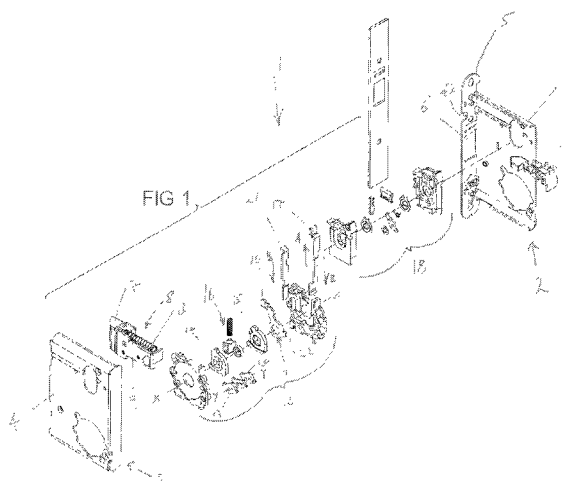

(57) Abstract: This invention relates to an actuator assembly (18) for use with a mortice lock assembly (1) having a bolt 8 with biasing means (13) for biasing the bolt (8) towards an extended position. An inner hub (14) in an outer hub (15) being operable to move the bolt (8) relative to the extended position. A detent means controls operation of the inner hub (14) and outer hub (15). The actuator assembly including a housing (23, 24) and an inner cam (25) and an outer cam (26) so that each cam (25 or 26) can operate in a latching mode or a locking mode.