




- (51) International Patent Classification:  
*E02F 3/92* (2006.01) *E02F 3/90* (2006.01)  
*E02F 3/88* (2006.01)
- (21) International Application Number:  
PCT/NL2013/050934
- (22) International Filing Date:  
20 December 2013 (20.12.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
2010029 20 December 2012 (20.12.2012) NL
- (71) Applicant: IHC HOLLAND IE B.V. [NL/NL];  
Molendijk 94, NL-3361 EP Sliedrecht (NL).
- (72) Inventors: VAN OPSTAL, Timothy Alexander;  
Boezemkade 99, NL-3031 BB Rotterdam (NL). BIJ-  
VOET, Erwin Cornelis Johannes; Waterwilg 12, NL-  
4761 WN Zevenbergen (NL). KONING, Theodorus Ad-  
rianus; Rietveen 31, NL-4823 HK Breda (NL).
- (74) Agent: NEDERLANDSCH OCTROOIBUREAU;  
Nederlandsch Octrooibureau, J.W. Frisolaan 13, NL-2517  
JS The Hague (NL).
- (81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,  
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,  
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,  
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,  
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,  
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,  
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,  
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,  
ZW.
- (84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,  
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,  
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,  
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: DREDGING ARRANGEMENT COMPRISING A BIASING DEVICE

Fig. 2a

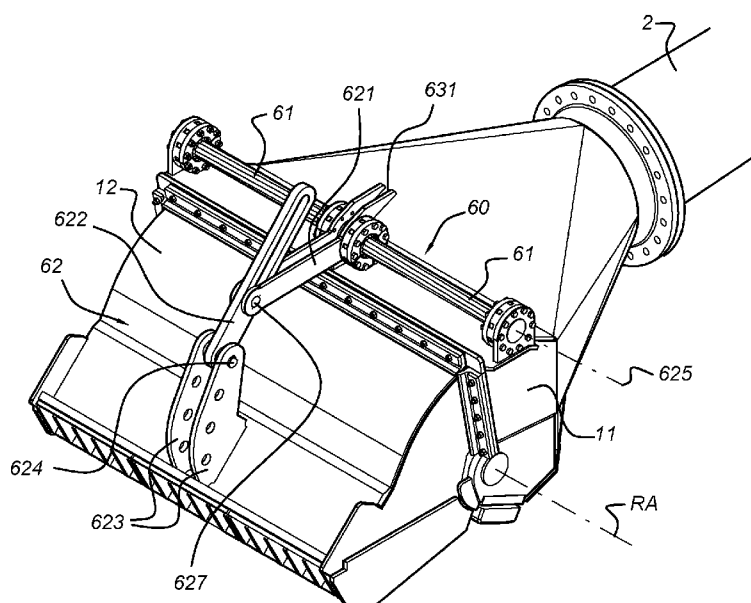

(57) Abstract: The invention relates to a dredging arrangement for dredging material from an underwater bottom (6). The dredging arrangement comprises a drag head body (11) and a visor (12), the visor (12) being connected to the drag head body (11) and is moveable with respect to the drag head body (11) over a predetermined range. The biasing device (60) is provided in between the drag head body (11) and the visor (12) exerting a biasing force on the visor (12) over a biasing portion of the predetermined range, the biasing portion being at least 25% of the range.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,  
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, KM, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments (Rule 48.2(h))*

**Published:**

— *with international search report (Art. 21(3))*