



(51) International Patent Classification:

G06F 3/12 (2006.01) *H04N 1/00* (2006.01)
B41J 5/30 (2006.01) *H04N 1/21* (2006.01)
B41J 29/38 (2006.01)

(21) International Application Number:

PCT/JP2010/054466

(22) International Filing Date:

10 March 2010 (10.03.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2009-067036 18 March 2009 (18.03.2009) JP

(71) Applicant (for all designated States except US): **RICOH COMPANY, LIMITED** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MATSUSHITA, Mitsugu** [JP/JP]; c/o RICOH COMPANY, LIMITED, 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

(74) Agent: **SAKAI, Hiroaki**; Sakai International Patent Office, Kasumigaseki Building, 2-5, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 1006020 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims and statement (Art. 19(1))

(54) Title: IMAGE FORMING APPARATUS, IMAGE FORMING METHOD, AND PROGRAM

FIG.1

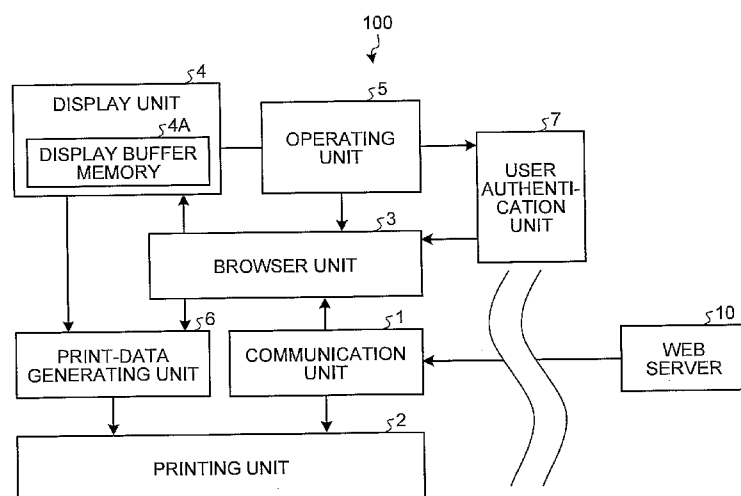

(57) Abstract: A browser unit controls a communication unit in response to an operation to an operating unit, and acquires Web content from a Web server. The Web content is displayed on a display unit under control in accordance with display control information based on the Web content acquired by the browser unit. When a print instruction of the Web content is operated to the operating unit, a print-data generating unit generates print data for performing printing in page units based on the display control information for the Web content. The print data is supplied to a printing unit, where it is printed on a paper. Because the print data is generated based on the display control information for causing the Web content to be displayed, the Web content displayed on a screen can be printed in page units.