




[Fig. 1]

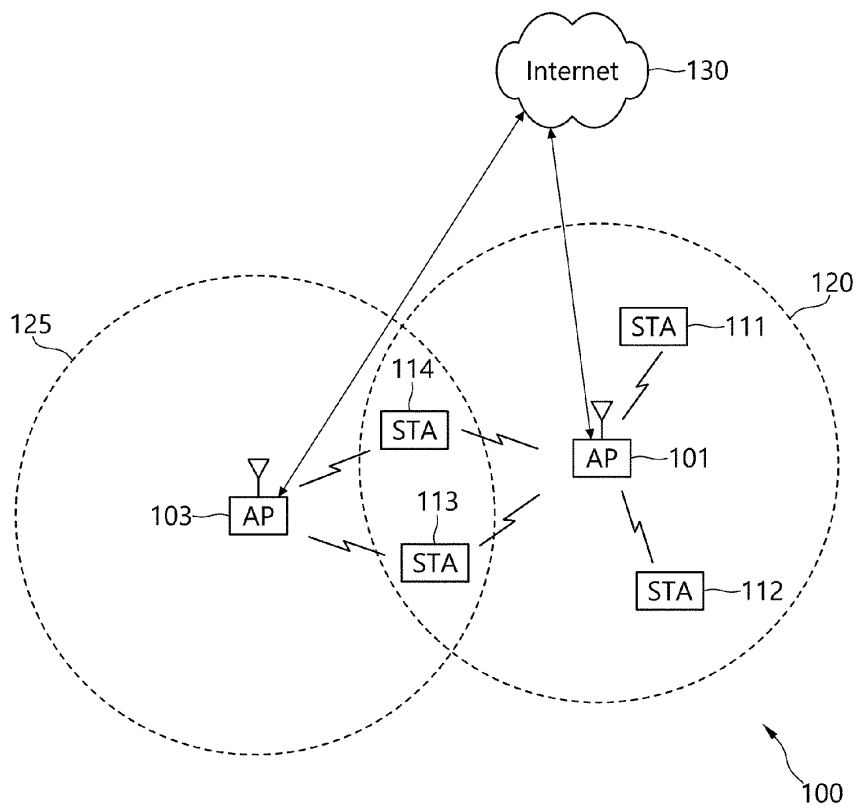


[Fig. 2a]

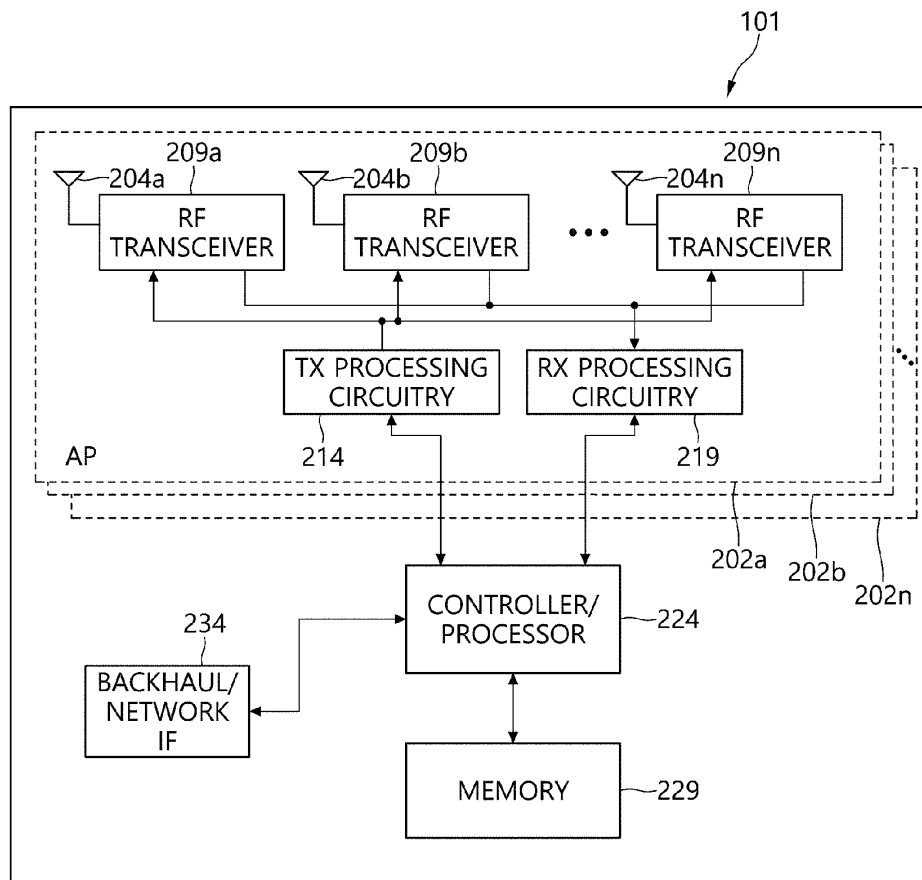


[Fig. 2b]

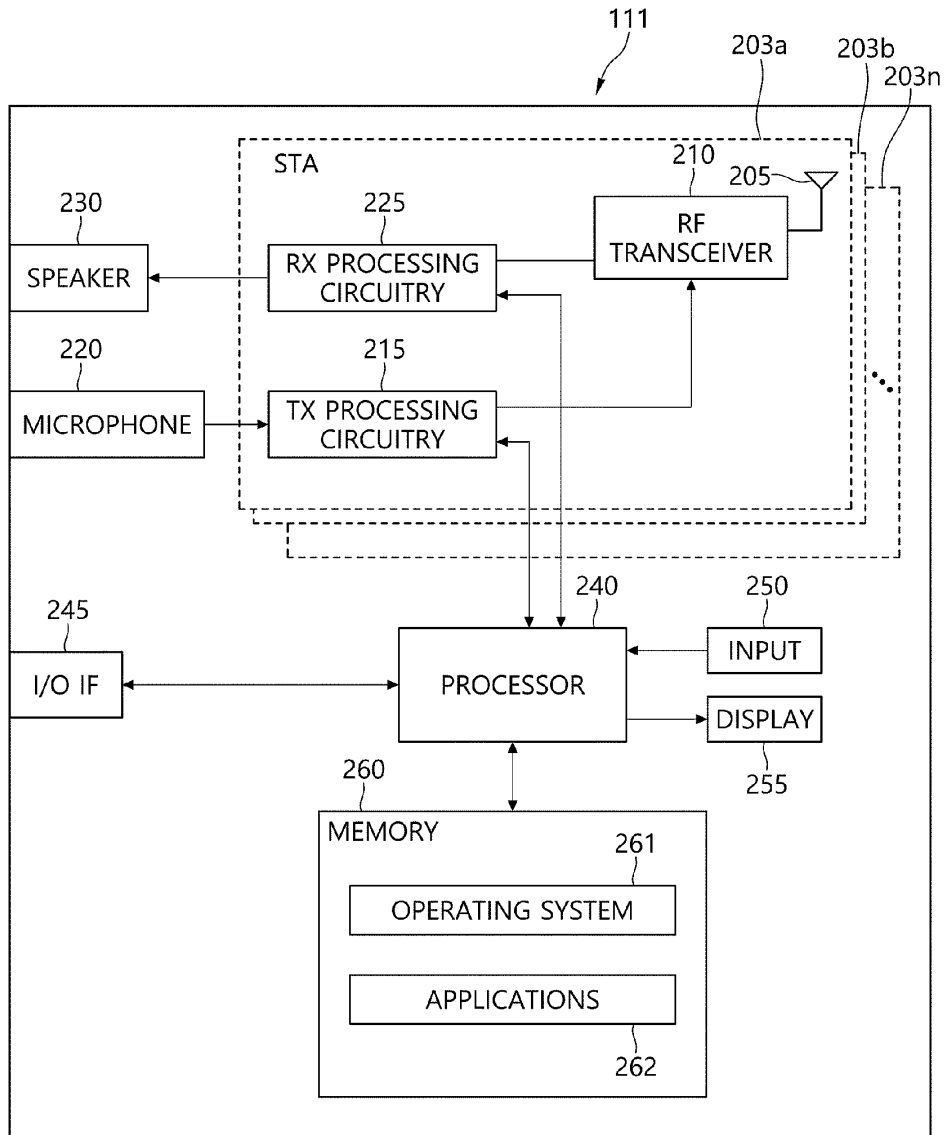


[Fig. 3]

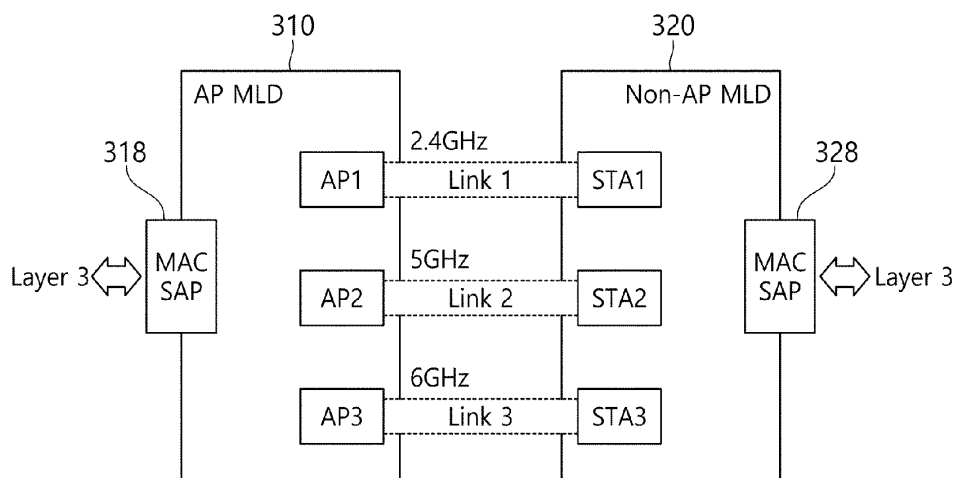


[Fig. 4]

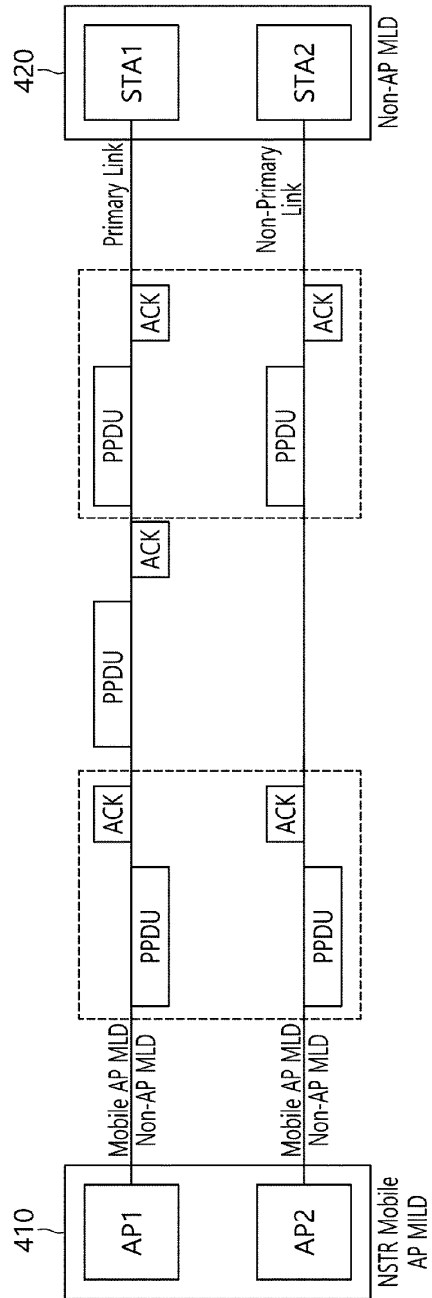

[Fig. 5]

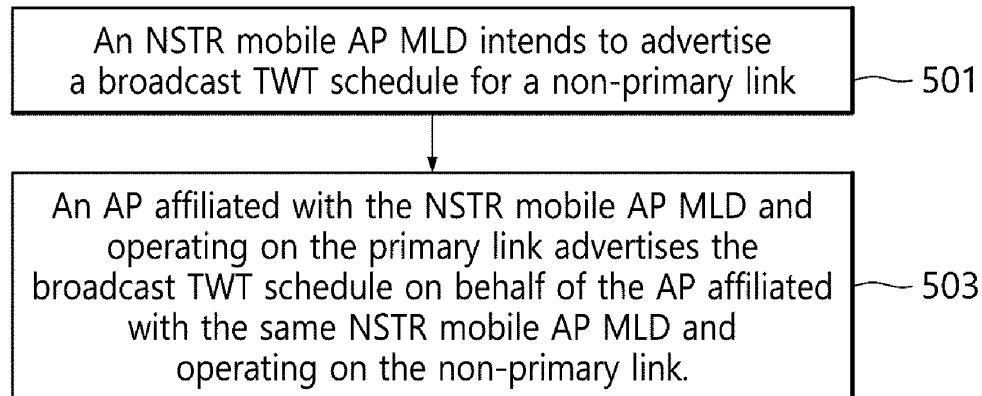500

[Fig. 6]

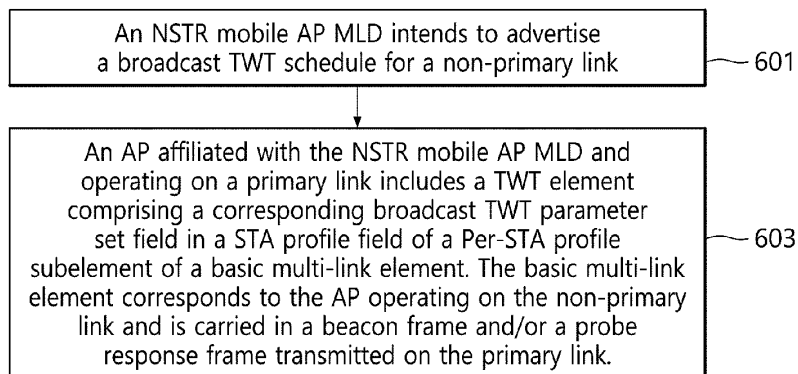600

700

NDP Paging Indicator	1
Responder PM Mode	1
Negotiation Type	2
WTW Information Frame Disabled	1
Wake Duration Unit	1
Link ID Bitmap Present	1
OBSS R-TWT	1

Bits

TWT Request Command	3
Trigger	1
Last Broadcast Parameter Set	1
Flow Type	1
Broadcast TWT Recommendation	3
TWT Wake Interval Exponent	5
Aligned	1

Bits:

Element ID	Length	Control	TWT Parameter Information
1	1	1	variable

Octets:

710

Request Type	2	Target Wake Time	2	Nominal Minimum TWT Wake Duration	1	TWT Wake Interval Mantissa	2	Broadcast TWT Info	2	Restricted TWT Traffic Info (optional)	0 or 3
--------------	---	------------------	---	-----------------------------------	---	----------------------------	---	--------------------	---	--	--------

Octets:


TWT Setup Command	3
Trigger	1
Last Broadcast Parameter Set	1
Flow Type	1
Broadcast TWT Recommendation	3
TWT Wake Interval Exponent	5
Aligned	1

Bits:

Restricted TWT Traffic Info Present	1	Restricted TWT Schedule Info	2	Broadcast TWT ID	5	Broadcast TWT Persistence	8
-------------------------------------	---	------------------------------	---	------------------	---	---------------------------	---


Bits:

[Fig. 8]

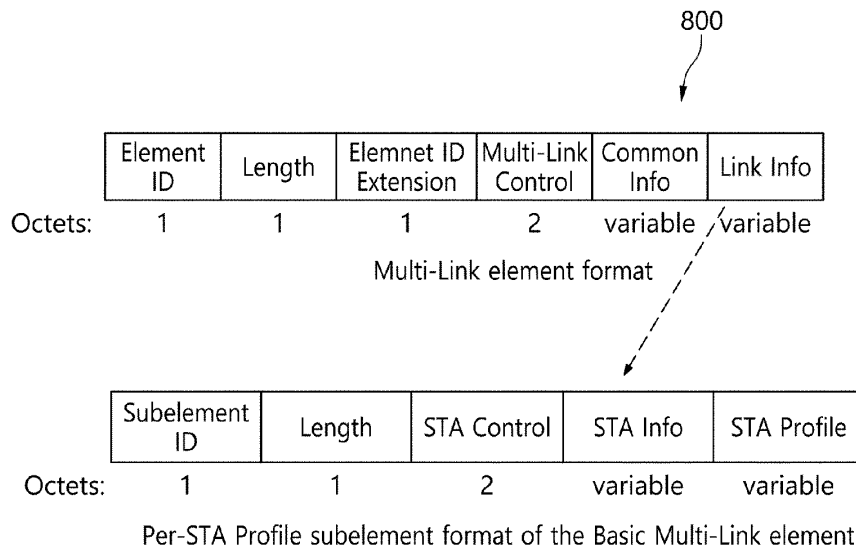


[Fig. 9]


900

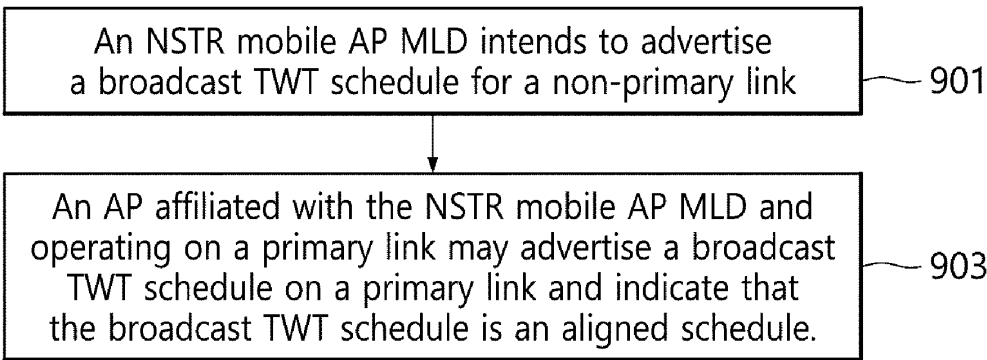


[Fig. 10]

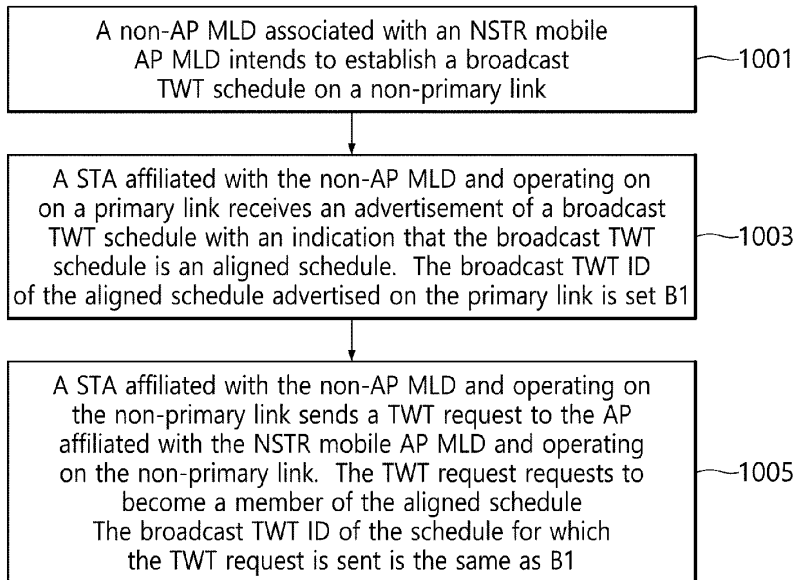1000

[Fig. 11]

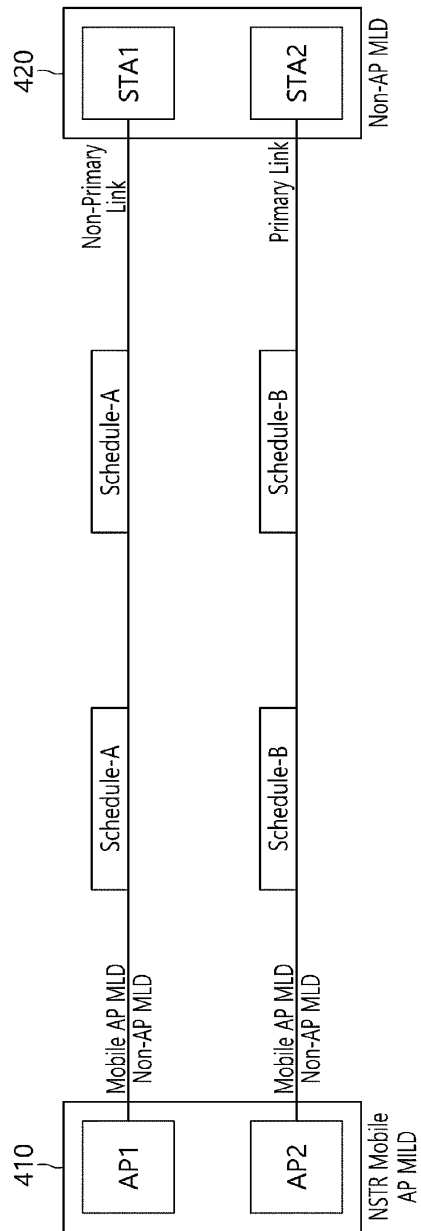

[Fig. 12]

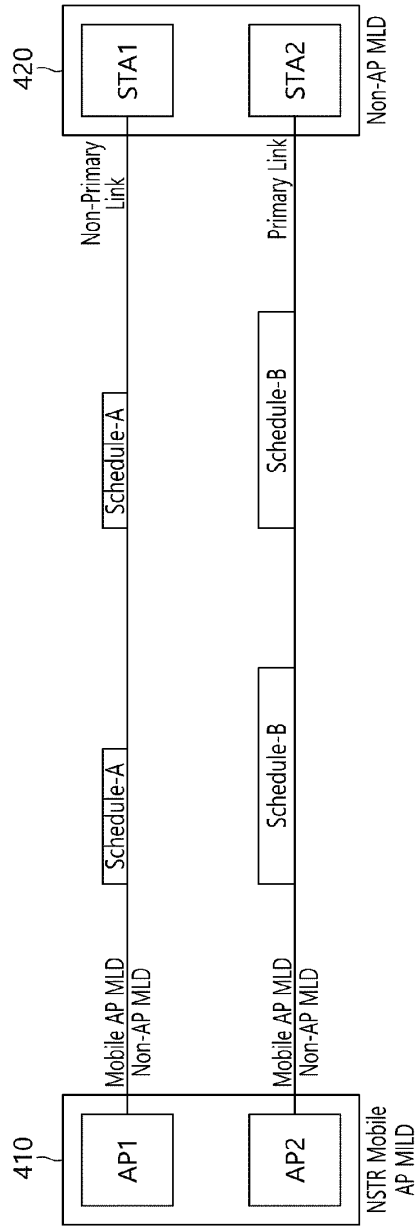

[Fig. 13]

1300