



- (51) **International Patent Classification:**
E21B 17/03 (2006.01) *E21B 19/18* (2006.01)
- (21) **International Application Number:**
PCT/US2013/063711
- (22) **International Filing Date:**
7 October 2013 (07.10.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 10200 Bellaire Boulevard, Houston, Texas 77072 (US).
- (72) **Inventor:** DIETZ, Wesley Paul; 2044 Robin Hill Lane, Carrollton, Texas 75007 (US).
- (74) **Agents:** KAISER, Iona N. et al.; McDermott Will & Emery LLP, 500 North Capitol Street, N.W., Washington, District of Columbia 20001 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

(54) **Title:** QUICK CONNECT FOR WELLBORE TUBULARS

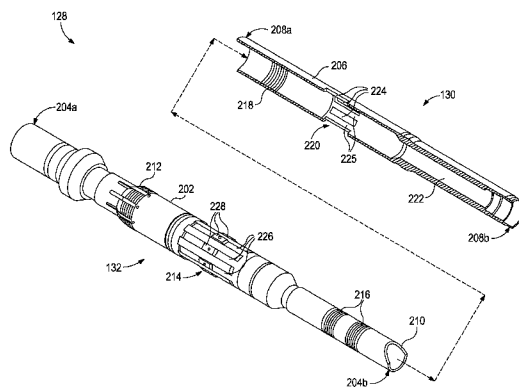


FIG. 2

(57) **Abstract:** Disclosed is a coupling assembly that includes an upper adapter having an upper adapter body providing a latching collet and a torque collet, the torque collet including a plurality of axially-extending torque members and a corresponding torque lug defined in each axially-extending torque member, and a lower adapter having a lower adapter body configured to receive the upper adapter body and providing a series of latch mating threads defined on an inner surface of the lower adapter body and a torque collet profile, the latch mating threads being configured to matingly engage the latching collet and the torque collet profile including one or more longitudinal slots defined in the lower adapter body and configured to receive the torque lugs therein, wherein, when the torque lugs are received into the longitudinal slots, torque may be applied between the upper and lower adapters in at least one angular direction.

