



(51) International Patent Classification:

H04M 3/00 (2006.01) *H04L* 12/70 (2013.01)
G06F 9/50 (2006.01) *H04M* 3/56 (2006.01)

(21) International Application Number:

PCT/JP2014/080989

(22) International Filing Date:

18 November 2014 (18.11.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2013-237616 18 November 2013 (18.11.2013) JP
 2014-206251 7 October 2014 (07.10.2014) JP

(71) Applicant (for all designated States except US): **RICOH COMPANY, LIMITED** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

(72) Inventor; and

(71) Applicant (for US only): **UMEHARA, Naoki** [JP/JP]; c/o RICOH COMPANY, LIMITED, 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

(74) Agent: **SAKAI, Hiroaki**; Sakai International Patent Office, Kasumigaseki Building, 2-5, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo, 1006020 (JP).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: SELECTING SYSTEM, COMMUNICATION MANAGEMENT SYSTEM, COMMUNICATION SYSTEM, COMPUTER PROGRAM, AND METHOD OF SELECTION

FIG.17

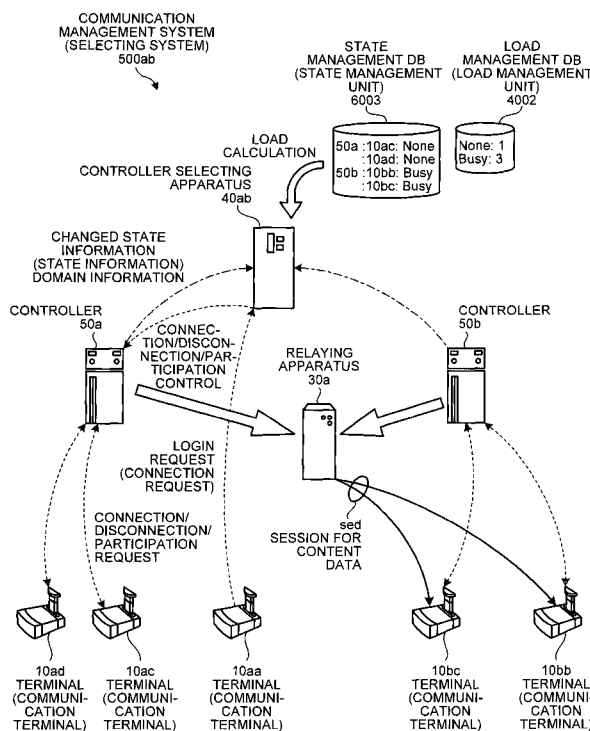

(57) Abstract: The selecting system includes a state management unit, a load management unit, an accepting unit, a calculating unit, and a selecting unit. The state management unit manages, for each controller, state information of communication of a terminal connected to the controller. The load management unit manages load information of each state of communication. The accepting unit accepts a connection request from a terminal. The calculating unit calculates, for each controller, the degree of load of the controller based on the state information and the load information. The selecting unit selects a controller to be connected to the terminal as a connection requester terminal based on the degree of load calculated.

WO 2015/072581 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*