

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 December 2009 (23.12.2009)

(10) International Publication Number
WO 2009/153543 A8

(51) International Patent Classification:

A61M 5/178 (2006.01) *A61J 1/20* (2006.01)
A61M 5/20 (2006.01)

(21) International Application Number:

PCT/GB2009/001448

(22) International Filing Date:

10 June 2009 (10.06.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0811346.6 19 June 2008 (19.06.2008) GB

(71) Applicant (for all designated States except US): **CILAG GMBH INTERNATIONAL** [CH/CH]; Landis+ Gyr-Strasse 1, CH-6300 Zug (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JENNINGS, Douglas, Ivan** [GB/GB]; PA Consulting Group, Cambridge Technology Centre, Melbourn, Hertfordshire SG8 6DP (GB).

(74) Agents: **BRUNNER, John, Michael, Owen** et al.; Carpmaels & Ransford, 43-45 Bloomsbury Square, London WC1A 2RA (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))


(48) Date of publication of this corrected version:

10 March 2011

(15) Information about Correction:

see Notice of 10 March 2011

(54) Title: REUSABLE AUTO- INJECTOR

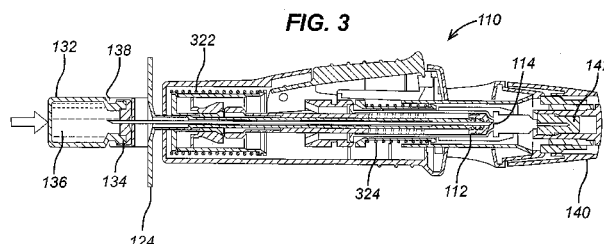

(57) Abstract: An injection device comprises a first sub-assembly. The first sub-assembly comprises a chamber (116) for holding a fluid. The chamber comprises an inner surface and an exit aperture (114). The first sub-assembly comprises a stopper (112) movably disposed within the chamber and having an outer surface substantially in contact with the inner surface about its perimeter. The first sub-assembly comprises an adapter (118) adapted to transfer fluid into the chamber.