



- (51) **International Patent Classification:** Not classified
- (21) **International Application Number:**
PCT/DK2011/050413
- (22) **International Filing Date:**
2 November 2011 (02.11.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
PA 2010 70470 2 November 2010 (02.11.2010) DK
PA 2011 70071 8 February 2011 (08.02.2011) DK
- (71) **Applicant (for all designated States except US):**
BLÜCHER METAL A/S [DK/DK]; Pugdalvej 1,
DK-7480 Vildbjerg (DK).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only): LOHMANN, Hans**
[DK/DK]; Wilstersvej 3, DK-4180 Sorø (DK).
- (74) **Agent: PATRADE A/S;** Fredens Torv 3A, DK-8000
Aarhus C (DK).
- (81) **Designated States (unless otherwise indicated, for every
kind of national protection available):** AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,


CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) **Designated States (unless otherwise indicated, for every
kind of regional protection available):** ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT,
LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS,
SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- without international search report and to be republished
upon receipt of that report (Rule 48.2(g))
- with information concerning incorporation by reference
of missing parts and/or elements (Rule 20.6)

(54) **Title:** DUCTWORK

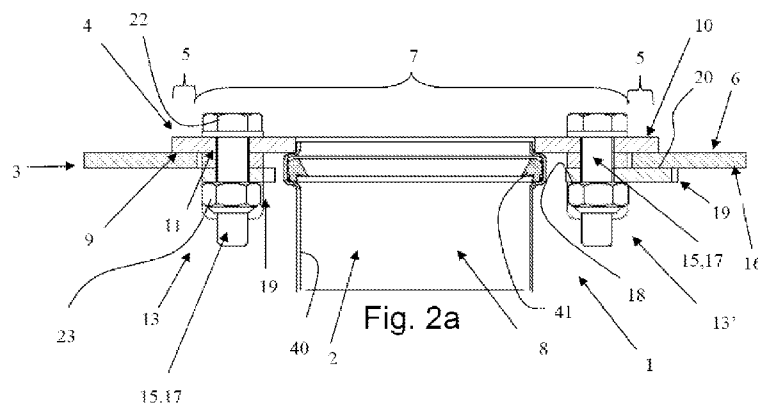

- (57) **Abstract:** Ductwork (1) for arranging at least one pipe through an opening (2) in a partitioning (3), including a flange (4) having an outer periphery area (5) and a central area (7) which is formed with a guide opening (8) for every pipe, the flange (4) being provided with a number of mounting apertures (11), the flange (4) having an inner side (9) and an outer side (10) opposite the inner side (9), where the inner side (9) is adapted for bearing against one side (6) of the partitioning, wherein the ductwork (1) further includes a connecting arrangement mounted in each mounting aperture (11), the connecting arrangement including force transmission means (15) with an operating member (22) disposed over the outer side (10) of the flange, and with a shank (17) extending through the mounting aperture (11), a clamping means (23) disposed on the shank (17) of the force transmission means (15) and which is displaceable around and/or along the shank (17) by actuating the operating member (22), and an engagement arrangement (19) disposed between the inner side (9) of the flange and the clamping means (23), and which is adapted with contact surfaces (23) interacting with contact surfaces (18) on the clamping means (23), and engaging faces (20) that may be displaced radially relative to the orientation of the shank by actuating the operating member (22).