



APPARATUS FOR, AND METHOD OF,
MAINTAINING A CLEAN WINDOW IN A LASER

TECHNICAL FIELD

This invention relates to apparatus for, and a
5 method of, maintaining a clean optical element in a laser.
The optical element may be a window or a mirror.

BACKGROUND

Lasers are used for many different applications.
The lasers are advantageous because they provide energy
10 radiation at a particular wavelength. This energy radiation
is advantageous because it can be produced with considerably
greater directionality than can be produced by sources of
other radiation. For example, lasers have been used
advantageously in a wide variety of different applications
15 including medical applications for providing focussed energy
of a high magnitude to fuse different elements in the eye such
as to repair detached retinues and torn retinues in a
patient's eye. Lasers have also been used in the manufacture
of integrated circuit chips. Lasers have also been used to
20 test the efficiency of splices of optical fibers.

Lasers may employ optical elements at opposite ends
of the cavity. The optical elements may constitute mirrors
or windows. When the optical elements constitute windows, a
mirror outside the window at one end generally reflects all
25 of the radiation and a mirror outside the window at the other
end reflects most of the radiation and passes some of the
radiation. Alternately, windows may be provided at the ends
of the cavity and the windows may be coated with a material
to make them partially or totally reflective. In this way,
30 the radiation produced in the cavity may be amplified in
successive reflections by the mirrors while a portion of the
radiation passes through one of the windows in each cycle of
such reflections. The radiation passing through such optical
element is used in applications such as described in the
35 previous paragraph.



Some types of lasers employ chemical elements which react when an electrical discharge is produced in the laser. For example, hydrogen and chlorine may be reacted to produce hydrogen chloride when an electrical discharge occurs in the laser, or krypton and fluorine may be reacted to produce krypton fluoride when the electrical discharge occurs. Such a chemical reaction causes a large amount of energy to be generated at a particular wavelength dependent upon the characteristics of the gases.

Lasers employing electrical discharges may have certain disadvantages. One disadvantage is that erosion of the electrodes can cause undesirable particles to be produced. These particles may be considered to constitute debris. The debris tends to migrate to the optical element and cloud the optical element. When the optical element becomes clouded, the efficiency in the operation of the laser becomes degraded.

A knowledge of the problem discussed in the previous paragraph has existed for some time. Attempts have been made in the prior art to resolve this problem. For example, gas from another source has been directed against and past the surface of the optical element to inhibit the debris from reaching the optical element. Such a system is disclosed in Japanese Kokoku patent No. Sho 60(1985)-26312, this patent having been filed as patent application Sho 52(1977)-75198. This approach has been partially effective in resolving the problem. However, sufficient amounts of debris still reach the optical element. The problem has become aggravated because ever increasing performance and lifetime standards are being established in the operation of lasers.

The inefficiencies in the operation of the apparatus discussed in the previous paragraph are primarily threefold:

1. The gas directed against and past the surface of the optical element such as the window may not be completely clean. This gas is typically passed through a filtering device to remove debris prior to being directed to the surface of the



optical element. However, ~~such filtering of debris~~ is often not completely effective in removing the debris. Since the gas is moving along the optical element, it tends to deposit debris on the optical element even as it is attempting to inhibit the migration of debris to the optical element. The rate of deposition of debris on the optical element can therefore actually be increased, rather than inhibited.


2. Filters used to clean the gas may produce gas which is electrically charged. When directed to the surface of the optical element, such charge may be transferred to the surface of the optical element. The charge on the optical element tends to attract and hold undesirable particles such as debris.

3. Some types of filters used to clean the gas may employ hot or cold trapping elements which can elevate or reduce the temperature of the gas being directed to the surface of the optical element such as the window. This difference in temperature can produce a stress in the optical element thereby modifying its optical properties and impeding the operating efficiency of the optical element.

The problems specified above have continued to exist even though they have been long recognized and considerable attempts have been made to overcome these problems.

BRIEF DESCRIPTION OF THE INVENTION

In one embodiment of the invention, a first gas in a laser cavity is ionized by an electrical discharge in the cavity as a step in producing an energy radiation. Debris (particulated) is produced during the formation of the energy radiation. The energy radiation and the debris move toward an optical element in the cavity. The optical element may be a window or a mirror. The debris tends to deposit everywhere in the cavity, including on the optical element, thereby



dirtying the optical element. This inhibits the efficiency in the operation of the laser.

A clean gas is directed into the cavity through a passage at a position displaced from the optical element. The
5 clean gas then passes in the cavity through an orifice further from the optical element than the passage. The flow of the first gas through the orifice creates a venturi effect on the clean gas to insure that the clean gas will move away from the optical element. In this way, the clean gas inhibits the
10 first gas and the debris from moving to the optical element.

Baffles in the cavity between the passage and the orifice provide irregularities in the movement of the first gas from the orifice to the optical element, thereby enhancing the inhibition against the movement of the debris to the
15 optical element. Baffles in the cavity between the passage and the optical element also inhibit the movement of any gas to the optical element. An electrically grounded screen in the displaced passage attracts any ions present in the clean gas.

20 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic diagram showing certain features of a laser well known in the art;

Figure 2 is a schematic diagram of a system known in the prior art for cleaning an optical element such as a
25 window or mirror in the laser system shown in Figure 1;

Figure 3 is a schematic diagram of one embodiment of this invention for cleaning an optical element such as a window or mirror in the laser system shown in Figure 1; and

Figure 4 is a schematic view of an anode and a
30 cathode and an electrical discharge between the anode and the cathode.

DETAILED DESCRIPTION

The laser system shown in Figures 1 and 4 is well known in the prior art. The system includes a laser discharge
35 housing 10 and optical elements 11 such as mirrors or windows



REPLACED

at opposite ends of a cavity in the housing. The optical elements 11 may be windows which pass energy such as light or mirrors which are coated to pass energy partially or fully. When the optical elements 11 constitute windows, mirrors may be disposed outside of the cavity to partially or fully reflect the energy. An electrical discharge 12 is produced between the optical elements 11 by a voltage pulse provided periodically between a cathode 13 and an anode 14 in Figure 4. The electrical discharge 12 schematically illustrated at 12 in Figures 1 and 4 may be produced upon the application of a voltage pulse between an anode 13 and the cathode 14.

A blower 18 may be disposed in the housing 10 to blow suitable gases 17 such as krypton and fluoride in a direction perpendicular to a figurative line between the optical elements 11. The gases 17 are shown as being disposed outside of the area of the electrical discharge 12 but it will be appreciated that the gases may also be disposed in the electrical discharge area. The gases 17 are ionized by the electrical discharge and react chemically to generate radiation at a particular wavelength such as in the excimer range. These gases are heated by this discharge. The heated gases are cooled by a heat exchanger 20 in the housing 10.

Debris is formed by the electrical discharge of the laser in the region 12 and by erosion of the electrodes. The debris may be in the form of particulates. The debris tends to migrate to the optical elements 11 and to cloud the optical elements. One optical element 11 can be considered as a mirror and window if it partially passes the radiation impinging on it and reflects the other portion of the radiation into the cavity.

The features described are disclosed in additional detail in U.S. Patent 4,959,840 issued on September 25, 1990, to Robert P. Akins, Donald G. Larson, Uday K Sengupta and Richard L. Sandstrom for "Compact Excimer Laser Including An Electrode Mounted in Insulating Relationship to Wall of Laser" and assigned of record to the assignee of record of this



REPLACED

6

application. The disclosure of U.S. Patent 4,959,840 is hereby incorporated herein by reference.

Figure 2 schematically illustrates a system known in the prior art for inhibiting the debris from moving to one of the optical elements 11. The system includes a shoulder 32 which is disposed in the housing 10 in contiguous relationship to the optical element 11. A finger 34 is disposed inwardly from the shoulder 32 in slightly spaced relationship to the optical element 11 to define a distribution manifold 31 and an orifice 36. Gas passing through a conduit 38 is accordingly forced to move into the manifold 31 and through the orifice 36 and is directed to the surface of the optical element or mirror 11. The gas then moves away from the optical element 11 through a channel 40.

If the gas moving through the conduit 38 were completely clean, the system shown in Figure 2 and described above might be advantageous. Unfortunately, the gas is never completely clean. Because of this, the system of the prior art is disadvantageous because it actually tends to dirty the optical element 11. This results from the fact that the debris is forced to move against and past the optical element 11. Because of this, some of this debris becomes deposited on the optical element 11.

The system shown in the prior art has another significant disadvantage. When filters are used to clean the gas moving through the orifice 38, the filter may produce an electrical charge in the gas. This charge may be transferred by the gas to the optical element 11, particularly since the gas moves against and past the optical element. The charge on the optical element tends to attract and hold debris. No attempt has been made in the prior art to eliminate such a charge or to prevent the debris from being attracted by such charge when such charge is transferred to the optical element 11.

Since the conduit 38 is relatively close to the optical element 11, the optical element tends to become




stressed by the heat generated when the filter is heated or cooled to enhance its ability to trap debris. The filter accordingly heats or cools the gas moving the filter. The heated or cooled gas in turn heats or cools the optical
5 element 11 as the gas moves against or past the optical element 11. The heating or cooling stresses the optical element 11 and distorts the optical properties of the optical element. This reduces the operating efficiency of the optical element 11.

10 This invention provides a system which overcomes the disadvantages discussed above. This system is shown in Figure 3. In one embodiment of the invention, apparatus generally indicated at 50 is provided for directing a gas into a channel
15 52 through a passage 54 which is displaced from an optical element 56 such as a window or mirror and which communicates with the channel. The passage 54 is disposed in a housing 58 which is provided with a shoulder 60 for receiving the optical element 56. The optical element 56 is preferably disposed snugly against the shoulder 60 in the housing 58. A tubular
20 member 61 may be provided at the interior of the housing 58 to define the channel 52.

Baffles 62 are provided in the channel 52. Some of the baffles 62 may be disposed between the passage 54 and an inwardly turned lip 64 which is disposed on the tubular member
25 61 and which is further displaced from the optical element 56 than the passage 54. The inwardly turned lip 64 defines an orifice 65. Other baffles 68 may be disposed between the passage 54 and the optical element 56. A screen 66 may be extended across the passage 54 and may be electrically
30 grounded. The baffles 62 and 68 and the screen 66 may be supported by the tubular member 61.

Clean gases flow through the passage 54 into the channel 52 and then flow through the channel in a direction away from the optical element 56. The flow of the gases
35 through the channel 52 in a direction away from the optical element 56 is facilitated by the venturi effect created by the



flow of the gases with the debris in the electrical discharge area corresponding to the area 12 in Figure 1. The venturi effect is created because the gases with the debris flows past the orifice 65 in Figure 3.

5 Since the passage 54 is displaced from the optical element 56, the gases flowing through the passage 54 do not contact the window. This prevents any dirt or debris in the gases from contacting the optical element 56 and dirtying the optical element. Furthermore, since the gas flow is in a
10 direction away from the optical element 56, it inhibits the movement of any debris or charged particles in the channel 52 from moving to the optical element. As the gases flow through the passage 54, they move past the screen 66. Any charged particles in the gas flow are attracted and removed
15 by the screen 66, particularly since the screen is grounded. The removal of the charged particles inhibits the optical element 56 from becoming charged.

 Since the gases flowing through the passage 54 are displaced from the optical element 56, any heating or cooling
20 of the gases does not contact the optical element 56 in the area where light contacts the optical element. This is true even though the screen 66 may be heated or cooled. Because of this, the optical element 56 does not become heated and accordingly does not become stressed. Since the optical
25 element 56 does not become stressed, the optical properties in the optical element are preserved.

 The baffles 62 are also instrumental in inhibiting the movement of debris to the optical element 56. The baffles 62 between the passage 54 and the orifice 65 create a
30 turbulence in the gas moving from the passage 54 through the channel 52 and in any gases moving with the debris toward the optical element 56. This turbulence inhibits the movement of the debris to the optical element 56. The baffles 68 between the passage 54 and the optical element 56 also produce a
35 turbulence in the gases flowing from the passage 54 and



thereby inhibit the movement of such gases to the optical element 56.

Although this invention has been disclosed and illustrated with reference to particular embodiments, the principles involved are susceptible for use in numerous other
5 embodiments which will be apparent to persons skilled in the art. The invention is, therefore, to be limited only as indicated by the scope of the appended claims.

C L A I M S

1. An apparatus comprising:
a laser,
a cavity for receiving radiation from the laser,
5 an optical element disposed at the end of the cavity
for receiving the radiation travelling through the cavity, and
means for directing gases through the cavity at a
position displaced from the optical element and in a direction
away from the optical element to inhibit any debris in the
10 cavity from moving to the optical element.

2. The apparatus of claim 1, including,
a baffle in the cavity for providing a turbulence
to the gases directed through the cavity in the direction away
from the optical element.

15 3. The apparatus of claim 1,
a screen disposed in the path of the gases for
received charged particles in such gases.

4. The apparatus of claim 3 wherein
the screen is grounded.

20 5. In combination,
a laser for providing an electrical discharge in a
first direction, the laser containing first gases producing
energy radiation at a particular wavelength as a result of the
electrical discharge, the electrical discharge producing
25 debris,

means for directing the electrical discharge from
the laser in a first direction,

means defining a cavity for containing the
electrical discharge,

30 means at the end of the cavity for receiving the
coherent radiation after the movement of the energy radiation
through the cavity in a second direction transverse to the
first direction,

means for providing second gases, and



means for directing the second gases through the cavity at a position displaced from the receiving means and in a direction opposite to the direction of movement of the energy radiation toward the receiving means to inhibit the
5 movement of the debris to the receiving means.

6. In a combination as set forth in claim 5 wherein

the directing means for the second gases includes a passage into the cavity and means defining an orifice in the
10 cavity for facilitating the flow of the gases through the cavity in the direction away from the receiving means.

7. In a combination as set forth in claim 6, means disposed relative to the passage in the cavity for receiving charged particles in the second gases to inhibit
15 the movement of the charged particles to the receiving means.

8. In a combination as set forth in claim 7, means defining a baffle arrangement in the cavity for enhancing the action of the second gases moving through the cavity in preventing debris from being lodged on the
20 receiving means.

9. An apparatus comprising a housing, means for providing an electrical discharge in the housing,
25 first gases in the housing for ionization and chemical reaction by the electrical discharge to obtain energy radiation,

an optical element in the housing, means displaced from the optical element for
30 directing a passage of second gases away from the optical element from a position displaced from the optical element to inhibit the movement of debris to the optical element, the second gases including charged particles, and

means disposed at a position displaced from the
35 optical element for receiving the charged particles in such



second gases to prevent such charged particles from reaching the optical element.

10. The apparatus of claim 9, wherein the last mentioned means defines a screen for
5 receiving the charged particles in the second gases.

11. The apparatus of claim 10, wherein the screen is grounded.

12. The apparatus of claim 11, further including means for producing a turbulence in the second gases
10 during the movement of the second gases away from the optical element to enhance the inhibition provided by the second gases against the movement of the debris to the optical element.

13. An apparatus comprising:
a housing,
15 means disposed in the housing for producing an electrical discharge,
first gases in the housing for ionization and chemical reaction by the electrical discharge to produce an energy radiation,
20 optical means disposed at one end of the housing for receiving at least a portion of the energy radiation, and
means disposed within the housing and supported by the housing for providing for the flow of second gases through the housing in a direction away from the optical means to
25 inhibit the flow of the debris within the housing toward the optical means.

14. The apparatus of claim 13,
means disposed within the housing and supported by the housing for producing a turbulence in the movement of the
30 second gases away from the optical means to inhibit the flow of the debris within the housing toward the window.

15. The apparatus of claim 14,



the means producing a turbulence in the flow of the second gases away from the optical means including baffles supported by the housing.

5 16. The apparatus of claim 14,
means supported by the housing and disposed within the housing for attracting any charged particles in the second gases before the movement of the second gases away from the optical means.

10 17. The apparatus of claim 16 wherein
the means attracting the ions constitutes a screen and wherein the screen is grounded to attract the ions.

15 18. Apparatus comprising:
means for defining a cavity,
means for providing an electrical discharge in the
cavity,

there being gases in the cavity for ionization by the electrical discharge and for chemical reaction to produce energy radiation,

20 there being in the cavity debris produced by the
electrical discharge,

optical means at one end of the cavity for receiving the energy radiation after the movement of the energy radiation through the cavity,

25 means defining a shoulder for receiving the optical
means in a contiguous relationship between the shoulder and the optical means, and

30 means displaced from the shoulder and the optical
means for directing second gases through the cavity in a direction away from the optical means to inhibit the movement
of the debris to the optical means.

19. Apparatus as set forth in claim 18, further including

35 means defining an orifice in the cavity at a position further displaced from the optical means than the
displaced means for receiving the second gases and for passing



the second gases through the orifice and for producing a venturi effect on the second gases during the flow of the second gases through the orifice to facilitate the flow of the second gases through the cavity in the direction away from the
5 optical means,

the means directing the second gases through the cavity including a passage for directing the second gases into the cavity at a position displaced from the optical means.

20. Apparatus as set forth in claim 21 wherein
10 means are disposed in the passage for attracting any charged particles in the second gases.

21. Apparatus as set forth in claim 21 wherein
the means attracting the charged particles includes a screen and wherein the screen is grounded to attract the
15 charged particles.

22. Apparatus as set forth in claim 19 wherein
means are disposed in the cavity between the passage and the orifice for providing a turbulence in the movement of the second gases between the passage and the orifice to
20 further inhibit the movement of the debris to the optical means.

23. Apparatus as set forth in claim 22 wherein
means are disposed between the passage and the optical means for inhibiting the movement of the second gases
25 and the debris to the optical means.

24. Apparatus as set forth in claim 21 wherein
a baffle is disposed in the cavity between the passage and the orifice to provide a turbulence in the movement of the second gases between the passage and the
30 orifice and thereby inhibit the movement of the debris to the optical means and wherein

a baffle is disposed in the cavity between the passage and the optical means to inhibit the movement of the debris and the second gases to the optical means.



25. A method of preventing an optical element in a laser from being dirtied by debris, including the steps of:
providing for a movement of coherent energy in a particular direction through a cavity toward the optical
5 element,

directing gases into the cavity at a position displaced from the optical element, and

providing for the flow of the gases in the cavity in a direction away from the optical element to inhibit any
10 movement of the debris to the optical element.

26. A method as set forth in claim 25 wherein the gases are directed into the cavity through a passage and wherein

the gases are directed through an orifice at a
15 position further displaced from the optical element than the passage to facilitate the flow of the gases in the direction away from the optical element.

27. A method as set forth in claim 26 wherein a screen is disposed in the path of the gases in the
20 cavity to remove any charged particles in the gases and wherein the screen is grounded to attract the charged particles.

28. A method as set forth in claim 28 wherein a baffle is disposed in the cavity to increase the
25 path of movement of the gases from the passage to the orifice and to inhibit the movement of the debris to the optical element.

29. A method of preventing an optical element in a laser from being dirtied by debris, including the steps of:
30 providing for a movement of energy radiation in a first direction through a cavity,
there being in the cavity debris produced during the production of the energy radiation in the cavity, and
passing gases through the cavity from a position
35 displaced from the optical element and in a direction away



THIS SHEET HAS BEEN
REPLACED

from the optical element to inhibit the movement of the debris to the optical element.

30. A method as set forth in claim 29 wherein
any charged particles in the gases are inhibited
5 from reaching the optical element.

31. A method as set forth in claim 30 wherein
the optical element is disposed relative to a
passage providing for the movement of the gases into the
cavity so as to inhibit the gases from moving past the optical
10 element.

32. A method as set forth in claim 31 wherein
an orifice is provided at a position further from
the optical element than the passage to produce a venturi
effect on the gases for insuring that the gases will move in
15 the cavity in a direction away from the optical element and
wherein

turbulence is created in the gases between the
passage and the orifice to further inhibit the movement of the
debris to the optical element.

This Sheet Has Been Replaced



This Sheet Has Been Replaced

- 1 / 1 -

FIG. 1 *PRIOR ART*

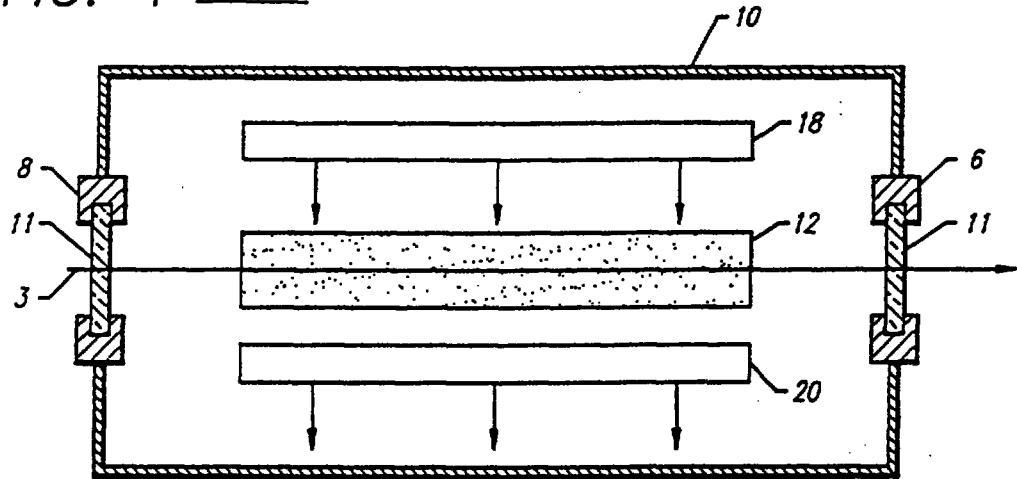


FIG. 4

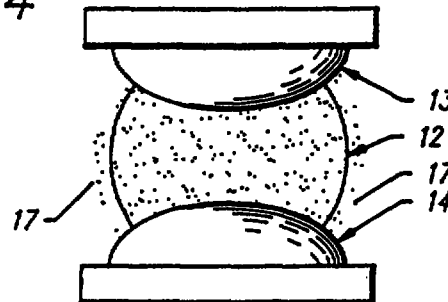


FIG. 3


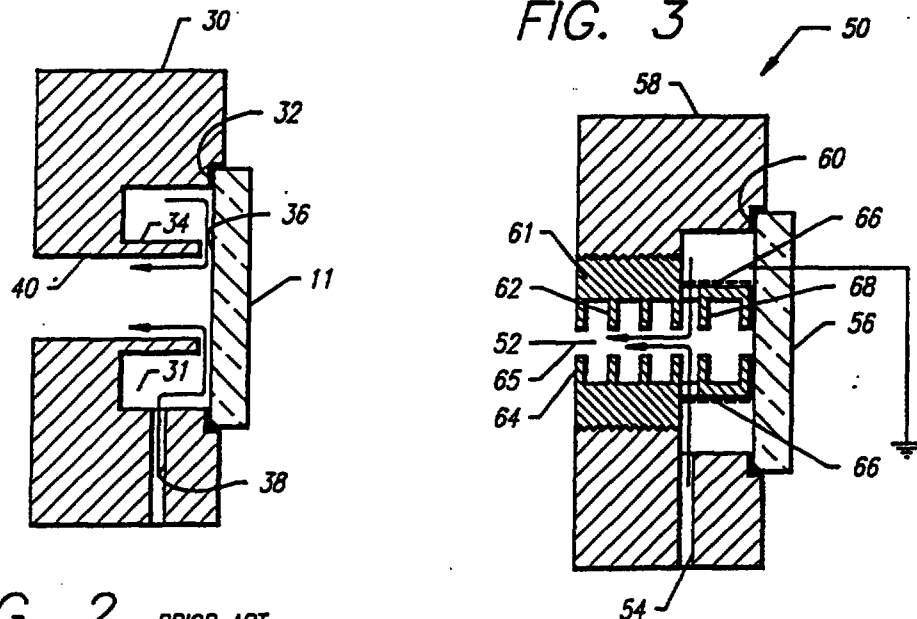


FIG. 2 *PRIOR ART*

SUBSTITUTE SHEET (RULE 26)



(54) Title: APPARATUS FOR, AND METHOD OF, MAINTAINING A CLEAN WINDOW IN A LASER

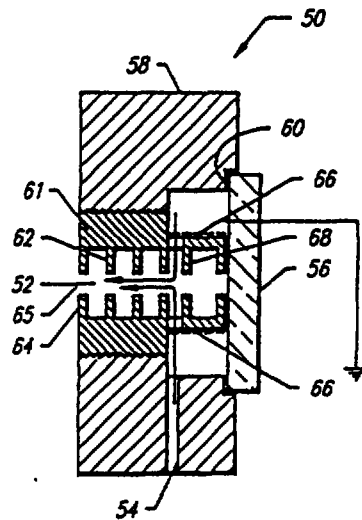

(57) Abstract

A first gas in a laser cavity is ionized by an electrical discharge in the cavity as a step in producing an energy radiation. Debris (particulates) is produced during the formation of the energy radiation. The radiation and the debris move toward an optical element in the cavity. The optical element may be a window or a mirror. The debris tends to deposit everywhere in the cavity, including on the optical element, thereby dirtying the optical element. This inhibits the efficiency in the laser operation. A clean gas is directed into the cavity through a passage (54) at a position displaced from the optical element (56). The clean gas then passes in the cavity through an orifice (65) further from the optical element than the passage. The flow of the first gas through the orifice creates a venturi effect on the clean gas to insure that the clean gas will move away from the optical element. In this way, the clean gas inhibits the first gas and the debris from moving to the optical element. Baffles (62) in the cavity between the passage and the orifice provide irregularities in the movement of the first gas from the orifice to the optical element, thereby further inhibiting the movement of the debris to the optical element. Baffles (68) in the cavity between the passage and the optical element also inhibit the movement of any gas to the optical element. An electrically grounded screen (66) in the displaced passage attracts any ions present in the clean gas.

REPLACEMENT SHEET

Date: 01 AUG 1996

Substitute sheet - 31/7/96

APPARATUS FOR, AND METHOD OF,
MAINTAINING A CLEAN WINDOW IN A LASER

TECHNICAL FIELD

This invention relates to apparatus for, and a
5 method of, maintaining a clean optical element in a laser.
The optical element may be a window or a mirror.

BACKGROUND

Lasers are used for many different applications.
The lasers are advantageous because they provide energy
10 radiation at a particular wavelength. This energy radiation
is advantageous because it can be produced with considerably
greater directionality than can be produced by sources of
other radiation. For example, lasers have been used
advantageously in a wide variety of different applications
15 including medical applications for providing focussed energy
of a high magnitude to fuse different elements in the eye such
as to repair detached retinues and torn retinues in a
patient's eye. Lasers have also been used in the manufacture
of integrated circuit chips. Lasers have also been used to
20 test the efficiency of splices of optical fibers.

Lasers may employ optical elements at opposite ends
of the cavity. The optical elements may constitute mirrors
or windows. When the optical elements constitute windows, a
mirror outside the window at one end generally reflects all
25 of the radiation and a mirror outside the window at the other
end reflects most of the radiation and passes some of the
radiation. Alternately, windows may be provided at the ends
of the cavity and the windows may be coated with a material
to make them partially or totally reflective. In this way,
30 the radiation produced in the cavity may be amplified in
successive reflections by the mirrors while a portion of the
radiation passes through one of the windows in each cycle of
such reflections. The radiation passing through such optical
element is used in applications such as described in the
35 previous paragraph.

REPLACEMENT SHEET

01 AUG 1996

Date

Substitute sheet - 31/7/96

2

Some types of lasers employ chemical elements which react when an electrical discharge is produced in the laser. For example, hydrogen and chlorine may be reacted to produce hydrogen chloride when an electrical discharge occurs in the laser, or krypton and fluorine may be reacted to produce krypton fluoride when the electrical discharge occurs. Such a chemical reaction causes a large amount of energy to be generated at a particular wavelength dependent upon the characteristics of the gases.

Lasers employing electrical discharges may have certain disadvantages. One disadvantage is that erosion of the electrodes can cause undesirable particles to be produced. These particles may be considered to constitute debris. The debris tends to migrate to the optical element and cloud the optical element. When the optical element becomes clouded, the efficiency in the operation of the laser becomes degraded.

A knowledge of the problem discussed in the previous paragraph has existed for some time. Attempts have been made in the prior art to resolve this problem. For example, gas from another source has been directed against and past the surface of the optical element to inhibit the debris from reaching the optical element. Such a system is disclosed in Japanese Kokoku patent No. Sho 60(1985)-26312, this patent having been filed as patent application Sho 52(1977)-75198. This approach has been partially effective in resolving the problem. However, sufficient amounts of debris still reach the optical element. The problem has become aggravated because ever increasing performance and lifetime standards are being established in the operation of lasers.

The inefficiencies in the operation of the apparatus discussed in the previous paragraph are primarily threefold:

1. The gas directed against and past the surface of the optical element such as the window may not be completely clean. This gas is typically passed through a filtering device to remove debris prior to being directed to the surface of the

REPLACEMENT SHEET

01 AUG 1996

Date

Substitute sheet - 31/7/96

optical element. However, such filtering of debris is often not completely effective in removing the debris. Since the gas is moving along the optical element, it tends to deposit debris on the optical element even as it is attempting to inhibit the migration of debris to the optical element. The rate of deposition of debris on the optical element can therefore actually be increased, rather than inhibited.

2. Filters used to clean the gas may produce gas which is electrically charged. When directed to the surface of the optical element, such charge may be transferred to the surface of the optical element. The charge on the optical element tends to attract and hold undesirable particles such as debris.

3. Some types of filters used to clean the gas may employ hot or cold trapping elements which can elevate or reduce the temperature of the gas being directed to the surface of the optical element such as the window. This difference in temperature can produce a stress in the optical element thereby modifying its optical properties and impeding the operating efficiency of the optical element.

The problems specified above have continued to exist even though they have been long recognized and considerable attempts have been made to overcome these problems.

BRIEF DESCRIPTION OF THE INVENTION

In one embodiment of the invention, a first gas in a laser cavity is ionized by an electrical discharge in the cavity as a step in producing an energy radiation. Debris (particulated) is produced during the formation of the energy radiation. The energy radiation and the debris move toward an optical element in the cavity. The optical element may be a window or a mirror. The debris tends to deposit everywhere in the cavity, including on the optical element, thereby

01 AUG 1996

Date

Substitute sheet - 31/7/96

4

dirtying the optical element. This inhibits the efficiency in the operation of the laser.

A clean gas is directed into the cavity through a passage at a position displaced from the optical element. The clean gas then passes in the cavity through an orifice further from the optical element than the passage. The flow of the first gas through the orifice creates a venturi effect on the clean gas to insure that the clean gas will move away from the optical element. In this way, the clean gas inhibits the first gas and the debris from moving to the optical element.

Baffles in the cavity between the passage and the orifice provide irregularities in the movement of the first gas from the orifice to the optical element, thereby enhancing the inhibition against the movement of the debris to the optical element. Baffles in the cavity between the passage and the optical element also inhibit the movement of any gas to the optical element. An electrically grounded screen in the displaced passage attracts any ions present in the clean gas.

20 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic diagram showing certain features of a laser well known in the art;

Figure 2 is a schematic diagram of a system known in the prior art for cleaning an optical element such as a window or mirror in the laser system shown in Figure 1;

Figure 3 is a schematic diagram of one embodiment of this invention for cleaning an optical element such as a window or mirror in the laser system shown in Figure 1; and

Figure 4 is a schematic view of an anode and a cathode and an electrical discharge between the anode and the cathode.

DETAILED DESCRIPTION

The laser system shown in Figures 1 and 4 is well known in the prior art. The system includes a laser discharge housing 10 and optical elements 11 such as mirrors or windows

at opposite ends of a cavity in the housing. The optical elements 11 may be windows which pass energy such as light or mirrors which are coated to pass energy partially or fully. When the optical elements 11 constitute windows, mirrors may
5 be disposed outside of the cavity to partially or fully reflect the energy. An electrical discharge 12 is produced between the optical elements 11 by a voltage pulse provided periodically between a cathode 13 and an anode 14 in Figure 4. The electrical discharge 12 schematically illustrated at
10 12 in Figures 1 and 4 may be produced upon the application of a voltage pulse between an anode 13 and the cathode 14.

A blower 18 may be disposed in the housing 10 to blow suitable gases 17 such as krypton and fluoride in a direction perpendicular to a figurative line between the
15 optical elements 11. The gases 17 are shown as being disposed outside of the area of the electrical discharge 12 but it will be appreciated that the gases may also be disposed in the electrical discharge area. The gases 17 are ionized by the electrical discharge and react chemically to generate
20 radiation at a particular wavelength such as in the excimer range. These gases are heated by this discharge. The heated gases are cooled by a heat exchanger 20 in the housing 10.

Debris is formed by the electrical discharge of the laser in the region 12 and by erosion of the electrodes. The
25 debris may be in the form of particulates. The debris tends to migrate to the optical elements 11 and to cloud the optical elements. One optical element 11 can be considered as a mirror and window if it partially passes the radiation impinging on it and reflects the other portion of the
30 radiation into the cavity.

The features described are disclosed in additional detail in U.S. Patent 4,959,840 issued on September 25, 1990, to Robert P. Akins, Donald G. Larson, Uday K Sengupta and Richard L. Sandstrom for "Compact Excimer Laser Including An
35 Electrode Mounted in Insulating Relationship to Wall of Laser" and assigned of record to the assignee of record of this

01 AUG 1996

Date :

Substitute sheet - 31/7/96

6

application. The disclosure of U.S. Patent 4,959,840 is hereby incorporated herein by reference.

Figure 2 schematically illustrates a system known in the prior art for inhibiting the debris from moving to one of the optical elements 11. The system includes a shoulder 32 which is disposed in the housing 10 in contiguous relationship to the optical element 11. A finger 34 is disposed inwardly from the shoulder 32 in slightly spaced relationship to the optical element 11 to define a distribution manifold 31 and an orifice 36. Gas passing through a conduit 38 is accordingly forced to move into the manifold 31 and through the orifice 36 and is directed to the surface of the optical element or mirror 11. The gas then moves away from the optical element 11 through a channel 40.

If the gas moving through the conduit 38 were completely clean, the system shown in Figure 2 and described above might be advantageous. Unfortunately, the gas is never completely clean. Because of this, the system of the prior art is disadvantageous because it actually tends to dirty the optical element 11. This results from the fact that the debris is forced to move against and past the optical element 11. Because of this, some of this debris becomes deposited on the optical element 11.

The system shown in the prior art has another significant disadvantage. When filters are used to clean the gas moving through the orifice 38, the filter may produce an electrical charge in the gas. This charge may be transferred by the gas to the optical element 11, particularly since the gas moves against and past the optical element. The charge on the optical element tends to attract and hold debris. No attempt has been made in the prior art to eliminate such a charge or to prevent the debris from being attracted by such charge when such charge is transferred to the optical element 11.

Since the conduit 38 is relatively close to the optical element 11, the optical element tends to become

REPLACEMENT SHEET

Date **01 AUG 1996**Substitute sheet - 31/7/96

stressed by the heat generated when the filter is heated or cooled to enhance its ability to trap debris. The filter accordingly heats or cools the gas moving the filter. The heated or cooled gas in turn heats or cools the optical
5 element 11 as the gas moves against or past the optical element 11. The heating or cooling stresses the optical element 11 and distorts the optical properties of the optical element. This reduces the operating efficiency of the optical element 11.

10 This invention provides a system which overcomes the disadvantages discussed above. This system is shown in Figure 3. In one embodiment of the invention, apparatus generally indicated at 50 is provided for directing a gas into a channel
15 element 56 such as a window or mirror and which communicates with the channel. The passage 54 is disposed in a housing 58 which is provided with a shoulder 60 for receiving the optical element 56. The optical element 56 is preferably disposed snugly against the shoulder 60 in the housing 58. A tubular
20 member 61 may be provided at the interior of the housing 58 to define the channel 52.

Baffles 62 are provided in the channel 52. Some of the baffles 62 may be disposed between the passage 54 and an inwardly turned lip 64 which is disposed on the tubular member
25 61 and which is further displaced from the optical element 56 than the passage 54. The inwardly turned lip 64 defines an orifice 65. Other baffles 68 may be disposed between the passage 54 and the optical element 56. A screen 66 may be extended across the passage 54 and may be electrically
30 grounded. The baffles 62 and 68 and the screen 66 may be supported by the tubular member 61.

Clean gases flow through the passage 54 into the channel 52 and then flow through the channel in a direction away from the optical element 56. The flow of the gases
35 through the channel 52 in a direction away from the optical element 56 is facilitated by the venturi effect created by the

01 AUG 1996

Date

Substitute sheet - 31/7/96

8

flow of the gases with the debris in the electrical discharge area corresponding to the area 12 in Figure 1. The venturi effect is created because the gases with the debris flows past the orifice 65 in Figure 3.

5 Since the passage 54 is displaced from the optical element 56, the gases flowing through the passage 54 do not contact the window. This prevents any dirt or debris in the gases from contacting the optical element 56 and dirtying the optical element. Furthermore, since the gas flow is in a
10 direction away from the optical element 56, it inhibits the movement of any debris or charged particles in the channel 52 from moving to the optical element. As the gases flow through the passage 54, they move past the screen 66. Any charged particles in the gas flow are attracted and removed
15 by the screen 66, particularly since the screen is grounded. The removal of the charged particles inhibits the optical element 56 from becoming charged.

 Since the gases flowing through the passage 54 are displaced from the optical element 56, any heating or cooling
20 of the gases does not contact the optical element 56 in the area where light contacts the optical element. This is true even though the screen 66 may be heated or cooled. Because of this, the optical element 56 does not become heated and accordingly does not become stressed. Since the optical
25 element 56 does not become stressed, the optical properties in the optical element are preserved.

 The baffles 62 are also instrumental in inhibiting the movement of debris to the optical element 56. The baffles 62 between the passage 54 and the orifice 65 create a
30 turbulence in the gas moving from the passage 54 through the channel 52 and in any gases moving with the debris toward the optical element 56. This turbulence inhibits the movement of the debris to the optical element 56. The baffles 68 between the passage 54 and the optical element 56 also produce a
35 turbulence in the gases flowing from the passage 54 and



Substitute sheet - 31/7/96

9

thereby inhibit the movement of such gases to the optical element 56.

Although this invention has been disclosed and illustrated with reference to particular embodiments, the principles involved are susceptible for use in numerous other
5 embodiments which will be apparent to persons skilled in the art. The invention is, therefore, to be limited only as indicated by the scope of the appended claims.



REPLACEMENT SHEET

01 AUG 1996

Date

10

THIS SHEET HAS BEEN
REPLACED

Substitute sheet - 31/7/96

C L A I M S

This Sheet Has Been Replaced



1. An apparatus comprising:
 - a laser,
 - a cavity for receiving radiation from the laser,
 - 5 an optical element disposed at the end of the cavity for receiving the radiation travelling through the cavity, and
 - means for directing gases through the cavity at a position displaced from the optical element and in a direction away from the optical element to inhibit any debris in the
 - 10 cavity from moving to the optical element.
2. The apparatus of claim 1, including,
 - a baffle in the cavity for providing a turbulence to the gases directed through the cavity in the direction away from the optical element.
- 15 3. The apparatus of claim 1,
 - a screen disposed in the path of the gases for received charged particles in such gases.
4. The apparatus of claim 3 wherein the screen is grounded.
- 20 5. In combination,
 - a laser for providing an electrical discharge in a first direction, the laser containing first gases producing energy radiation at a particular wavelength as a result of the electrical discharge, the electrical discharge producing
 - 25 debris,
 - means for directing the electrical discharge from the laser in a first direction,
 - means defining a cavity for containing the electrical discharge,
 - 30 means at the end of the cavity for receiving the coherent radiation after the movement of the energy radiation through the cavity in a second direction transverse to the first direction,
 - means for providing second gases, and



REPLACEMENT SHEET

Date 01 AUG 1996

THIS SHEET HAS BEEN
REPLACED

Substitute sheet - 31/7/96

means for directing the second gases through the cavity at a position displaced from the receiving means and in a direction opposite to the direction of movement of the energy radiation toward the receiving means to inhibit the
5 movement of the debris to the receiving means.

6. In a combination as set forth in claim 5 wherein
the directing means for the second gases includes a passage into the cavity and means defining an orifice in the
10 cavity for facilitating the flow of the gases through the cavity in the direction away from the receiving means.

7. In a combination as set forth in claim 6, means disposed relative to the passage in the cavity for receiving charged particles in the second gases to inhibit
15 the movement of the charged particles to the receiving means.

8. In a combination as set forth in claim 7, means defining a baffle arrangement in the cavity for enhancing the action of the second gases moving through the cavity in preventing debris from being lodged on the
20 receiving means.

9. An apparatus comprising
a housing,
means for providing an electrical discharge in the housing,
25 first gases in the housing for ionization and chemical reaction by the electrical discharge to obtain energy radiation,
an optical element in the housing,
means displaced from the optical element for
30 directing a passage of second gases away from the optical element from a position displaced from the optical element to inhibit the movement of debris to the optical element, the second gases including charged particles, and
means disposed at a position displaced from the
35 optical element for receiving the charged particles in such

This Sheet Has Been Replaced





REPLACEMENT SHEET

01 AUG 1996

Date

THIS SHEET HAS BEEN
REPLACED

Substitute sheet - 31/7/96

12

second gases to prevent such charged particles from reaching the optical element.

10. The apparatus of claim 9, wherein
the last mentioned means defines a screen for
5 receiving the charged particles in the second gases.

11. The apparatus of claim 10, wherein
the screen is grounded.

12. The apparatus of claim 11, further including
means for producing a turbulence in the second gases
10 during the movement of the second gases away from the optical
element to enhance the inhibition provided by the second gases
against the movement of the debris to the optical element.

13. An apparatus comprising:
a housing,
15 means disposed in the housing for producing an
electrical discharge,
first gases in the housing for ionization and
chemical reaction by the electrical discharge to produce an
energy radiation,
20 optical means disposed at one end of the housing for
receiving at least a portion of the energy radiation, and
means disposed within the housing and supported by
the housing for providing for the flow of second gases through
the housing in a direction away from the optical means to
25 inhibit the flow of the debris within the housing toward the
optical means.

14. The apparatus of claim 13,
means disposed within the housing and supported by
the housing for producing a turbulence in the movement of the
30 second gases away from the optical means to inhibit the flow
of the debris within the housing toward the window.

15. The apparatus of claim 14,

This Sheet Has Been Replaced





REPLACEMENT SHEET
01 AUG 1996
Date

THIS SHEET HAS BEEN
REPLACED

Substitute sheet - 31/7/96

13

the means producing a turbulence in the flow of the second gases away from the optical means including baffles supported by the housing.

5 16. The apparatus of claim 14,
 means supported by the housing and disposed within the housing for attracting any charged particles in the second gases before the movement of the second gases away from the optical means.

10 17. The apparatus of claim 16 wherein
 the means attracting the ions constitutes a screen and wherein the screen is grounded to attract the ions.

15 18. Apparatus comprising:
 means for defining a cavity,
 means for providing an electrical discharge in the
 cavity,

 there being gases in the cavity for ionization by the electrical discharge and for chemical reaction to produce energy radiation,

20 there being in the cavity debris produced by the
 electrical discharge,

 optical means at one end of the cavity for receiving the energy radiation after the movement of the energy radiation through the cavity,

25 means defining a shoulder for receiving the optical
 means in a contiguous relationship between the shoulder and the optical means, and

30 means displaced from the shoulder and the optical
 means for directing second gases through the cavity in a direction away from the optical means to inhibit the movement
 of the debris to the optical means.

19. Apparatus as set forth in claim 18, further including

35 means defining an orifice in the cavity at a position further displaced from the optical means than the
 displaced means for receiving the second gases and for passing

This Sheet Has Been Replaced





REPLACEMENT SHEET

1 AUG 1996
Date :THIS SHEET HAS BEEN
REPLACED

Substitute sheet - 31/7/96

14

the second gases through the orifice and for producing a venturi effect on the second gases during the flow of the second gases through the orifice to facilitate the flow of the second gases through the cavity in the direction away from the

5 optical means,

the means directing the second gases through the cavity including a passage for directing the second gases into the cavity at a position displaced from the optical means.

20. Apparatus as set forth in claim 21 wherein

10 means are disposed in the passage for attracting any charged particles in the second gases.

21. Apparatus as set forth in claim 21 wherein

the means attracting the charged particles includes a screen and wherein the screen is grounded to attract the

15 charged particles.

22. Apparatus as set forth in claim 19 wherein

means are disposed in the cavity between the passage and the orifice for providing a turbulence in the movement of the second gases between the passage and the orifice to

20 further inhibit the movement of the debris to the optical means.

23. Apparatus as set forth in claim 22 wherein

means are disposed between the passage and the optical means for inhibiting the movement of the second gases

25 and the debris to the optical means.

24. Apparatus as set forth in claim 21 wherein

a baffle is disposed in the cavity between the passage and the orifice to provide a turbulence in the movement of the second gases between the passage and the

30 orifice and thereby inhibit the movement of the debris to the optical means and wherein

a baffle is disposed in the cavity between the passage and the optical means to inhibit the movement of the debris and the second gases to the optical means.

This Sheet Has Been Replaced





REPLACEMENT SHEET

01 AUG 1996

Date :

THIS SHEET HAS BEEN
REPLACED

Substitute sheet - 31/7/96

15

THIS SHEET HAS BEEN
REPLACED

25. A method of preventing an optical element in
a laser from being dirtied by debris, including the steps of:
providing for a movement of coherent energy in a
particular direction through a cavity toward the optical
5 element,
directing gases into the cavity at a position
displaced from the optical element, and
providing for the flow of the gases in the cavity
in a direction away from the optical element to inhibit any
10 movement of the debris to the optical element.

26. A method as set forth in claim 25 wherein
the gases are directed into the cavity through a
passage and wherein
the gases are directed through an orifice at a
15 position further displaced from the optical element than the
passage to facilitate the flow of the gases in the direction
away from the optical element.

27. A method as set forth in claim 26 wherein
a screen is disposed in the path of the gases in the
20 cavity to remove any charged particles in the gases and
wherein the screen is grounded to attract the charged
particles.

28. A method as set forth in claim 28 wherein
a baffle is disposed in the cavity to increase the
25 path of movement of the gases from the passage to the orifice
and to inhibit the movement of the debris to the optical
element.

29. A method of preventing an optical element in
a laser from being dirtied by debris, including the steps of:
30 providing for a movement of energy radiation in a
first direction through a cavity,
there being in the cavity debris produced during the
production of the energy radiation in the cavity, and
passing gases through the cavity from a position
35 displaced from the optical element and in a direction away

This Sheet Has Been Replaced





REPLACEMENT SHEET
Date 01 AUG 1996

THIS SHEET HAS BEEN
REPLACED

Substitute sheet - 31/7/96

16

from the optical element to inhibit the movement of the debris to the optical element.

30. A method as set forth in claim 29 wherein
any charged particles in the gases are inhibited
5 from reaching the optical element.

31. A method as set forth in claim 30 wherein
the optical element is disposed relative to a
passage providing for the movement of the gases into the
cavity so as to inhibit the gases from moving past the optical
10 element.

32. A method as set forth in claim 31 wherein
an orifice is provided at a position further from
the optical element than the passage to produce a venturi
effect on the gases for insuring that the gases will move in
15 the cavity in a direction away from the optical element and
wherein

turbulence is created in the gases between the
passage and the orifice to further inhibit the movement of the
debris to the optical element.

This Sheet Has Been Replaced



FIG. 1 PRIOR ART

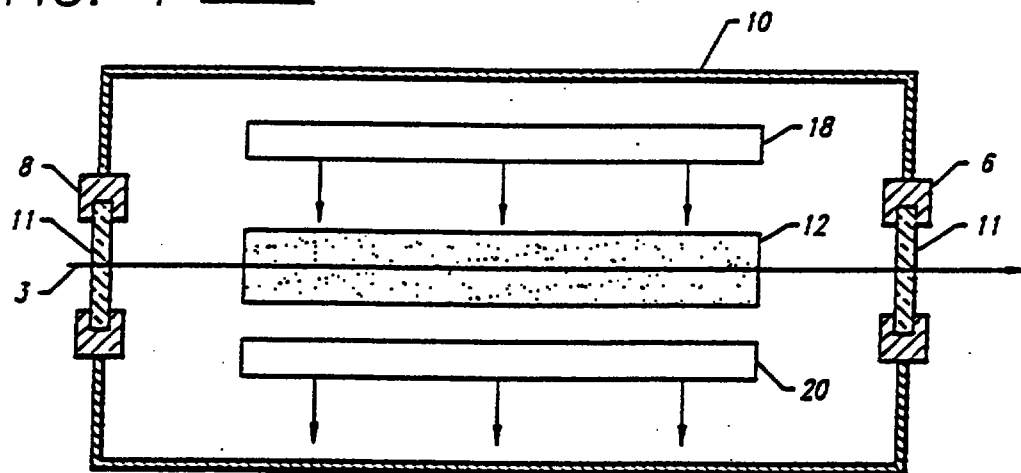


FIG. 4

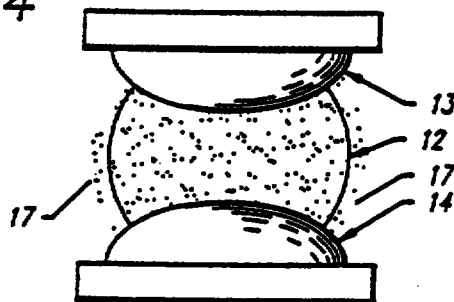


FIG. 3



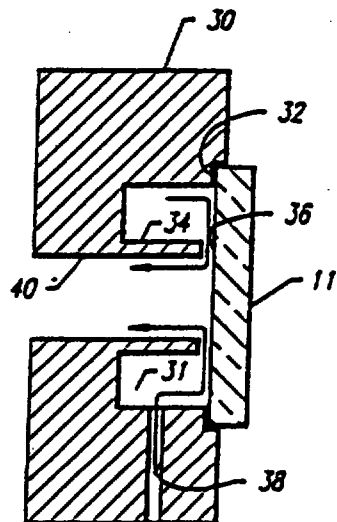


FIG. 2 PRIOR ART

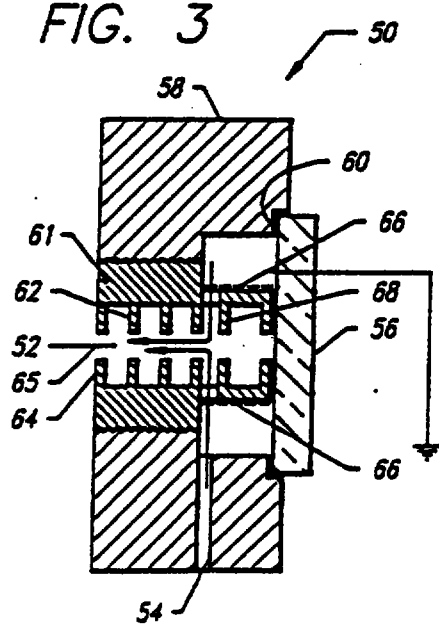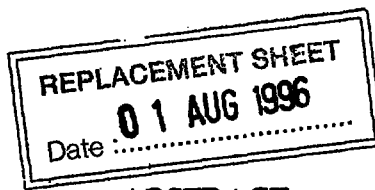

Substitute sheet - 31/7/96

ABSTRACT

APPARATUS FOR, AND METHOD OF, MAINTAINING A CLEAN WINDOW IN A LASER

A first gas in a laser cavity is ionized by an electrical discharge in the cavity as a step in producing an energy radiation. Debris <particulates> is produced during the formation of the energy radiation. The radiation and the debris move toward an optical element in the cavity. The optical element may be a window or a mirror. The debris tends to deposit everywhere in the cavity, including on the optical element, thereby dirtying the optical element. This inhibits the efficiency in the laser operation. A clean gas is directed into the cavity through a passage(54) at a position displaced from the optical element (56). The clean gas then passes in the cavity through an orifice (65) further from the optical element than the passage. The flow of the first gas through the orifice creates a venturi effect on the clean gas to ensure that the clean gas will move away from the optical element. In this way, the clean gas inhibits the first gas and the debris from moving to the optical element. Baffles (62) in the cavity between the passage and the orifice provide irregularities in the movement of the first gas from the orifice to the optical element, thereby further inhibiting the movement of the debris to the optical element. Baffles (68) in the cavity between the passage and the optical element also inhibit the movement of any gas to the optical element. An electrically grounded screen (66) in the displaced passage attracts any ions present in the clean gas.

(Figure 3)



REPLACEMENT SHEET

Date 25 NOV 1997

10

1. An apparatus comprising:

a laser,

5 a cavity for receiving from the laser energy radiation and debris travelling in a first direction,

an optical element disposed at the end of the cavity for receiving the radiation and debris travelling through the cavity in the first direction,

10 means for directing gases through the cavity at a position displaced from the optical element and in a direction away from the optical element and opposite to the first direction to inhibit the debris in the cavity from moving to the optical element, and

15 means disposed in the cavity for enhancing the action of the gases, during the flow of the gases in the cavity in the direction opposite to the first direction, in inhibiting the debris in the cavity from moving in the cavity to the optical element.

2. An apparatus comprising:


20 a laser,

a cavity for receiving from the laser energy radiation and debris travelling in a first direction,

25 an optical element disposed at the end of the cavity for receiving the radiation and debris travelling through the cavity in the first direction,

30 means for directing gases through the cavity at a position displaced from the optical element and in a direction away from the optical element and opposite to the first direction to inhibit the debris in the cavity from moving to the optical element, and


a baffle in the cavity for providing a turbulence to the gases directed through the cavity in the direction away

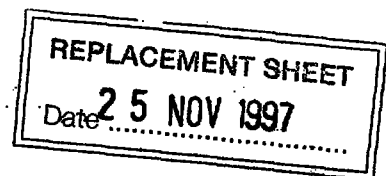

11

from the optical element and opposite to the direction of movement of the radiation and debris toward the optical element.

- 5 3. An apparatus comprising:
 a laser,
 a cavity for receiving radiation from the laser,
 an optical element disposed at the end of the cavity
 for receiving the radiation travelling through the cavity, and
 means for directing gases through the cavity at a
10 position displaced from the optical element and in a direction
 away from the optical element to inhibit any debris in the
 cavity from moving to the optical element,
 a screen disposed in the path of the gases for
 receiving charged particles in such gases.
- 15 4. The apparatus as set forth in claim 3 wherein
 the screen is grounded.
5. In combination,
 a laser for providing an electrical discharge in a
 first direction, the laser containing first gases producing
20 energy radiation at a particular wavelength as a result of the
 electrical discharge, the electrical discharge producing
 debris,
 means for directing the electrical discharge from
 the laser in a first direction,
25 means defining a cavity for containing the
 electrical discharge,
 means at the end of the cavity for receiving the
 energy radiation after the movement of the energy radiation
 through the cavity in a second direction transverse to the
30 first direction,
 means for providing second gases, and
 means for directing the second gases through the
 cavity at a position displaced from the receiving means and
 in a direction opposite to the direction of movement of the
35 energy radiation toward the receiving means to inhibit the
 movement of the debris to the receiving means.

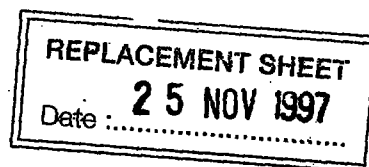

12

6. In a combination as set forth in claim 5 wherein

the directing means for the second gases includes a passage into the cavity and means defining an orifice in the cavity for facilitating the flow of the gases through the cavity in the direction away from the receiving means.

7. In a combination as set forth in claim 6, means disposed relative to the passage in the cavity for receiving charged particles in the second gases to inhibit the movement of the charged particles to the receiving means.

8. In a combination as set forth in claim 7, means defining a baffle arrangement in the cavity for enhancing the action of the second gases moving through the cavity in preventing debris from being lodged on the receiving means.

9. An apparatus comprising:
a housing,
means for providing an electrical discharge in the housing,
first gases in the housing for ionization and chemical reaction by the electrical discharge to obtain energy radiation,
an optical element in the housing,
means displaced from the optical element for directing a passage of second gases away from the optical element from a position displaced from the optical element to inhibit the movement of debris to the optical element, the second gases including charged particles, and
means disposed at a position displaced from the optical element for receiving the charged particles in such second gases to prevent such charged particles from reaching the optical element.

10. The apparatus of claim 9, wherein the last mentioned means defines a screen for receiving the charged particles in the second gases.



13

11. The apparatus of claim 10, wherein the screen is grounded.


12. The apparatus of claim 11, further including means for producing a turbulence in the second gases
5 during the movement of the second gases away from the optical element to enhance the inhibition provided by the second gases against the movement of the debris to the optical element.

13. An apparatus comprising:
a housing,
10 means disposed in the housing for producing an electrical discharge,
first gases in the housing for ionization and chemical reaction by the electrical discharge to produce an energy radiation,
15 optical means disposed at one end of the housing for receiving at least a portion of the energy radiation, and
means disposed within the housing and supported by the housing for providing for the flow of second gases through the housing in a direction away from the optical means to
20 inhibit the flow of debris within the housing toward the optical means.

14. The apparatus of claim 13, including means disposed within the housing and supported by the housing for producing a turbulence in the movement of the
25 second gases away from the optical means to inhibit the flow of the debris within the housing toward the optical means.

15. The apparatus of claim 14, wherein the means producing a turbulence in the flow of the second gases away from the optical means including baffles
30 supported by the housing.

16. The apparatus of claim 14, including means supported by the housing and disposed within the housing for attracting any charged particles in the second

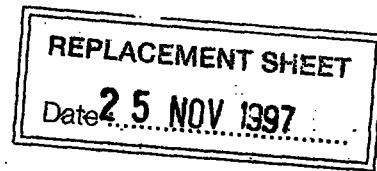

14

gases before the movement of the second gases away from the optical means.

17. The apparatus of claim 16 wherein
the means attracting the charged particles
5 constitutes a screen and wherein the screen is grounded to
attract the charged particles.

18. Apparatus comprising:
means for defining a cavity,
means for providing an electrical discharge in the
10 cavity,

there being gases in the cavity for ionization by
the electrical discharge and for chemical reaction to produce
energy radiation,

there being in the cavity debris produced by the
15 electrical discharge,

optical means at one end of the cavity for receiving
the energy radiation after the movement of the energy
radiation through the cavity,

means defining a shoulder for receiving the optical
20 means in a contiguous relationship between the shoulder and
the optical means, and

means displaced from the shoulder and the optical
means for directing second gases through the cavity in a
direction away from the optical means to inhibit the movement
25 of the debris to the optical means.

19. Apparatus as set forth in claim 18, further
including

means defining an orifice in the cavity at a
position further displaced from the optical means than the
30 displaced means for receiving the second gases and for passing
the second gases through the orifice and for producing a
venturi effect on the second gases during the flow of the
second gases through the orifice to facilitate the flow of the
second gases through the cavity in the direction away from the
35 optical means,



the means directing the second gases through the cavity including a passage for directing the second gases into the cavity at a position displaced from the optical means.

5 20. Apparatus as set forth in claim 19 wherein means are disposed in the cavity for attracting any charged particles in the second gases.

10 21. Apparatus as set forth in claim 20 wherein the means attracting the charged particles includes a screen and wherein the screen is grounded to attract the charged particles.


15 22. Apparatus as set forth in claim 19 wherein means are disposed in the cavity between the passage and the orifice for providing a turbulence in the movement of the second gases between the passage and the orifice to further inhibit the movement of the debris to the optical means.

20 23. Apparatus as set forth in claim 22 wherein means are disposed between the passage and the optical means for inhibiting the movement of the second gases and the debris to the optical means.

25 24. Apparatus as set forth in claim 21 wherein a baffle is disposed in the cavity between the passage and the orifice to provide a turbulence in the movement of the second gases between the passage and the orifice and thereby inhibit the movement of the debris to the optical means and wherein

a baffle is disposed in the cavity between the passage and the optical means to inhibit the movement of the debris and the second gases to the optical means.

30 25. A method of preventing an optical element in a laser from being dirtied by debris, including the steps of:

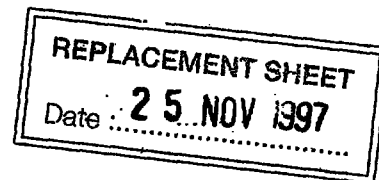

16

providing for a movement of energy radiation in a particular direction through a cavity toward the optical element,

directing gases into the cavity at a position
5 displaced from the optical element,

providing for the flow of the gases in the cavity in a direction away from the optical element and opposite to the direction of movement of the energy radiation in the cavity toward the optical element to inhibit any movement of
10 the debris in the cavity to the optical element, and

enhancing the action of the gases, during the flow of the gases in the cavity in the direction opposite to the direction of the movement of the energy radiation in the cavity toward the optical element, in inhibiting any movement
15 of the debris to the optical element.

26. A method as set forth in claim 25 wherein the gases are directed into the cavity through a passage and wherein


the gases are directed in the cavity through an
20 orifice in the cavity at a position further displaced in the cavity from the optical element than the passage to facilitate the flow of the gases in the cavity in the direction away from the optical element and opposite the direction of movement of the energy radiation in the cavity, the orifice being disposed
25 in the cavity to produce an acceleration in the movement of the gases in the cavity in the direction away from the optical element.

27. A method of preventing an optical element in a laser from being dirtied by debris, including the steps of:

30 providing for a movement of coherent energy in a particular direction through a cavity toward the optical element,

directing gases into the cavity at a position displaced from the optical element, and

35 providing for the flow of the gases in the cavity in a direction away from the optical element to inhibit any movement of the debris to the optical element, and wherein

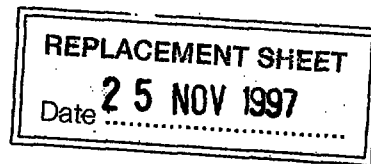

17

the gases are directed into the cavity through a passage and wherein

the gases are directed through an orifice at a position further displaced from the optical element than the passage to facilitate the flow of the gases in the direction away from the optical element, and wherein

a screen is disposed in the path of the gases in the cavity to remove any charged particles in the gases and wherein the screen is grounded to attract the charged particles.

28. A method of preventing an optical element in a laser from being dirtied by debris, including the steps of: providing for a movement of energy radiation in a particular direction through a cavity toward the optical element,

directing gases into the cavity at a position displaced from the optical element, and

providing for the flow of the gases in the cavity in a direction away from the optical element and opposite the direction of movement of the energy radiation toward the optical element to inhibit any movement of the debris to the optical element,

the gases are directed into the cavity through a passage and wherein

the gases are directed through an orifice at a position further displaced from the optical element than the passage to facilitate the flow of the gases in the direction away from the optical element and opposite the direction of movement of the energy radiation,

a baffle is disposed in the cavity to increase the path of movement of the gases from the passage to the orifice and to inhibit the movement of the debris to the optical element.

29. A method of preventing an optical element in a laser from being dirtied by debris, including the steps of: providing for a movement of energy radiation toward an optical element in a first direction through a cavity,



REPLACEMENT SHEET

Date 25 NOV 1997

18

there being in the cavity debris produced during the production of the energy radiation in the cavity,

passing gases through the cavity from a position displaced from the optical element and in a direction away
5 from the optical element and opposite the direction of movement of the energy radiation toward the optical element to inhibit the movement of the debris toward the optical element, and

electrically removing debris from the gases just
10 before the passage of the gases into the cavity.

30. A method of preventing an optical element in a laser from being dirtied by debris, including the steps of:
providing for a movement of energy radiation in a first direction through a cavity,

15 there being in the cavity debris produced during the production of the energy radiation in the cavity,

passing gases through the cavity from a position displaced from the optical element and in a direction away from the optical element to inhibit the movement of the debris
20 to the optical element, and

accelerating the flow of the gases through the cavity during the flow of the gases in the cavity in the direction away from the optical element, after the passage of the gases into the cavity in the direction away from the
25 optical element, to enhance the action in the cavity of inhibiting the movement of the debris to the optical element.

31. A method as set forth in claim 30 wherein the optical element is disposed relative to a passage providing for the movement of the gases into the
30 cavity so as to inhibit the gases from moving in the cavity past the optical element.

32. A method of preventing an optical element in a laser from being dirtied by debris, including the steps of:
providing for a movement of energy radiation in a
35 first direction through a cavity,



REPLACEMENT SHEET

Date 25 NOV 1997

19

there being in the cavity debris produced during the production of the energy radiation in the cavity, and

passing gases through the cavity from a position displaced from the optical element and in a direction away
5 from the optical element to inhibit the movement of the debris to the optical element, and wherein

an orifice is provided at a position further from the optical element than the passage to produce a venturi effect on the gases for insuring that the gases will move in
10 the cavity in a direction away from the optical element and wherein

turbulence is created in the gases between the passage and the orifice to further inhibit the movement of the debris to the optical element.