

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
8 September 2006 (08.09.2006)

PCT

(10) International Publication Number  
**WO 2006/092609 A1**

(51) International Patent Classification:  
*H04R 1/30* (2006.01) *H04R 7/12* (2006.01)

(21) International Application Number:  
PCT/GB2006/000753

(22) International Filing Date: 2 March 2006 (02.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0504248.6 2 March 2005 (02.03.2005) GB

(71) Applicant (for all designated States except US): **KH TECHNOLOGY CORPORATION** [GB/GB]; Floor 2, Zephyr House, Mary Street, George Town, Cayman Islands (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DODD, Mark** [GB/GB]; Twin Heights, Dukes Park, Woodbridge, Suffolk IP12 4DD (GB).

(74) Agents: **CLAYTON-HATHWAY, Anthony, Nicholas** et al.; Fry Heath & Spence LLP, The Gables, Massetts Road, Horley, Surrey RH6 7DQ (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LOUDSPEAKER

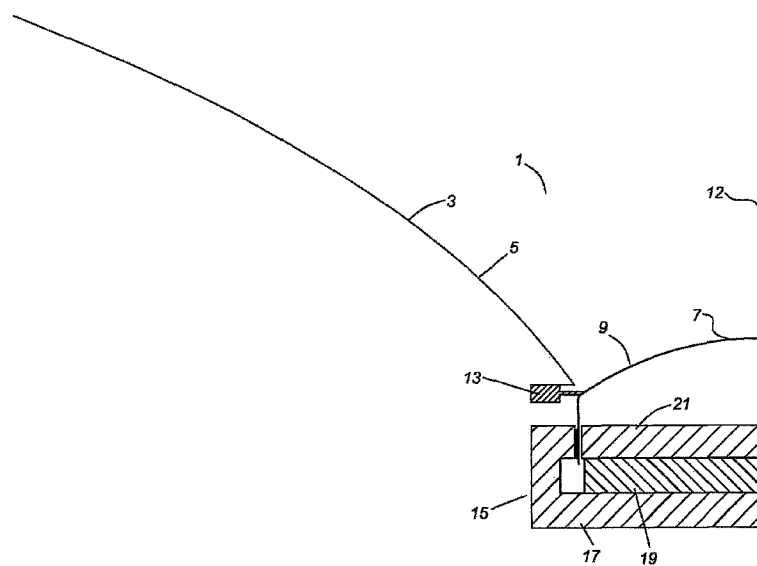

(57) Abstract: A loudspeaker comprises a horn waveguide having a waveguide surface, and a transducer located in, or adjacent to, a throat of the horn waveguide. The transducer has a substantially rigid convex dome-shaped acoustically radiating surface. A horn angle subtended between a longitudinal axis of the horn waveguide and the waveguide surface at the throat of the horn, is in the range 20 to 60 degrees. An intersection angle subtended between a plane tangential to the dome shape of the acoustically radiating surface and a plane tangential to the waveguide surface at a point where the dome shape or an extrapolation of the dome shape meets the waveguide surface or an extrapolation of the waveguide surface, is in the range 85 to 110 degrees.

WO 2006/092609 A1