


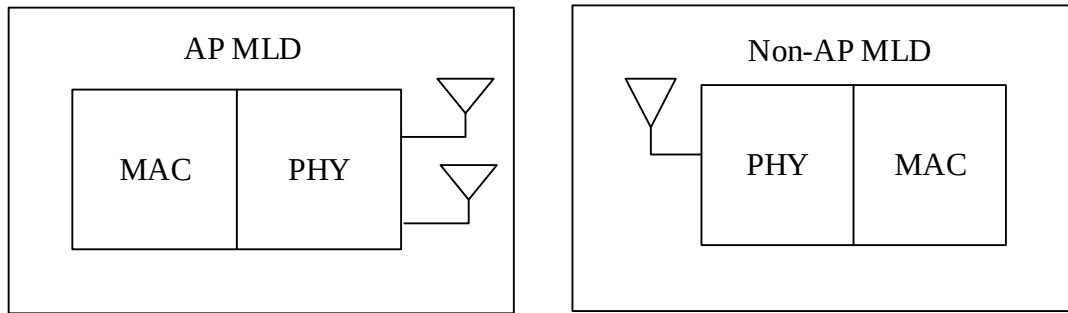

AP MLD: access point multi-link device;
Non-AP MLD: non-access-point multi-link device;
MAC: media access control;
PHY: physical layer.

FIG. 1

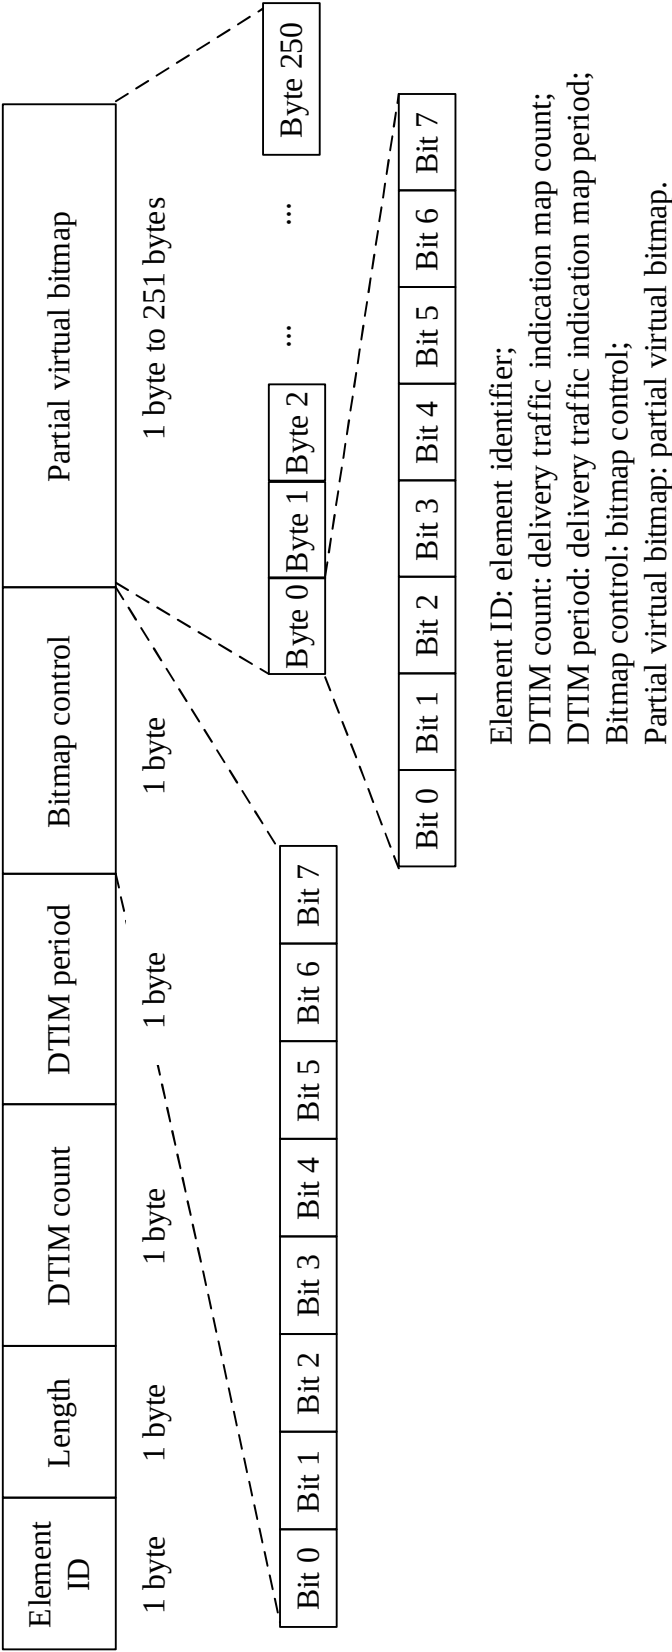


FIG. 2

Element ID	Length	Max BSSID indicator	Optional subelement
1 byte	1 byte	6 bytes	Variable

Element ID: element identifier;
BSSID: basic service set identifier.

FIG. 3

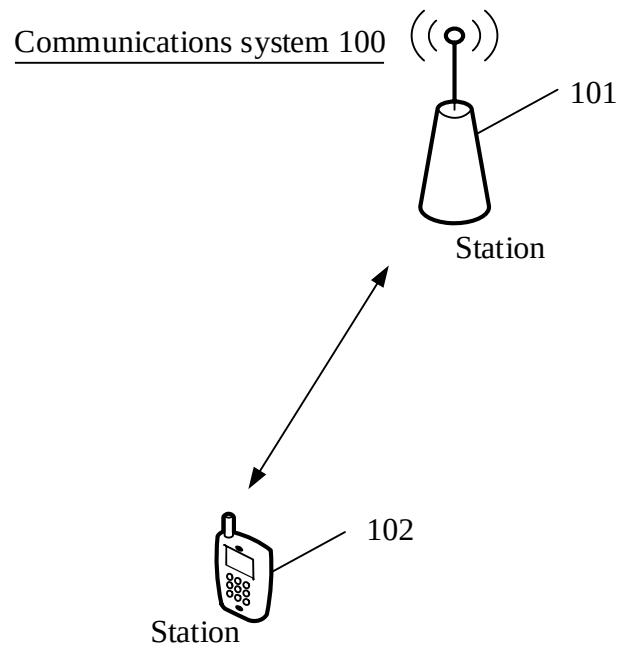
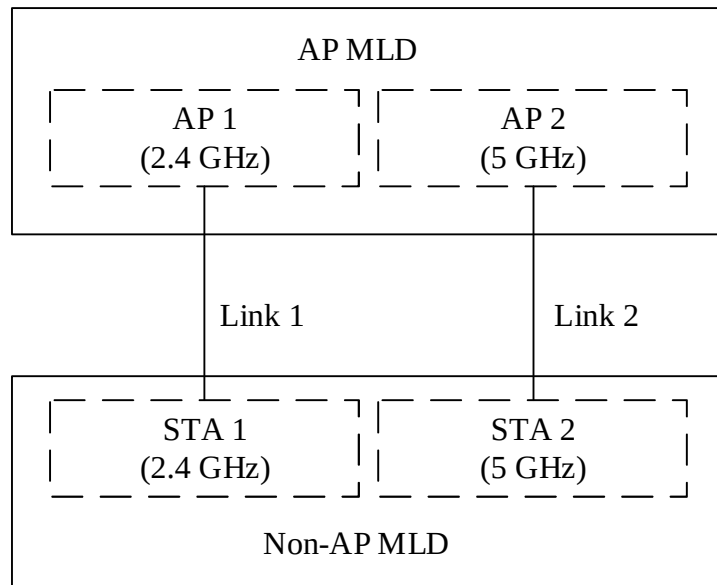


FIG. 4a

Communications system 200


AP MLD: access point multi-link device;

Non-AP MLD: non-access-point multi-link device;

AP: access point;

STA: station.

FIG. 4b

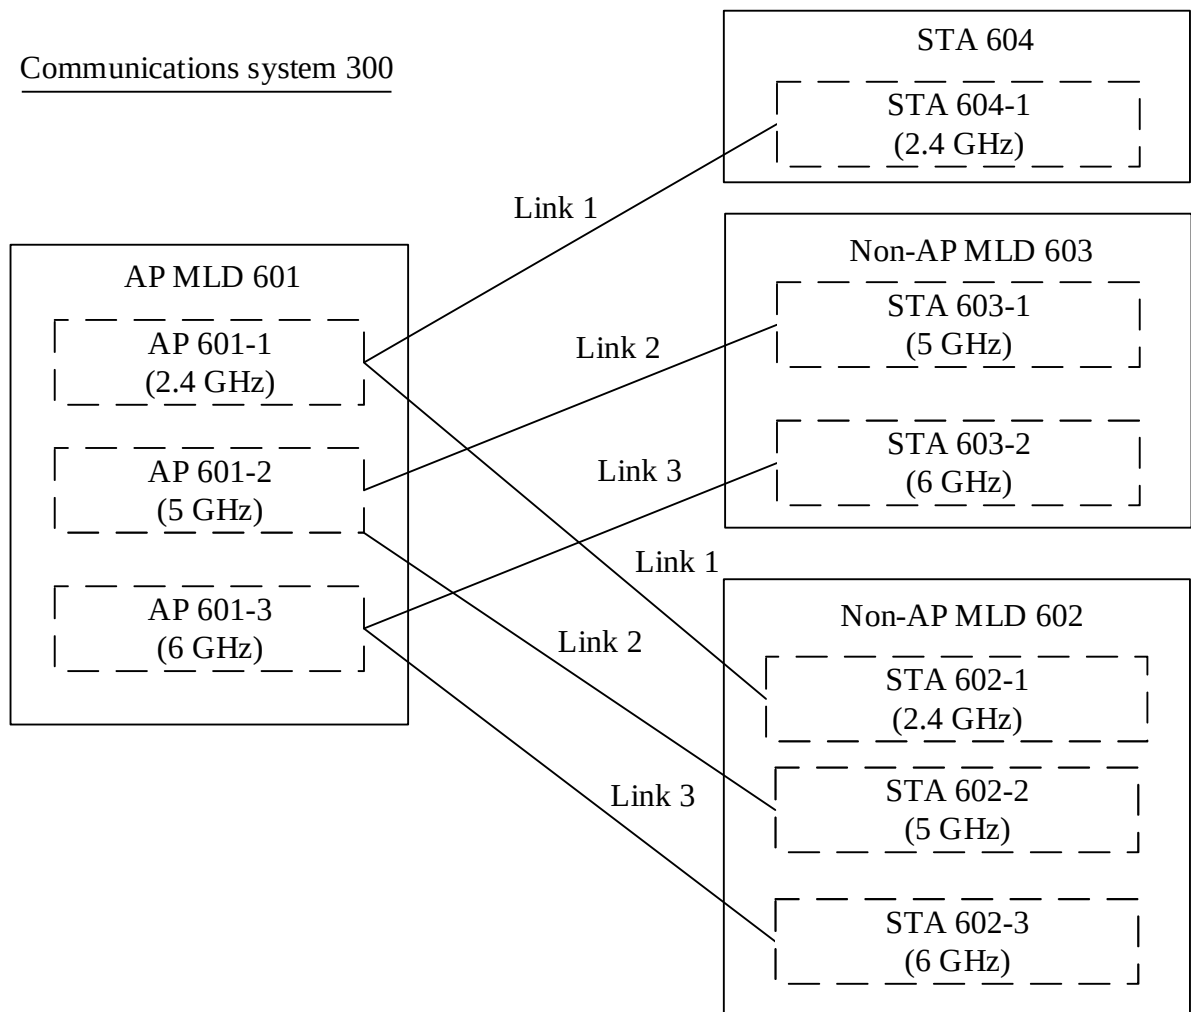Communications system 300

AP MLD: access point multi-link device;
Non-AP MLD: non-access-point multi-link device;
AP: access point;
STA: station.

FIG. 4c

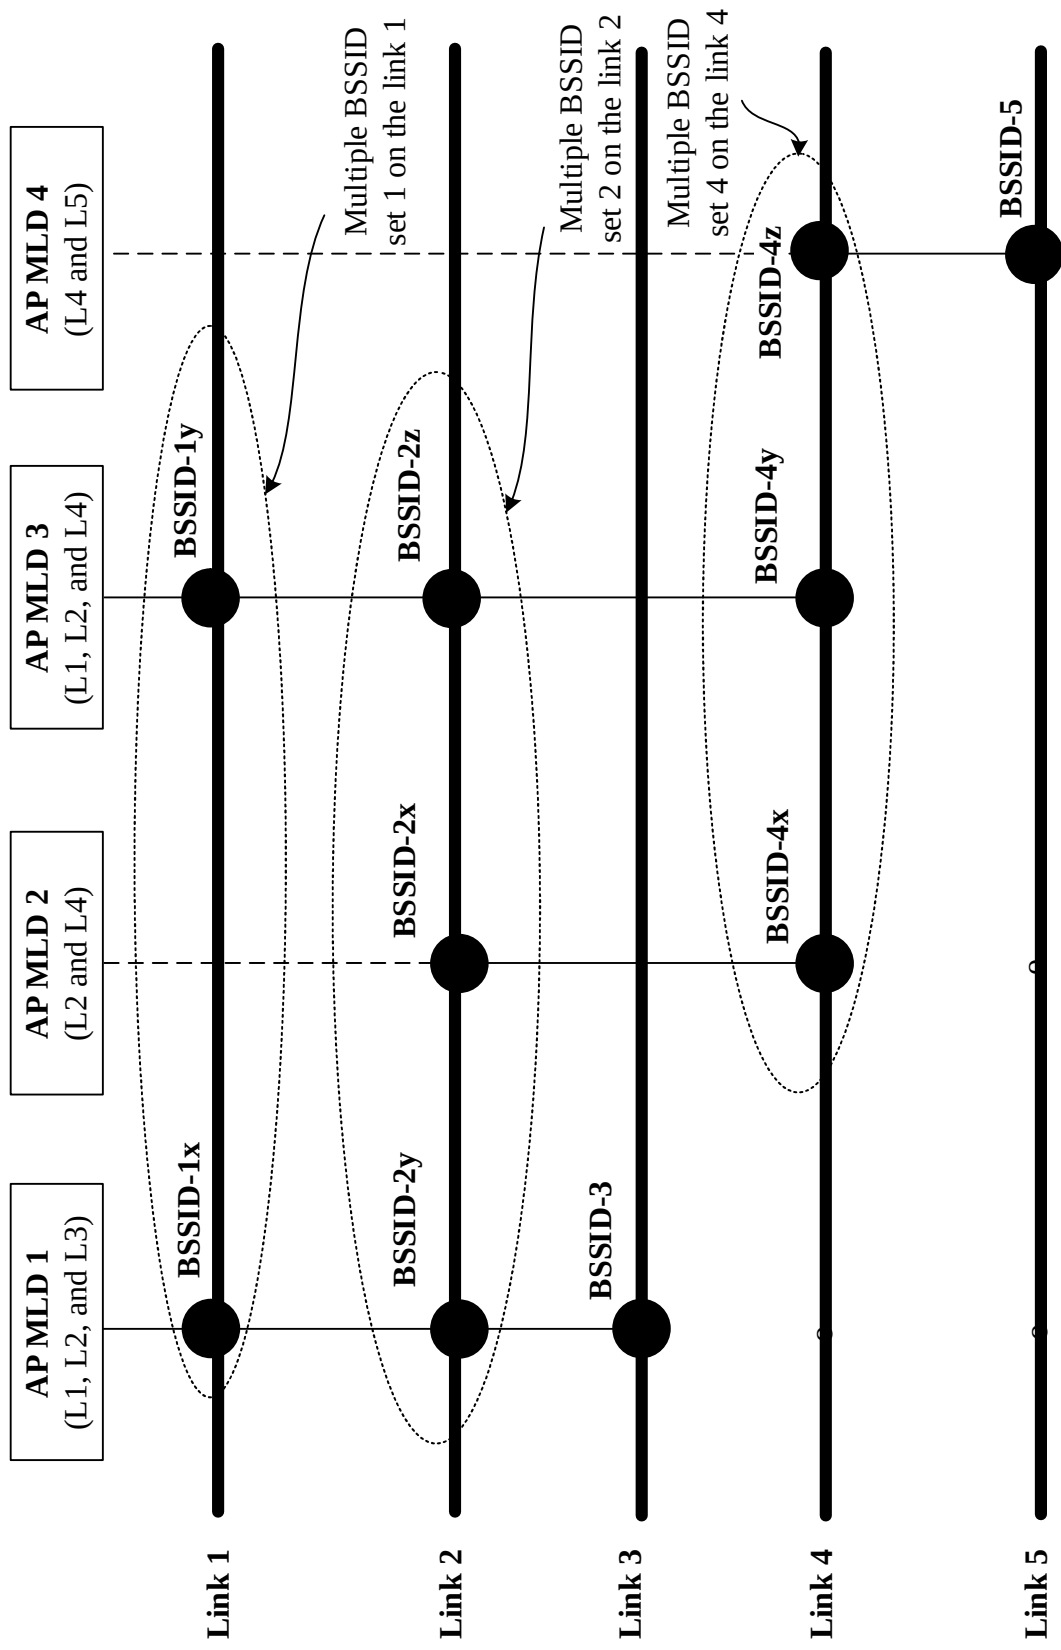


FIG. 5

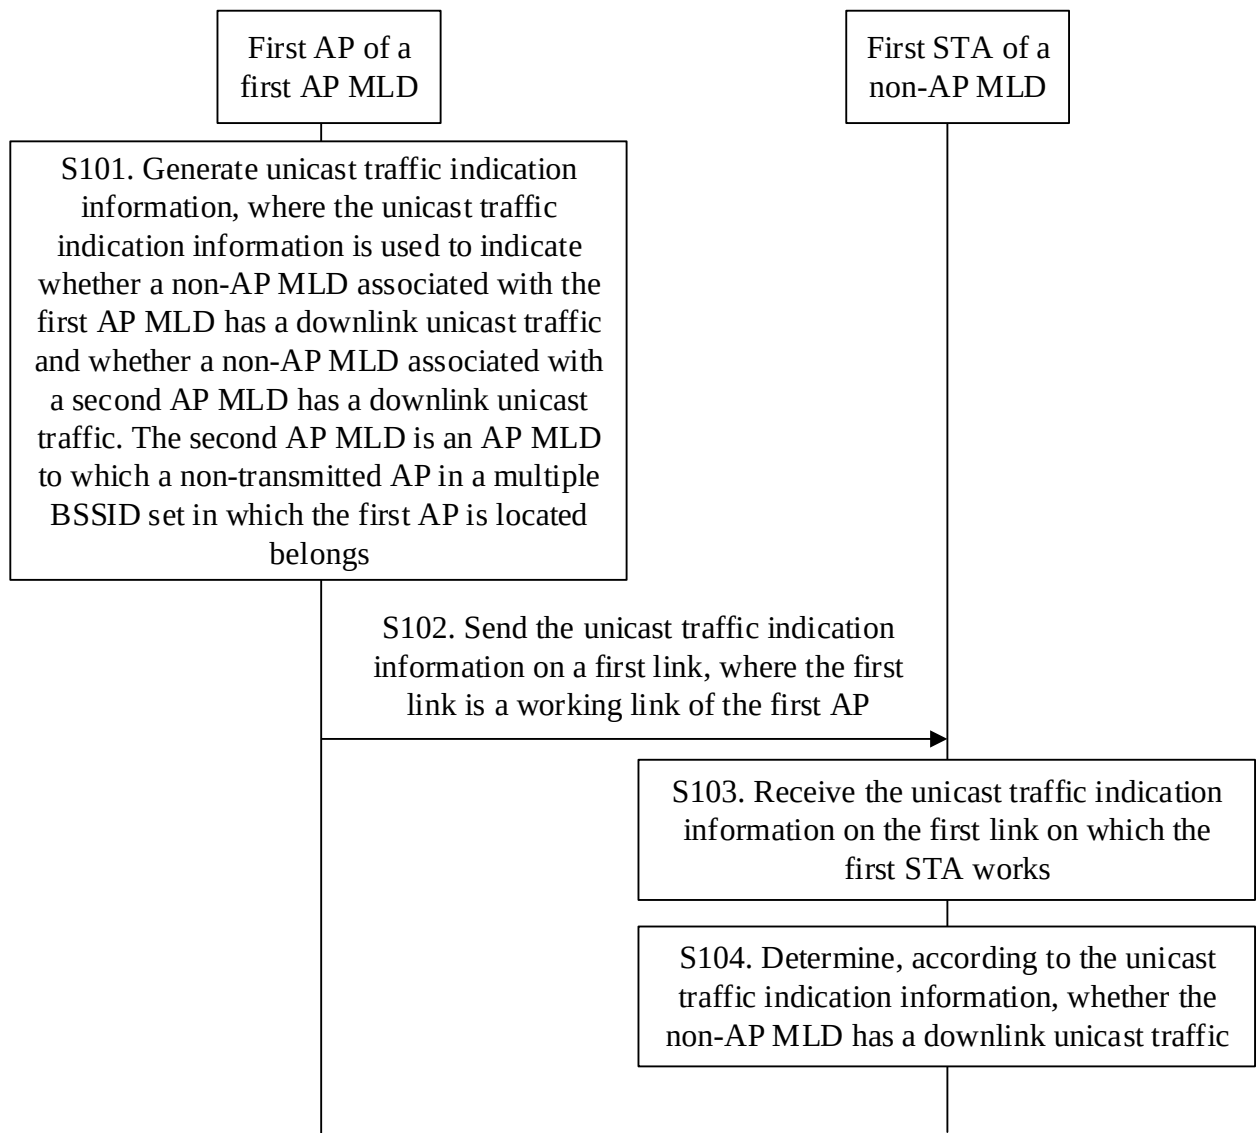


FIG. 6

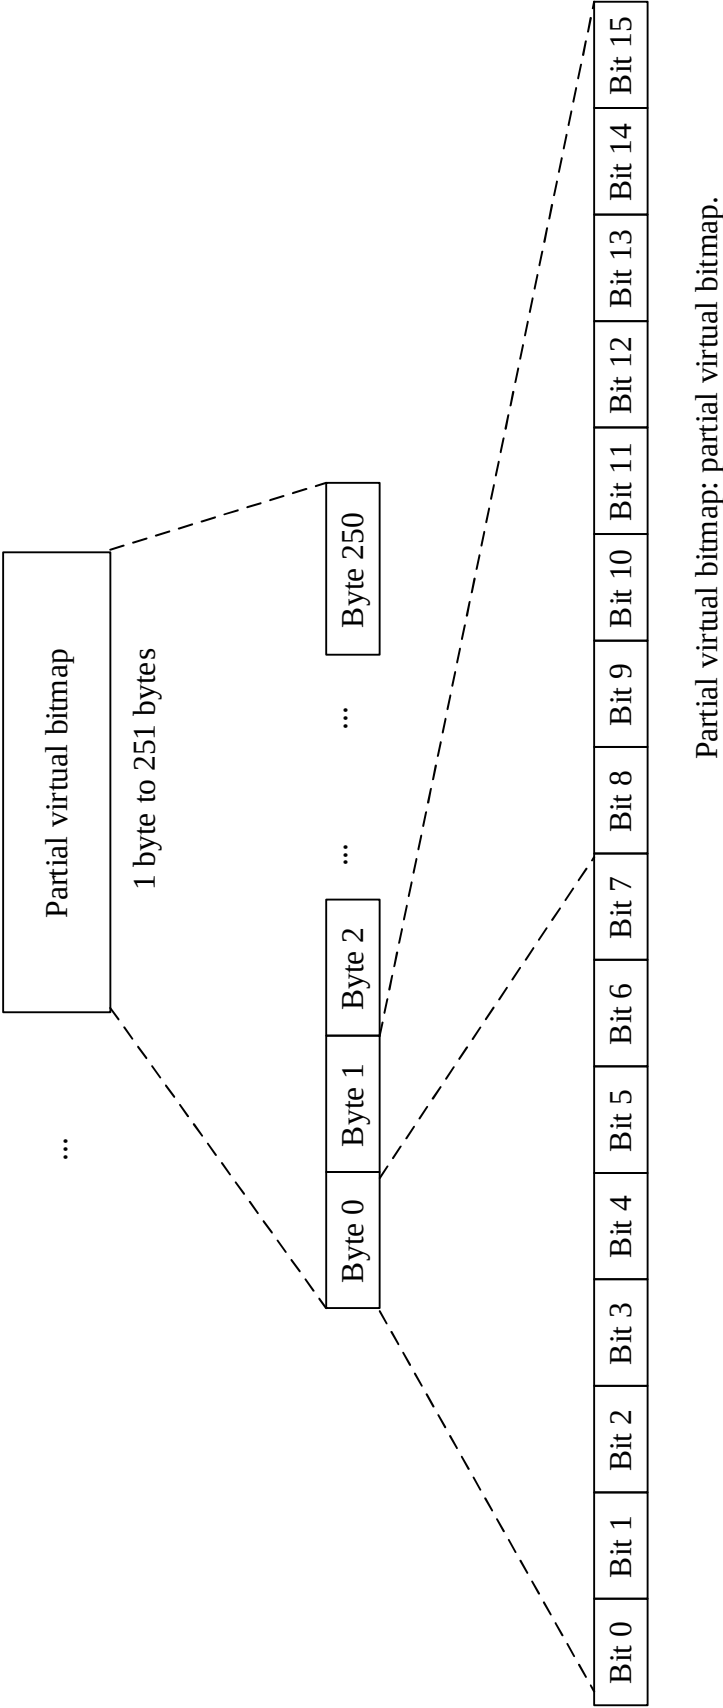


FIG. 7

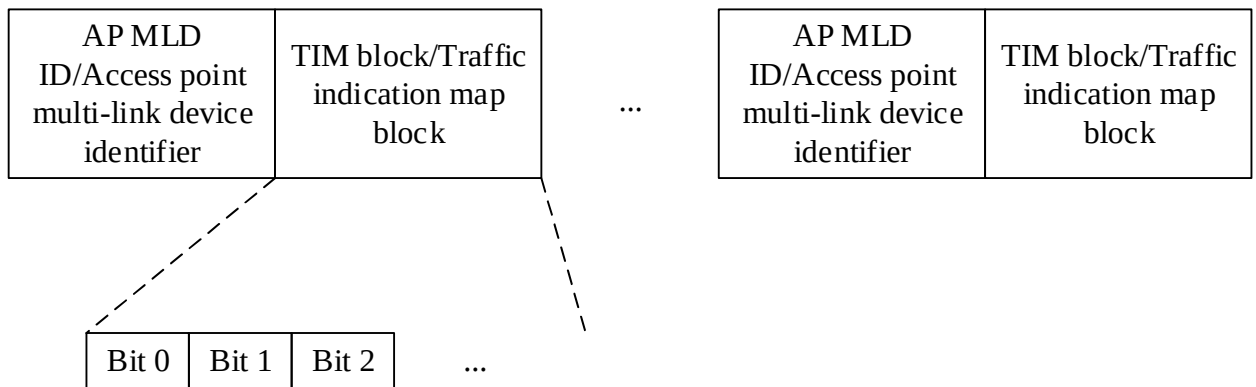


FIG. 8

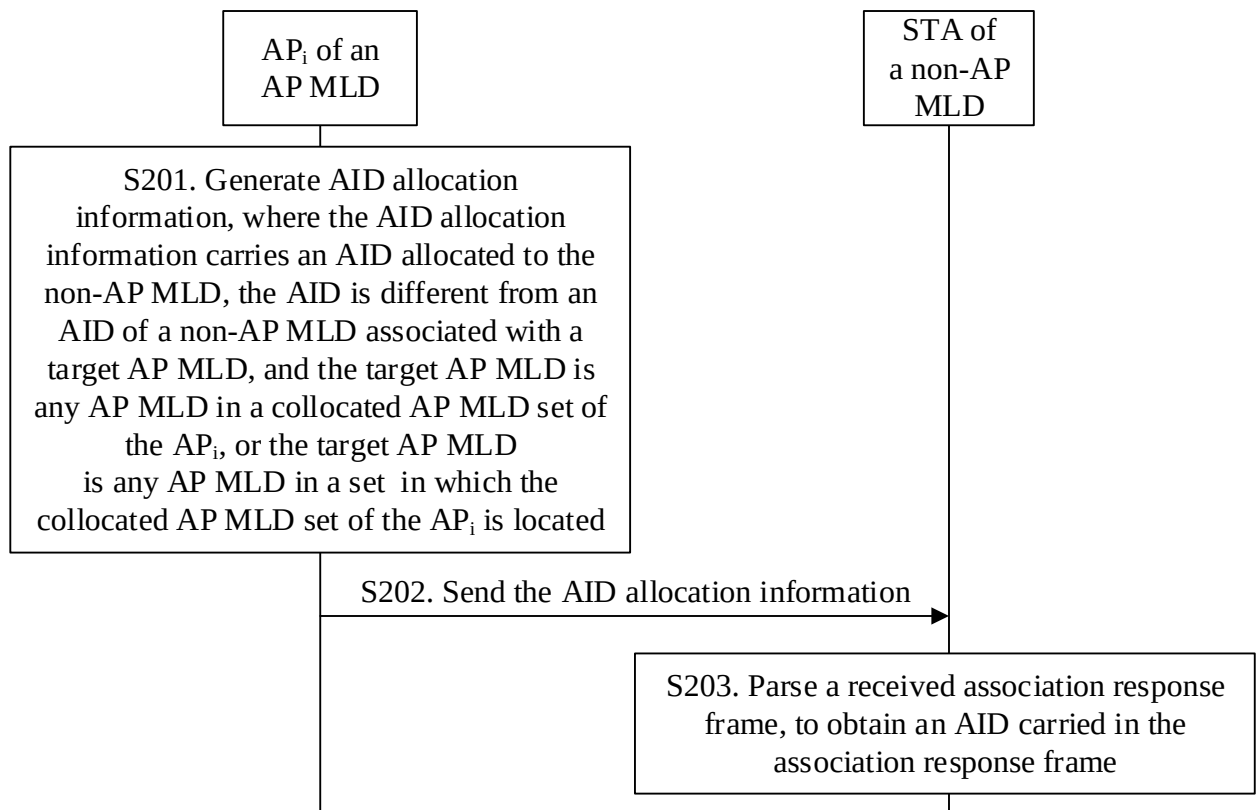


FIG. 9

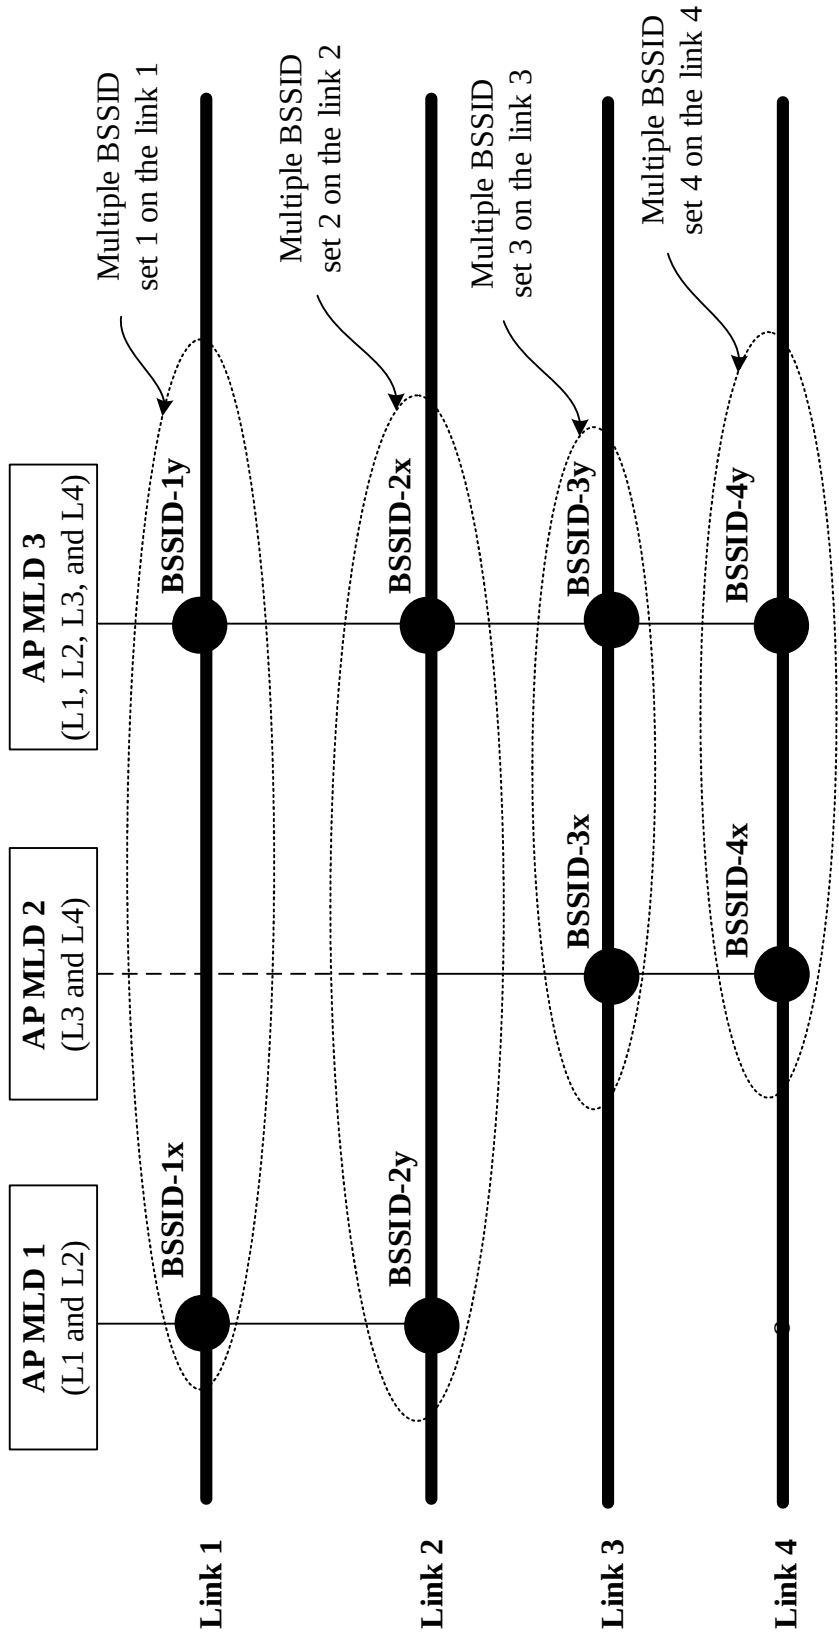


FIG. 10a

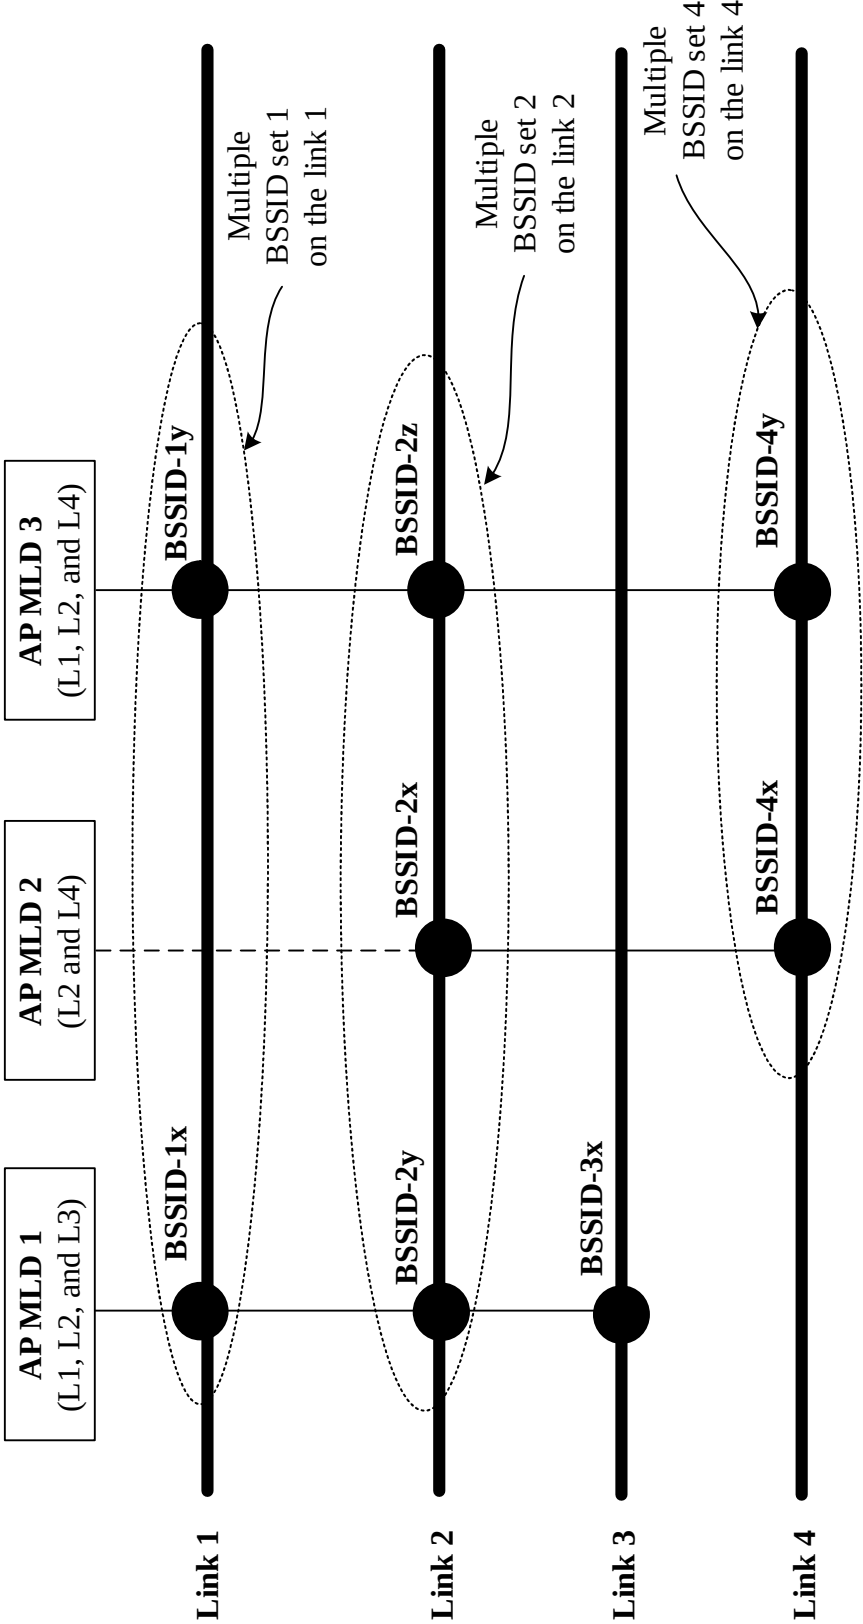


FIG. 10b

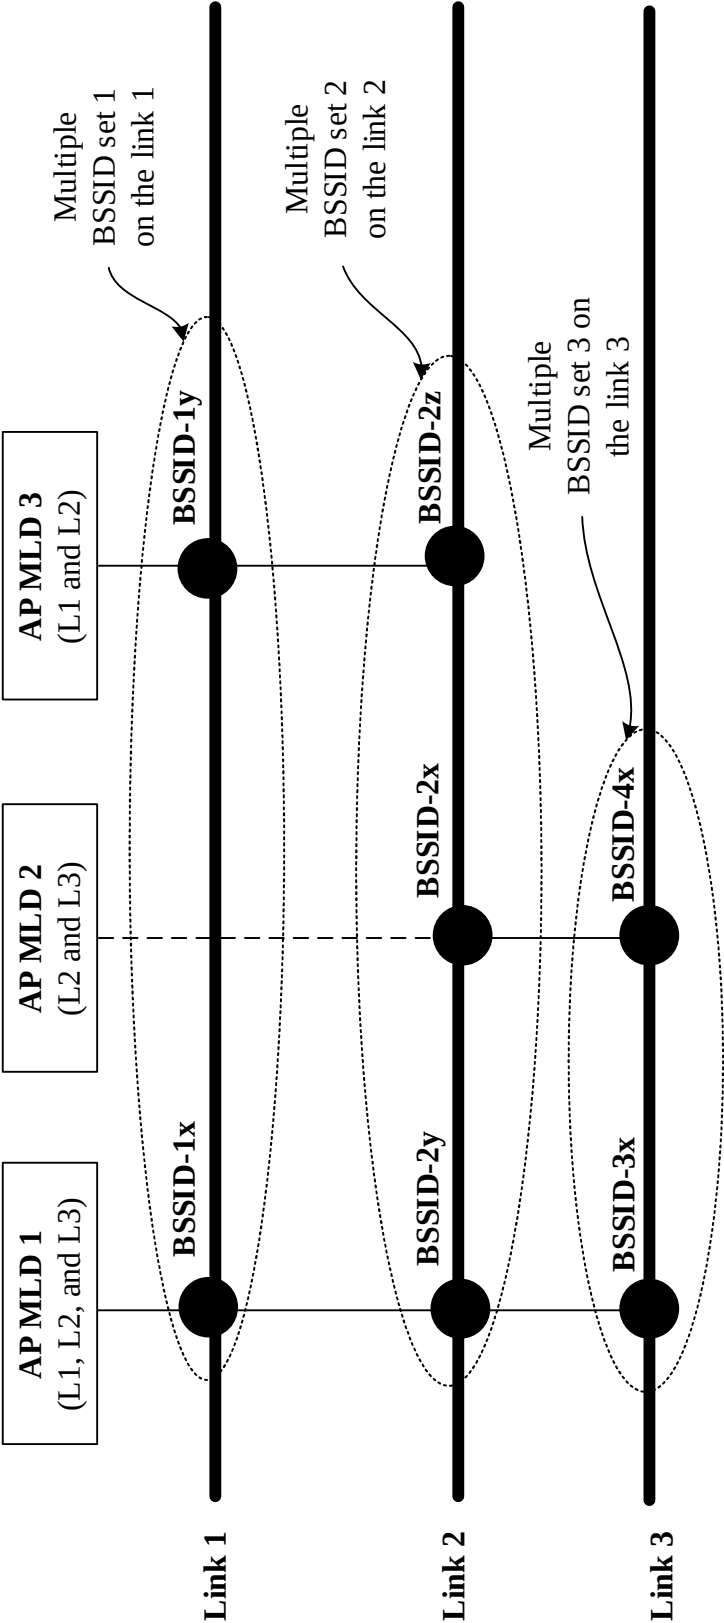


FIG. 10c

	Element identifier Element ID	Length Length	Association identifier AID
Bytes	1	1	2

FIG. 11

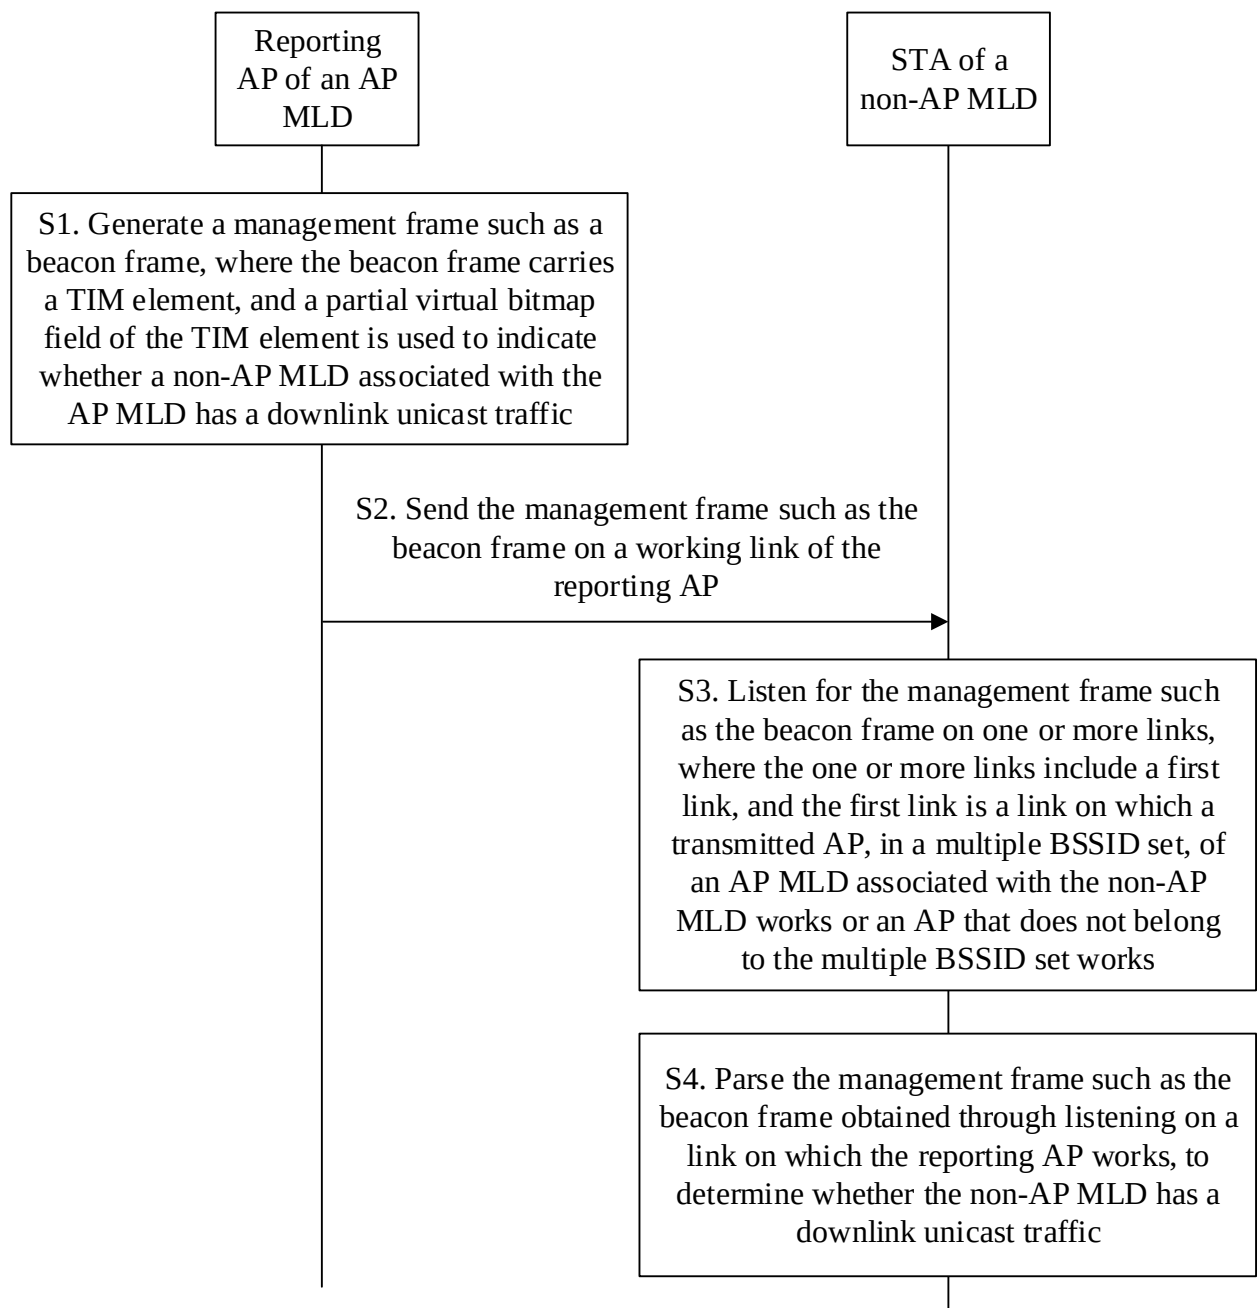


FIG. 12

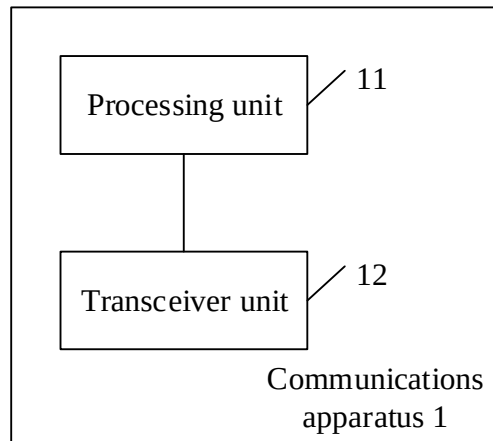


FIG. 13

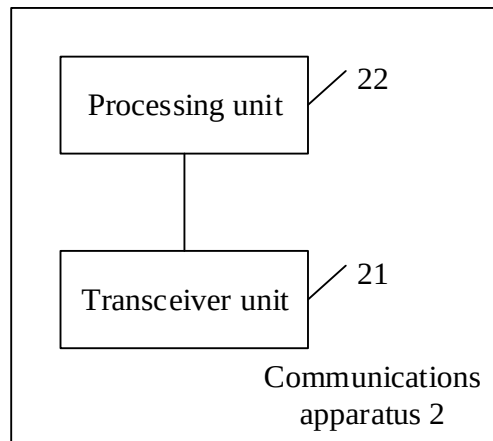


FIG. 14

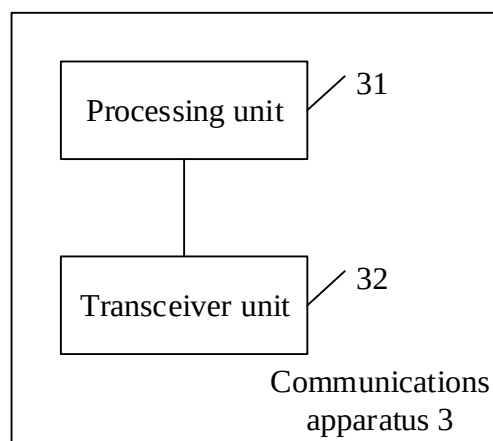


FIG. 15

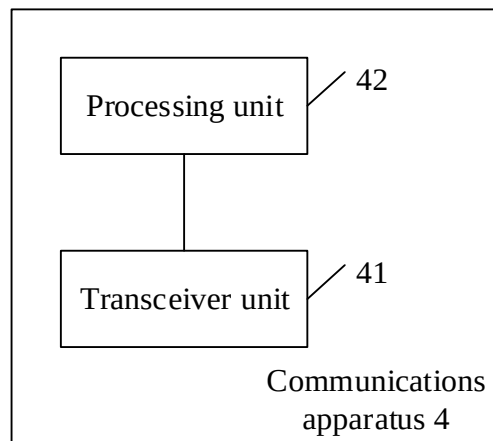


FIG. 16

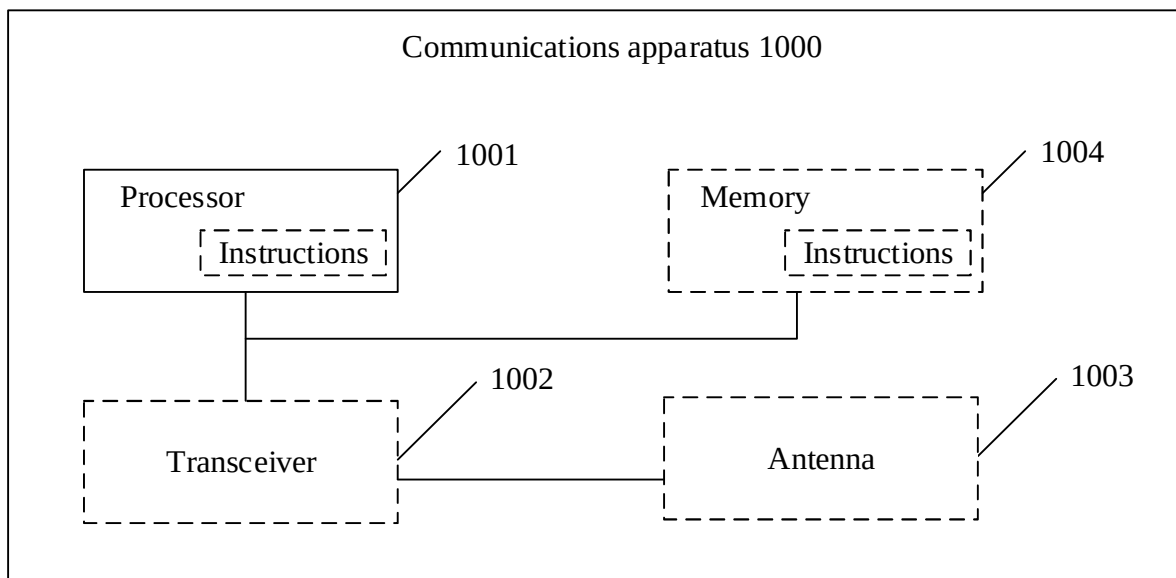


FIG. 17