




[図1]

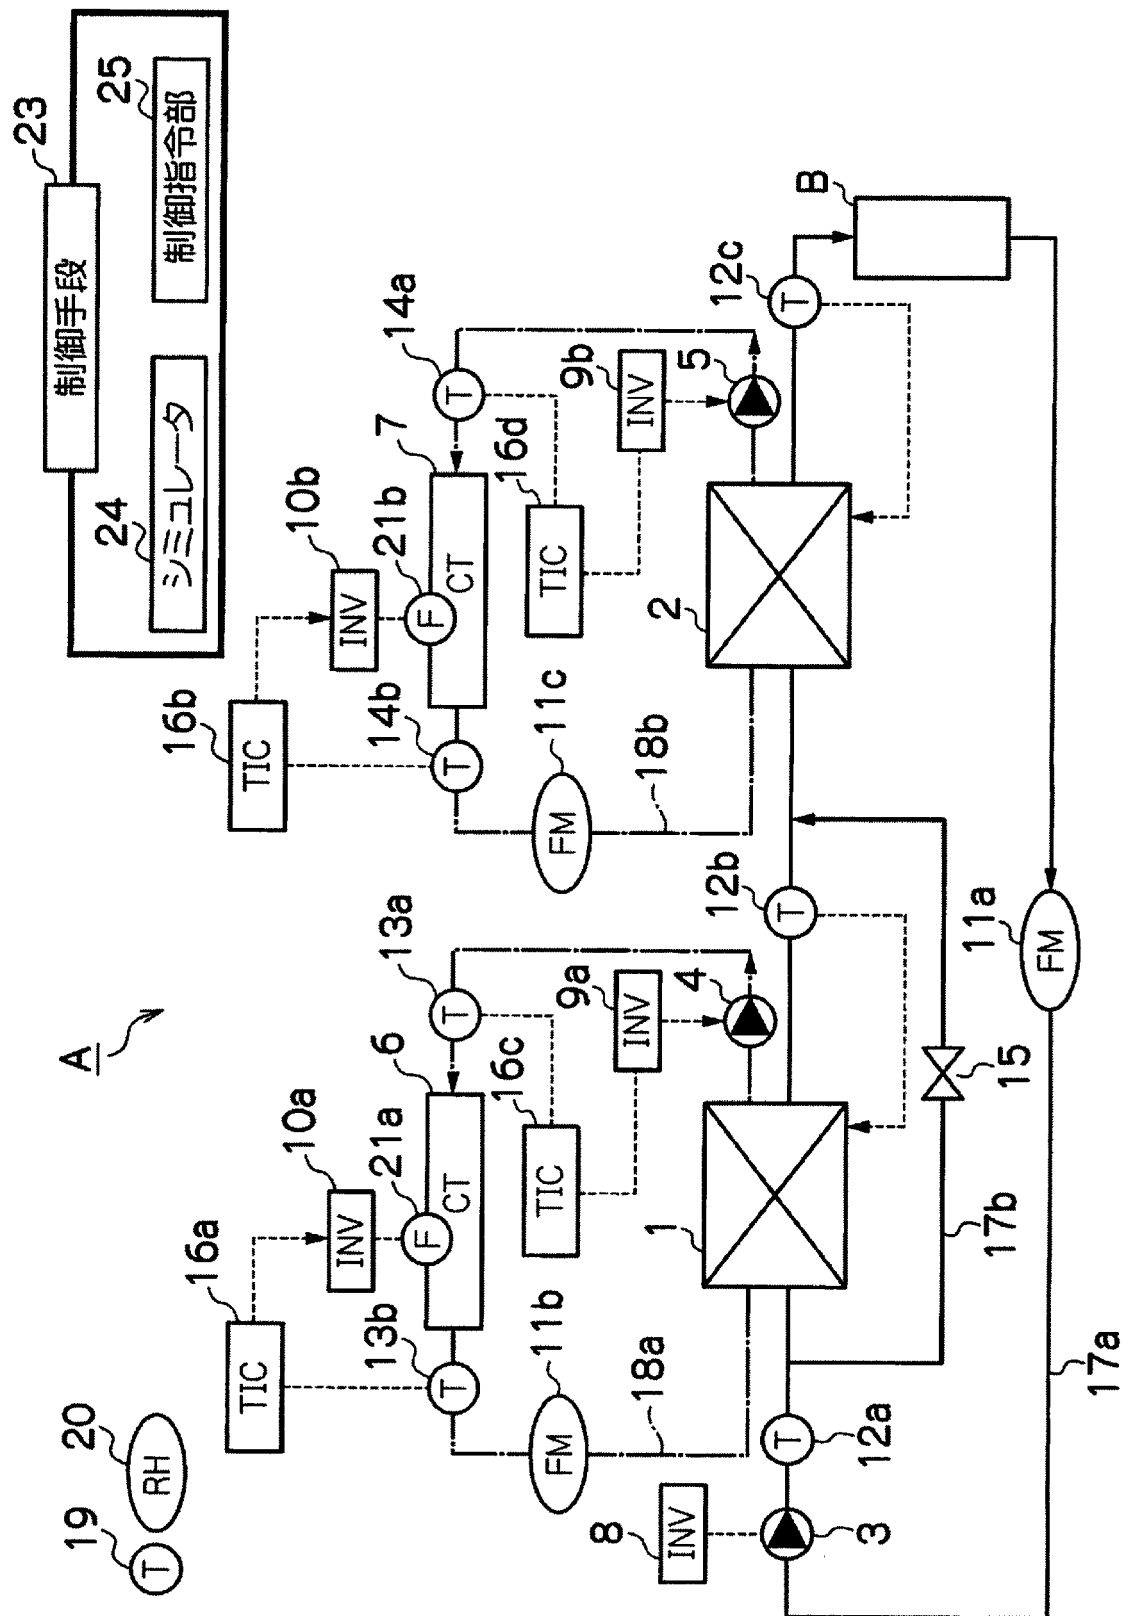


[図2]

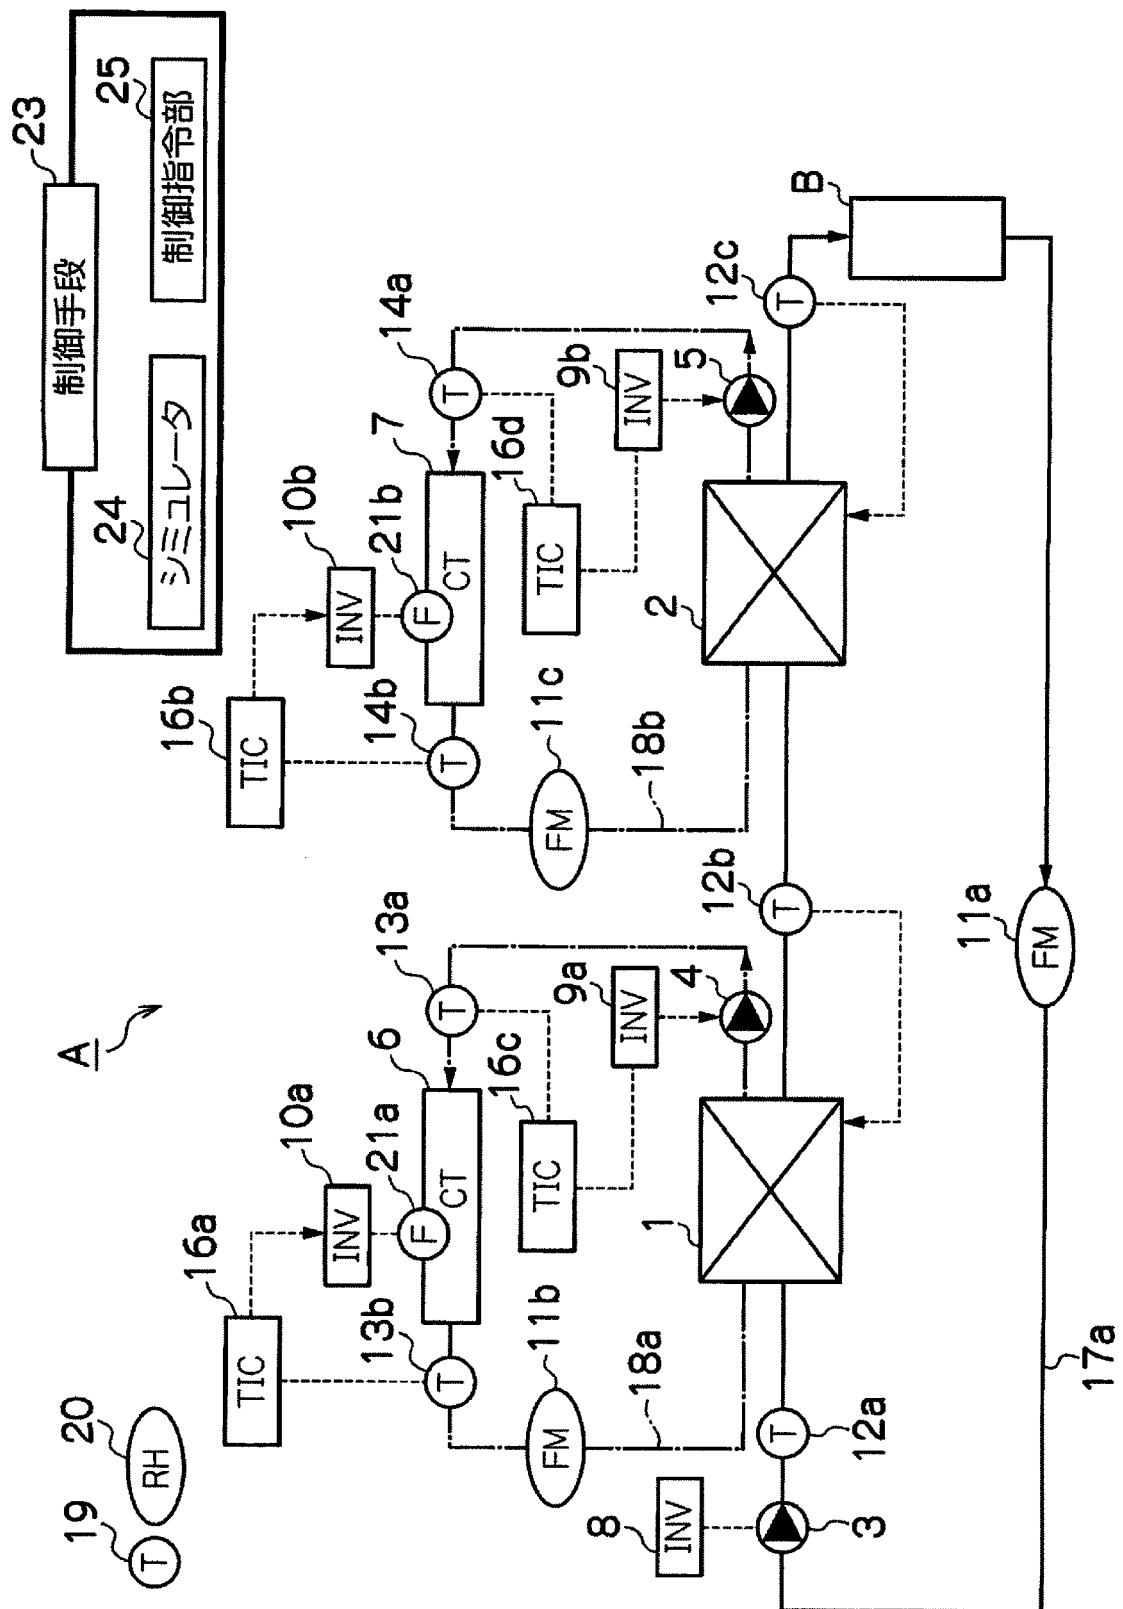


[図3]

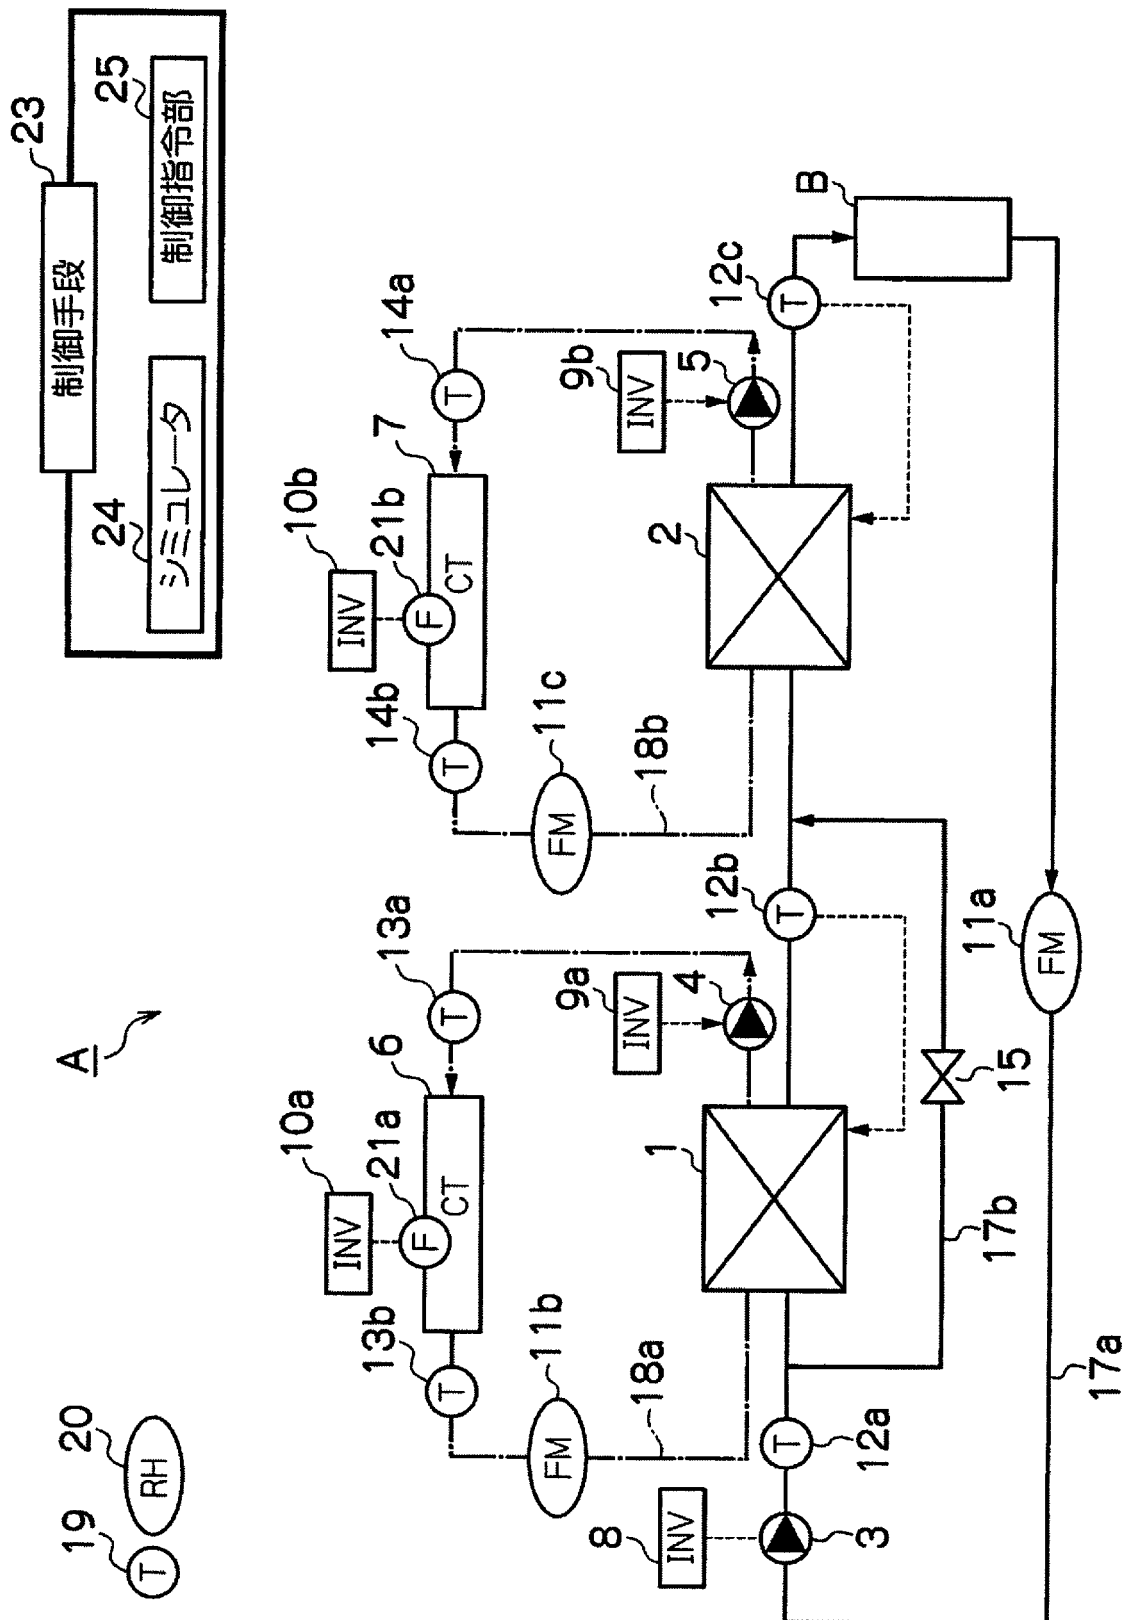

[図4]

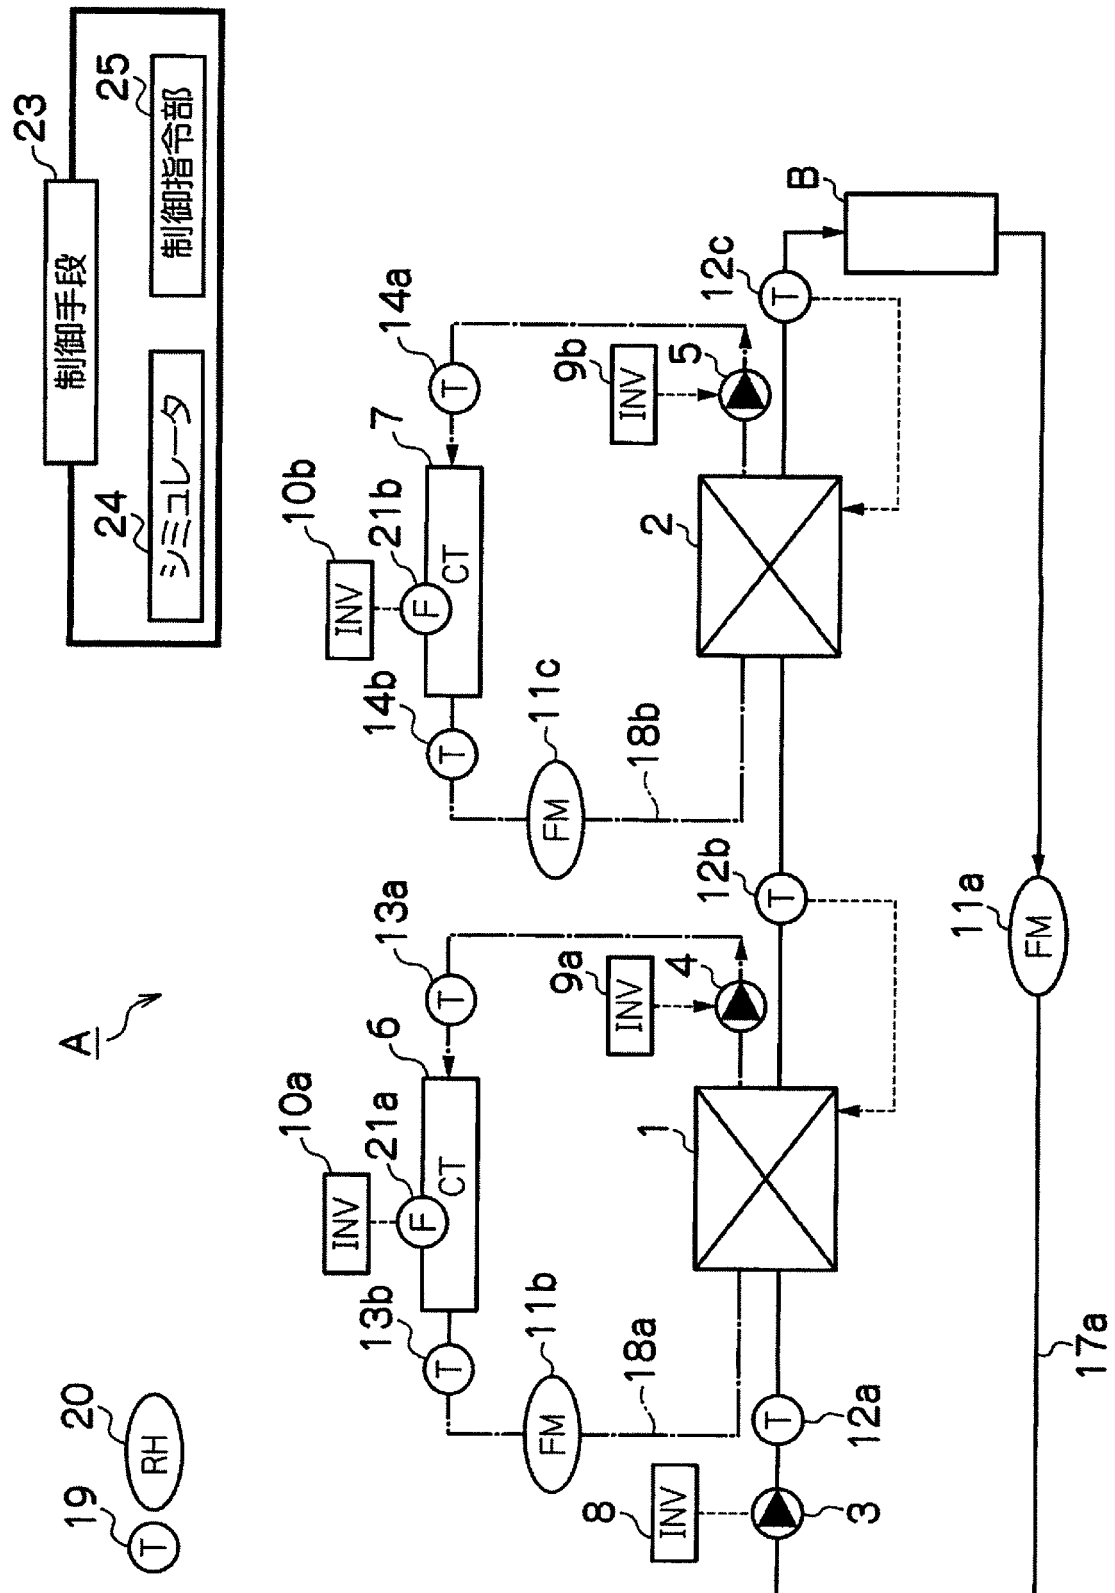

[図5]

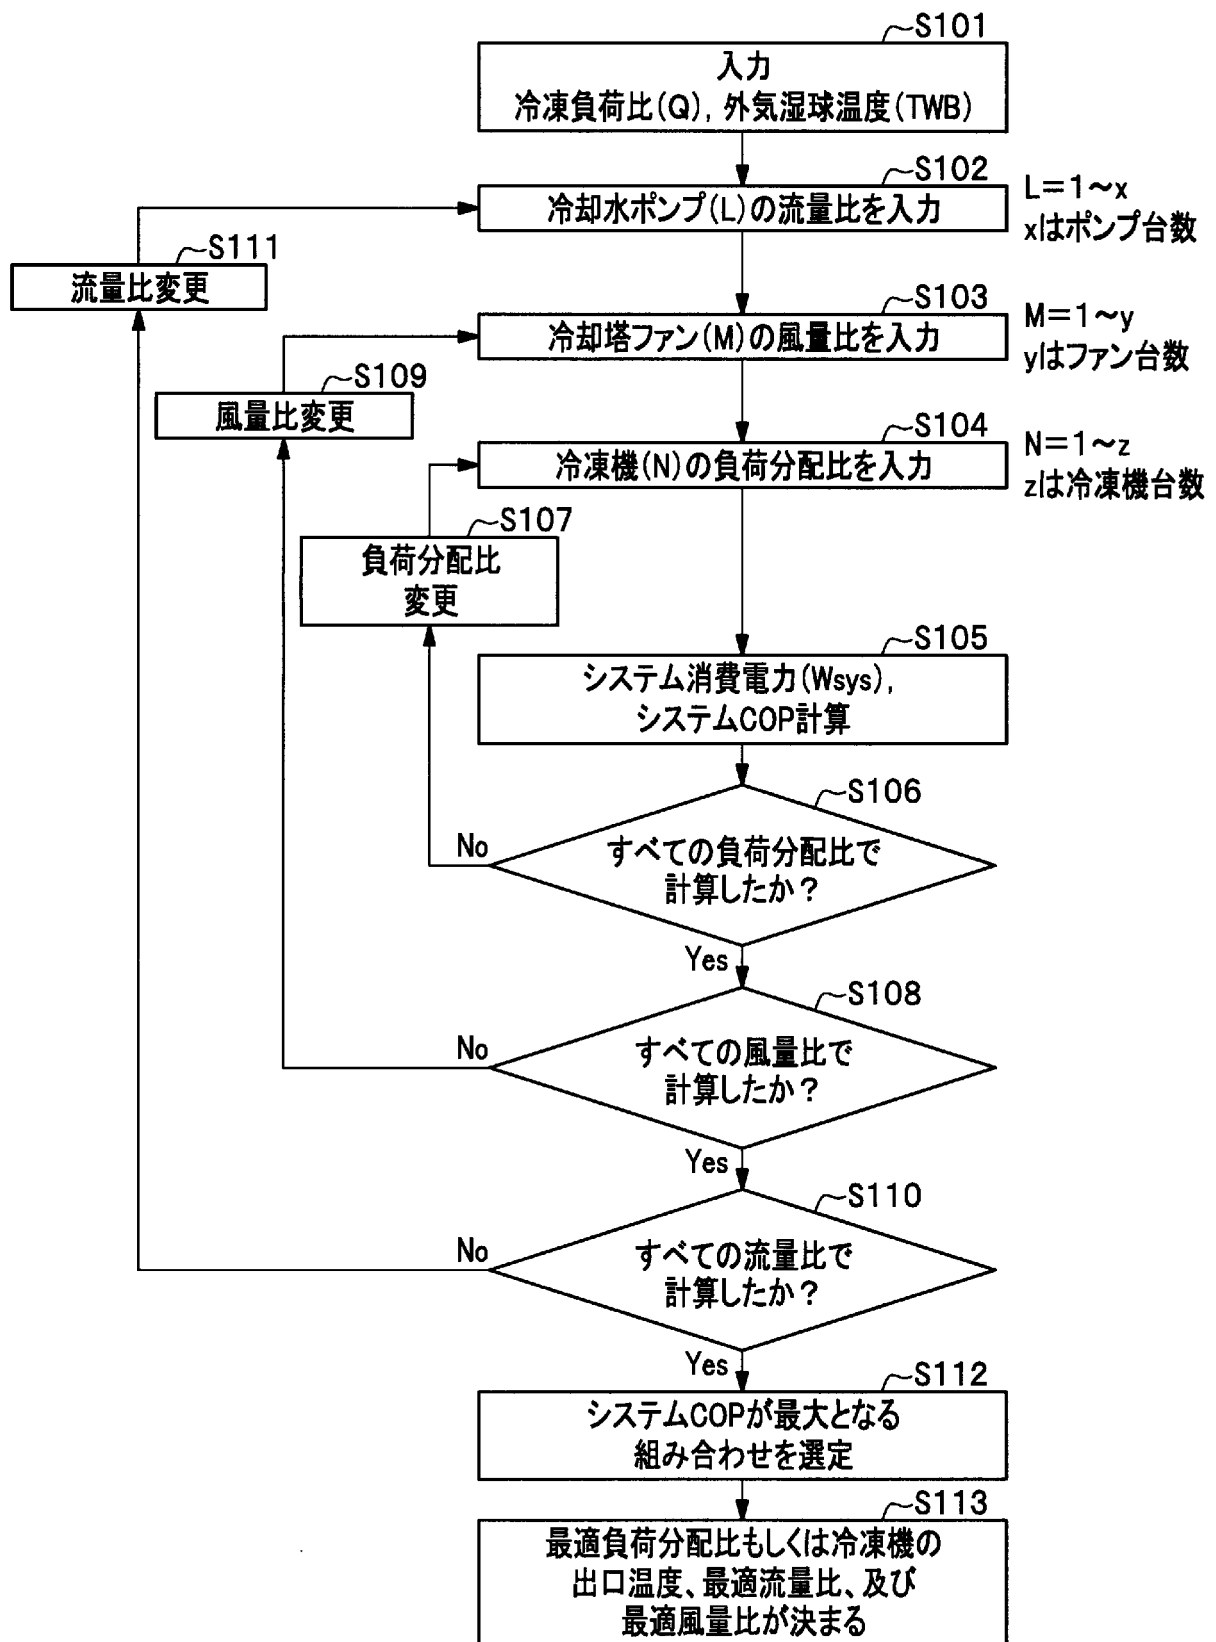

[図6]

冷却負荷比 Q(%)	湿球温度(℃)							
	10	11	12		28	29	30	
10	0	0	0		0	0	0	
20	0	0	0		0	0	0	
30	0	0	0		0	0	0	
40	0	0	0		0	0	0	
50	0	0	0		0	0	0	
60	75	75	75		50	60	100	
70	75	75	75		55	65	100	
80	80	80	85		55	100	100	
90	85	85	90		60	100	100	
100	100	100	100		100	100	100	

高温側の冷却水ポンプの流量比率(%)

[図7]

冷却負荷比 Q(%)	湿球温度(℃)							
	10	11	12		28	29	30	
10	0	0	0		0	0	0	
20	0	0	0		0	0	0	
30	0	0	0		0	0	0	
40	0	0	0		0	0	0	
50	0	0	0		0	0	0	
60	75	75	75		50	60	100	
70	75	75	75		55	65	100	
80	80	80	85		55	100	100	
90	85	85	90		60	100	100	
100	100	100	100		100	100	100	


高温側の冷却塔ファンの風量比率(%)

[図8]

冷却負荷比 Q(%)	湿球温度(℃)							
	10	11	12		28	29	30	
10	13.4	13.4	13.4		13.4	13.4	13.4	
20	13.4	13.4	13.4		13.4	13.4	13.4	
30	13.4	13.4	13.4		13.4	13.4	13.4	
40	13.4	13.4	13.4		13.4	13.4	13.4	
50	13.4	13.4	13.4		13.4	13.4	13.4	
60	8.9	8.9	8.9		8.9	8.9	8.9	
70	8.9	8.9	8.9		8.9	8.9	8.9	
80	8.9	8.9	8.9		8.9	8.9	8.9	
90	8.9	8.9	8.9		8.9	8.9	8.9	
100	8.9	8.9	8.9		8.9	8.9	8.9	

高温側冷凍機の出口冷水温度(℃)

[図9]

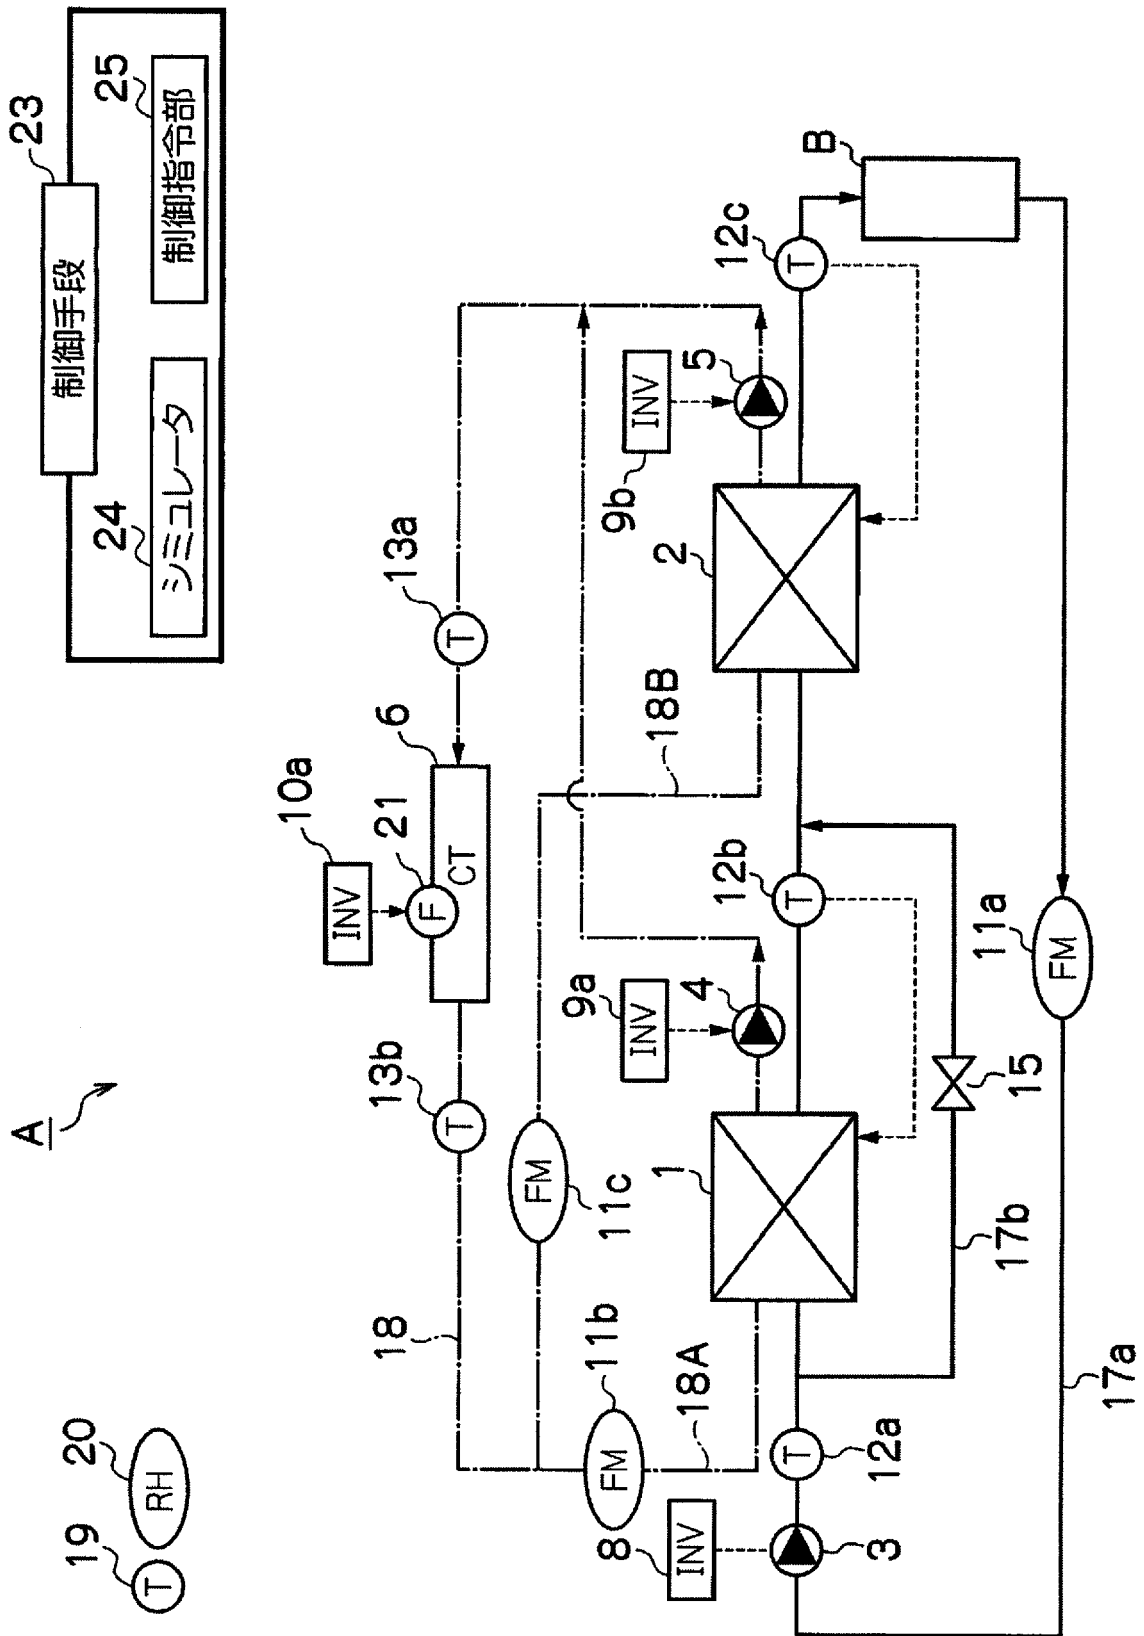

[図10]

