



(51) International Patent Classification:
G01F 1/84 (2006.01)

(21) International Application Number:
PCT/CN2012/086729

(22) International Filing Date:
17 December 2012 (17.12.2012)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: MICRO MOTION, INC. [US/US]; 7070
Winchester Circle, Boulder, Colorado 80301 (US).

(72) Inventors; and

(71) Applicants (for US only): FENG, Xiang [CN/CN]; Wei
Qiao Xin Cun 48#-502, Baixia District, Nanjing, Jiangsu
2100000 (CN). LIU, Muyuan [CN/CN]; Han Fu Xin Cun
62#-124, Xuanwu district, Nanjing, Jiangsu 210000 (CN).
CRISFIELD, Matthew, T. [US/US]; 4837 B. Whiterock
Circle, Boulder, Colorado 80301 (US). YE, Yang
[CN/CN]; Yin Xing Shan Zhuang 23#-401, Ningdan Road,
Yuhua district, Nanjing, Jiangsu 210012 (CN).

(74) Agent: CHINA PATENT AGENT (HK) LTD.; 22/F.,
Great Eagle Center, 23 Harbour Road, Wanchai, Hong
Kong (CN).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: IMPROVED CASE FOR A VIBRATING METER

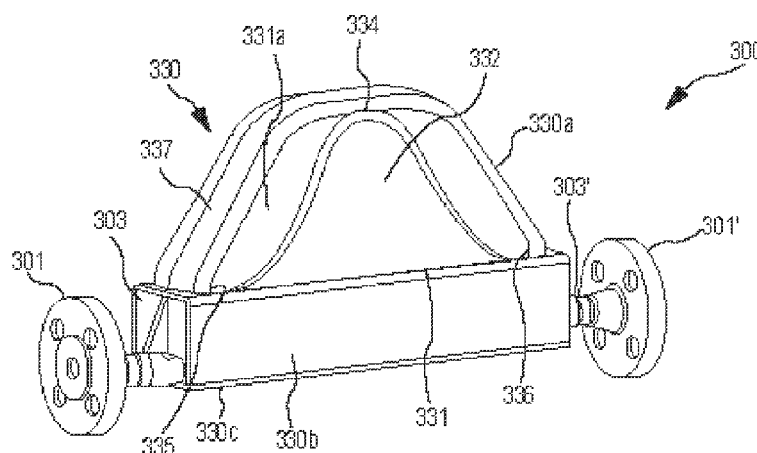


FIG. 4

(57) Abstract: A case (330) for a vibrating meter (300) is provided. The case (330) includes a first panel (331a) defined by at least a first edge (333) and a second edge (334). The case (330) also includes one or more indentations (332) formed in the first panel (331a). The one or more indentations (332) include at least a portion extending from the first edge (333) to the second edge (334). The resonant frequencies of the case can be increased and separated from the intended drive frequencies of the fluid conduits (306A, 306B).



Published:

— *with international search report (Art. 21(3))*