



(51) International Patent Classification:

E21B 34/06 (2006.01) **F16H 1/14** (2006.01)
F16H 1/16 (2006.01)

(21) International Application Number:

PCT/US2021/061732

(22) International Filing Date:

03 December 2021 (03.12.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/199,032 03 December 2020 (03.12.2020) US

(71) Applicant: **ONESUBSEA IP UK LIMITED** [GB/GB];
100 New Bridge Street, London EC4V 6JA (GB).

(71) Applicant (for IS only): **ONESUBSEA LLC** [US/US];
Corporation Trust Center, 1209 Orange Street, Wilmington,
Delaware 19801 (US).

(72) Inventors: **PATHAK, Parth Dilip**; 4646 W. Sam Houston
Pkwy. N., Houston, Texas 77041 (US). **DAVILA, Fred-**
erico; 19531 Lockridge Drive, Spring, Texas 77373 (US).

ARCELASCHI, Augusto; VIA PRATI DELLA ROSA
16-24, Lecco, 23823 Colico Piano (IT).

(74) Agent: **PAPE, Eileen** et al.; Schlumberger, 10001 Rich-
mond Avenue, Room 4720, Houston, Texas 77042 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: ELECTRICAL ACTUATOR

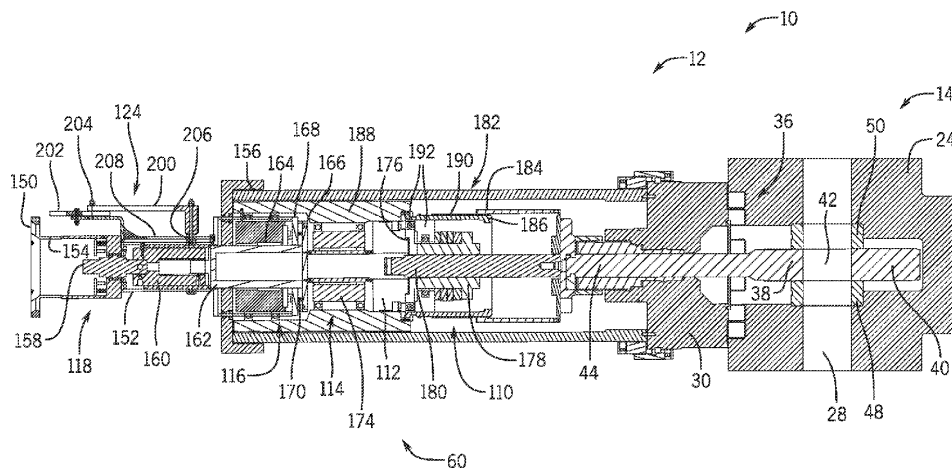


FIG. 9

(57) Abstract: A system includes an electric actuator having an actuation stem, a screw assembly, an electric drive, and a lock. The screw assembly is coupled to the actuation stem, wherein the screw assembly includes a male screw portion coupled to a female screw portion. The electric drive is coupled to the screw assembly, wherein the electric drive is configured to move the screw assembly to move the actuation stem. The lock is configured to hold a position of the actuation stem when not driving movement of the actuation stem.

[Continued on next page]

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*