

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 November 2002 (07.11.2002)

PCT

(10) International Publication Number
WO 02/089280 A1

(51) International Patent Classification⁷: **H02G 3/08**,
F16B 37/14

(21) International Application Number: PCT/GB02/01870

(22) International Filing Date: 25 April 2002 (25.04.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0110219.3 26 April 2001 (26.04.2001) GB

(71) Applicant and

(72) Inventor: **THOMPSON, Richard, John** [GB/GB]; 7
Holywood, Wolsingham, Bishop Auckland, Co Durham
DL13 3HE (GB).

(74) Agent: **VINSOME, Rex, Martin**; Urquhart-Dykes &
Lord, St. Nicholas Chambers, Amen Corner, Newcastle
Upon Tyne NE1 1PE (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ENCLOSURE SEALING DEVICE

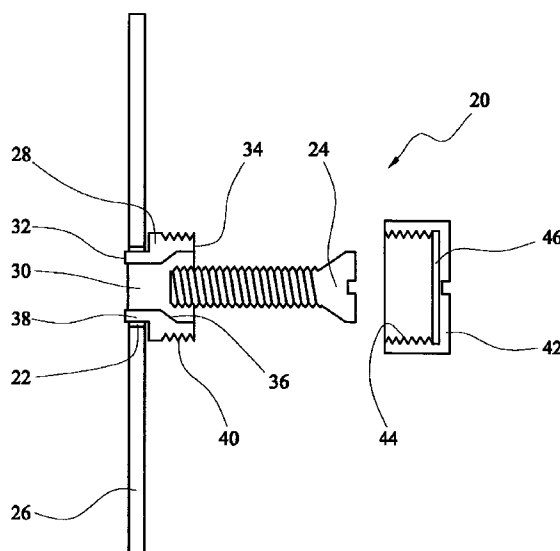

(57) Abstract: A device (20) for sealing an aperture (22) for a fixing such as a bolt (24) for a sealed enclosure (26) has a body (28) having an aperture (30) extending from a first surface (32) to a second surface (34). Body (28) also has a chamfered surface (36) and a retaining means (38) adjacent the first surface (32) to engage and seal the body (28) within aperture (22) of enclosure (26). Body (28) also has a cap engaging means (40) adjacent the second surface (34). The device also includes a cap (42) and a sealing gasket (46). In order to provide an adequate seal preventing water entering enclosure (26), the body 28 is inserted into aperture (22) and attached thereto. The enclosure is then offered to a wall and bolt (24) inserted through aperture is then offered to a wall and bolt (24) inserted through aperture (30) and fixed in a corresponding hole in the wall. The cap (42) can then be located on body (28) and gasket (46) assists in sealing the cap (42) and body (28).



WO 02/089280 A1