

200107817-9

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
1 November 2001 (01.11.2001)

PCT


(10) International Publication Number
WO 01/82299 A1

- (51) International Patent Classification⁷: G11B 11/105 (74) Agent: SCHRIJNEMAEKERS, Hubert, J., M.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/EP01/03939
- (22) International Filing Date: 6 April 2001 (06.04.2001) (81) Designated States (*national*): BR, CN, CZ, HU, JP, KR, PL, RU, SG.
- (25) Filing Language: English
- (26) Publication Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (30) Priority Data: 00201412.4 19 April 2000 (19.04.2000) EP Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors: VAN KESTEREN, Hans, W.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). PENNING, Frank, C.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MAGNETIC HEAD HAVING A MAGNETIC COIL

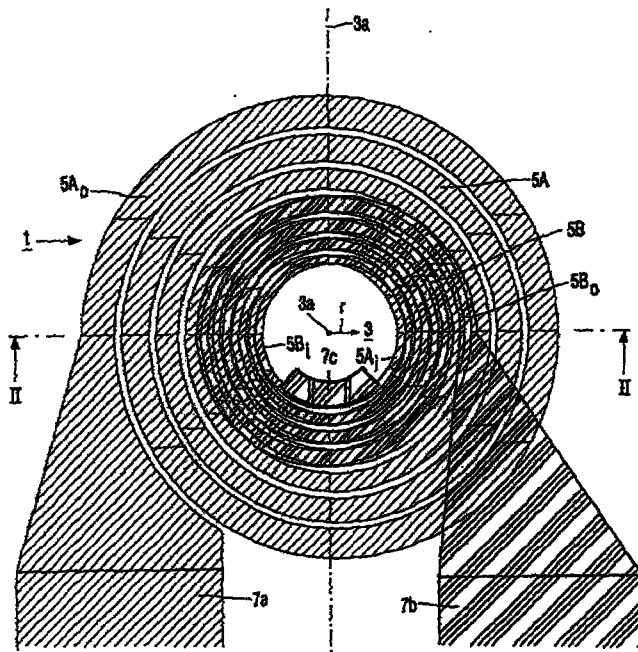

(57) Abstract: A magnetic head suitable for use in a magneto-optical apparatus. The magnetic head has a flat electromagnetic coil (1) with a central opening (3). The coil has parallel coil layers (5a, 5b), each of the coil layers having a turn (5A, 5B) arranged around the central opening. At least one of the coil layers has turns of which the turns closer to the central opening have smaller widths (w) than the turns further away from the central opening. At least one of the coil layers has an outermost turn (5B₀) situated closer to the central opening than the outermost turn (5A₀) of one of the other coil layers. The defined coil structure has a limited capacitance while the power dissipation is also limited.

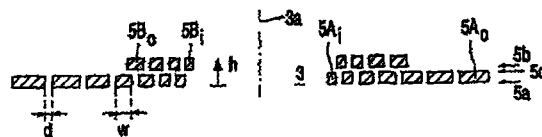

WO 01/82299 A1