

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 October 2002 (03.10.2002)


PCT

(10) International Publication Number
WO 02/077901 A2

- (51) International Patent Classification⁷: **G06K** (74) Agent: **RADLER, Daniel, G.**; Quarles & Brady LLP, 411 East Wisconsin Avenue, Milwaukee, WI 53202 (US).
- (21) International Application Number: PCT/US02/08084
- (22) International Filing Date: 18 March 2002 (18.03.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/277,497 21 March 2001 (21.03.2001) US
- (71) Applicant (for all designated States except US): **BRADY WORLDWIDE, INC.** [US/US]; 2221 West Camden Road, Milwaukee, WI 53209 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BENDA, Steven, J.** [US/US]; 13657 10th Street SW, Cokato, MN 55321 (US).
- (81) Designated States (*national*): AU, KR, SG, US.
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- Published:**
— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CIRCUIT BREAKER LOCK-OUT ASSEMBLY

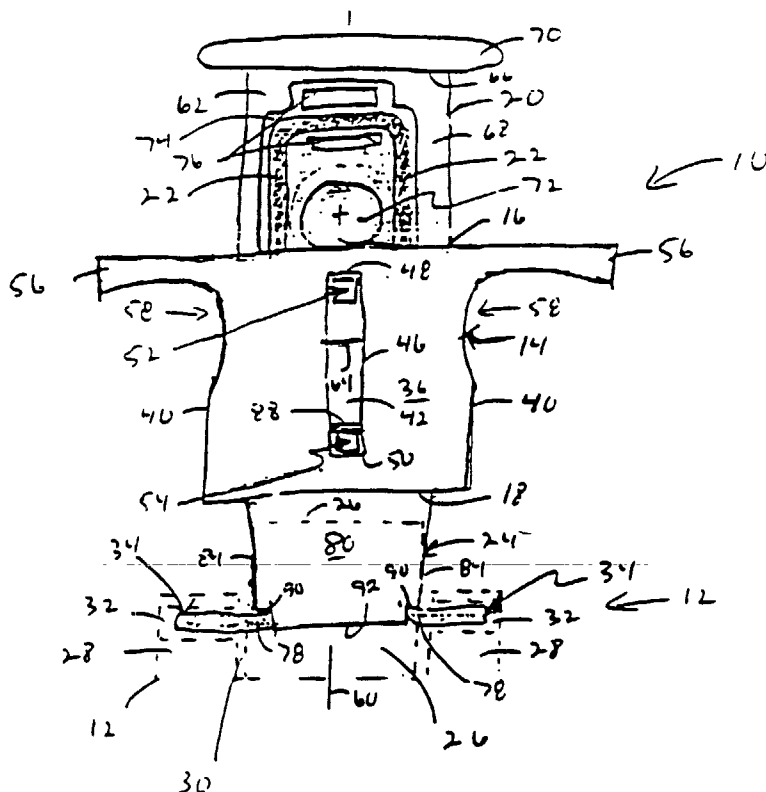

(57) Abstract: A circuit breaker lock-out assembly which is engageable with a circuit breaker includes a body having a top and a bottom joined by walls. The walls define a passageway extending from the body top to the body bottom. A button having one end extending into the body passageway through the body top is movable between a lock position and an unlock position. A pair of leaf springs are fixed to the button, and extend through the passageway. A nose extends from the body bottom, and is engageable with the leaf springs. A pin extends from each of the leaf springs. Each pin is engageable with a hole formed in the circuit breaker walls adjacent the switch tongue, wherein slidable movement of the button toward at least one of the lock position and unlock position engages the leaf spring with the nose to move each pin relative to the hole.

WO 02/077901 A2