

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 March 2003 (20.03.2003)


PCT

(10) International Publication Number
WO 03/022639 A1

- (51) International Patent Classification⁷: **B60R 19/02**, 19/03, 19/26, 19/34
- (21) International Application Number: PCT/US01/28582
- (22) International Filing Date:
12 September 2001 (12.09.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **GENERAL ELECTRIC COMPANY** [US/US]; 1 River Road, Schenectady, NY 12345 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **MOOIJMAN, Frank** [NL/NL]; Jacobsberg 38, NL-4661 NM Halsteren (NL). **MCMAHON, Dominic** [GB/NL]; Zuivelstraat 35b, NL-4611 PE Bergen op Zoom (NL). **MAHFET, Michael** [US/US]; 409 Buttercup Drive, Rochester Hills, MI 48307 (US).
- (74) Agents: **BEULICK, John, S.** et al.; Armstrong Teasdale LLP, One Metropolitan Square, Suite 2600, St. Louis, MO 63102 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: ENERGY ABSORBER WITH CRASH CANS

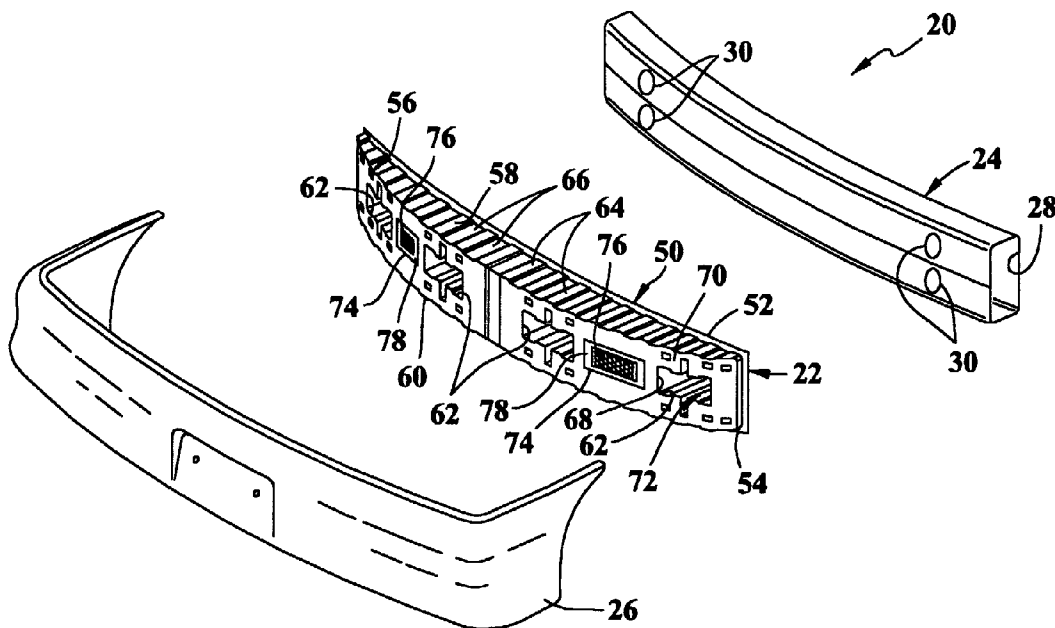

(57) Abstract: A bumper assembly (20) for an automotive vehicle is described. In an example embodiment, the assembly comprises a beam (24) and an injection molded energy absorber (22) secured to the beam. The energy absorber comprises at least one crash can (62). The assembly further comprises a fascia (26) for covering the beam and the energy absorber.



WO 03/022639 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.