




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A45D 19/02, 24/28		A1	(11) International Publication Number: WO 00/49907
			(43) International Publication Date: 31 August 2000 (31.08.00)
(21) International Application Number: PCT/IL00/00100 (22) International Filing Date: 17 February 2000 (17.02.00) (30) Priority Data: 09/253,775 22 February 1999 (22.02.99) US (71) Applicant (for all designated States except US): MONTEC PRODUCT DEVELOPMENT LTD. [IL/IL]; Weizman Boulevard 8, 47211 Ramat Hasharon (IL). (72) Inventor; and (75) Inventor/Applicant (for US only): SOFER, Menachem [IL/IL]; Yavne Street 13/1, 72219 Ramle (IL). (74) Agent: FRIEDMAN, Mark, M.; Beit Samueloff, Haomanim Street 7, 67897 Tel Aviv (IL).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: CARTRIDGE FOR HAIR DYE DISPENSER AND CORRESPONDING METHOD

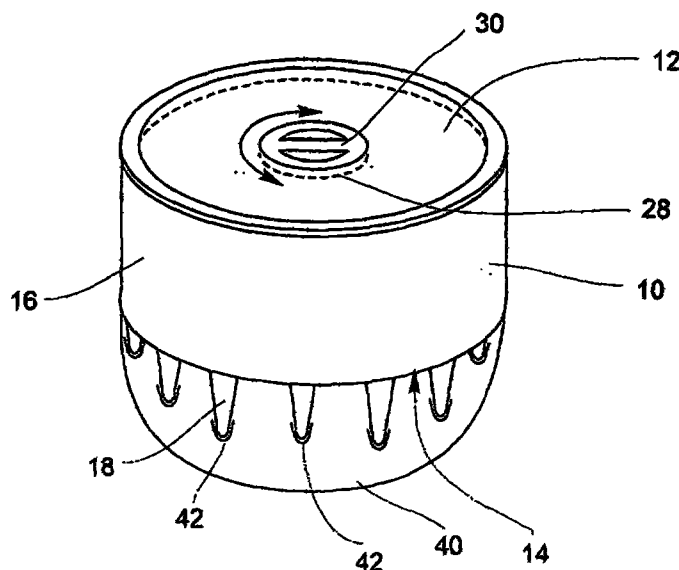

(57) Abstract

A cartridge for use in a hair dye dispenser includes a dispensing container (10) for containing and dispensing the hair dye, the dispensing container having a base (14) and at least one side wall (16) sealingly attached to or integrally formed with the base (14) so as to define an internal volume of the dispensing container. The base (14) has a lower surface that is formed with a number of projecting tines (18) and at least one dispensing aperture (20). A piston (12) is configured to fit closely in sliding abutment with the at least one side wall (16) so as to be sealingly slidable towards the base. The dispensing container and the piston are formed from polymer material, the piston being pressure-fitted within the dispensing container so as to define an initial position of the piston.