



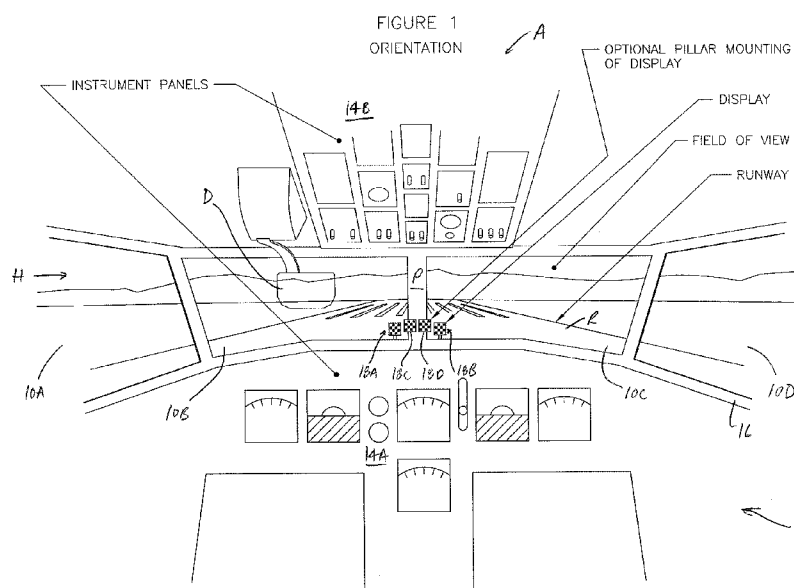
- (51) **International Patent Classification:**
B60T 8/17 (2006.01) *G01C 23/00* (2006.01)
- (21) **International Application Number:**
PCT/US2013/020710
- (22) **International Filing Date:**
9 January 2013 (09.01.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/587,802 18 January 2012 (18.01.2012) US
61/679,879 6 August 2012 (06.08.2012) US
13/603,610 5 September 2012 (05.09.2012) US
- (71) **Applicant:** ENGINEERED ARRESTING SYSTEMS CORPORATION [US/US]; 2550 Market Street, Aston, PA 19014 (US).
- (72) **Inventor:** GADZINSKI, John; 2005 Plowshares Court, Virginia Beach, VA 23453-6687 (US).
- (74) **Agents:** PRATT, John, S. et al.; Kilpatrick Townsend & Stockton LLP, 1100 Peachtree Street, Suite 2800, Atlanta, GA 30309 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** VEHICLE OPERATOR DISPLAY AND ASSISTIVE MECHANISMS

(57) **Abstract:** Detailed are assistive mechanisms for vehicle operators designed to reduce risks associated with degraded landing and other situations. Some mechanisms may include a display with a visual indicator located within the peripheral field of view of an operator. Aural alerts may also be employed. Information suggesting degradation of, for example, ground deceleration performance may alert the operator to perform unusual or abnormal actions to mitigate hazards produced by the performance degradation.