



(51) International Patent Classification:
F03B 15/06 (2006.01)

(21) International Application Number:
PCT/US2009/067631

(22) International Filing Date:
11 December 2009 (11.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/122,001 12 December 2008 (12.12.2008) US
12/634,957 10 December 2009 (10.12.2009) US

(71) Applicant (for all designated States except US): **AKER SOLUTIONS INC.** [US/US]; 3600 Briarpark, Houston, TX 77042 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PAULO, Paulo, Cezar Silva** [BR/US]; 25307 Calico Woods Lane, Katy, TX 77494 (US).

(74) Agents: **WHIPPLE, Matthew, L.** et al.; Zarian Midgley & Johnson PLLC, 960 Broadway Avenue, Suite 250, Boise, ID 83706 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SUBSEA BOOSTING CAP SYSTEM

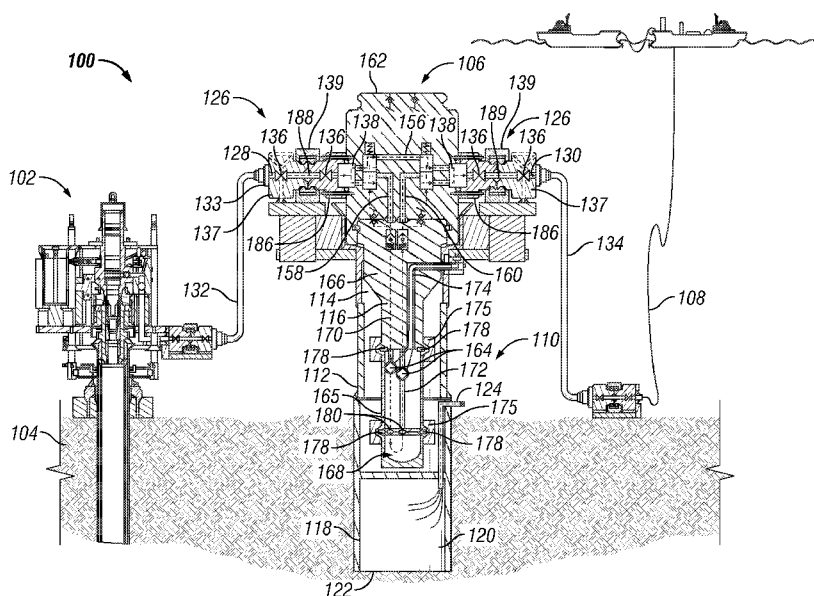


FIG. 1

(57) Abstract: A subsea boosting cap system is disclosed. The system comprises an anchor assembly capable of attaching to the sea floor. The anchor assembly comprises a pump cavity capable of receiving a removable pump assembly. A valve system is attached to the anchor assembly. The valve system comprises an inlet flow path and an outlet flow path. A boosting cap covers the pump cavity. The boosting cap comprises a first flow path configured to provide fluid communication between the inlet flow path and the removable pump assembly. A second flow path provides fluid communication between the removable pump assembly and the outlet. A crossover flow path provides fluid communication between the inlet flow path and the outlet flow path, the crossover flow path bypassing the pump cavity.