

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:

G06K 11/08

A1

(11) International Publication Number:

✓ WO 98/40844

(43) International Publication Date: 17 September 1998 (17.09.98)

(21) International Application Number: ✓ PCT/US98/04903

(22) International Filing Date: ✓ 12 March 1998 (12.03.98)

(30) Priority Data: ✓
08/818,774 ✓ 14 March 1997 (14.03.97) ✓ US(71) Applicant (for all designated States except US): POA SANA,
✓ LLC [US/US]; Suite 308, 369 Broadway, San Francisco, CA
94133 (US). *Add changed. see PF23 of 30/12/99*

(72) Inventors; and


(75) Inventors/Applicants (for US only): GRAHAM, David, S.
[US/US]; 1483 Sutter Street #1701, San Francisco, CA
✓ 94109 (US). FRANCIS, Daniel, A. [US/US]; 975 Carolina
Street #4, San Francisco, CA 94107 (US). ✓(74) Agent: THOMAS, C., Douglass; Beyer & Weaver, LLP, P.O.
Box 61059, Palo Alto, CA 94306 (US).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,
GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MD, MG, ~~MR~~, MN, MW,
MX, NO, NZ, PL, PT, RO, RU, SD, SE, ~~SG~~, SI, SK, SL,
TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW. ARIPO
patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT,
LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI,
CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.

(54) Title: USER INPUT DEVICE FOR A COMPUTER SYSTEM ✓

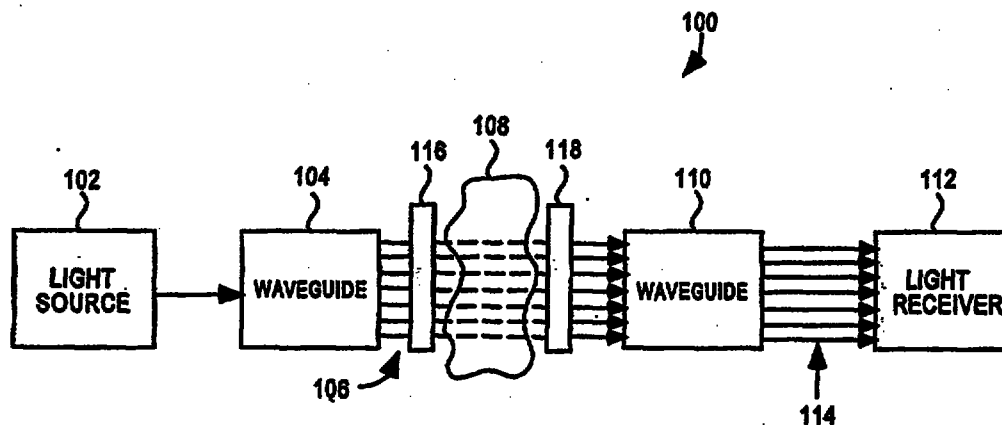

(57) Abstract

A user input device for an electronic device is disclosed. The user input device provides positional information using a grid of light. The grid of light is produced from a light source and waveguides. The grid of light is also received and processed using waveguides and a light detector. Optionally, optics may be used to enhance the operation of the user input device. The user input device is particularly suited for use as a user input device for a computer system or the like.