

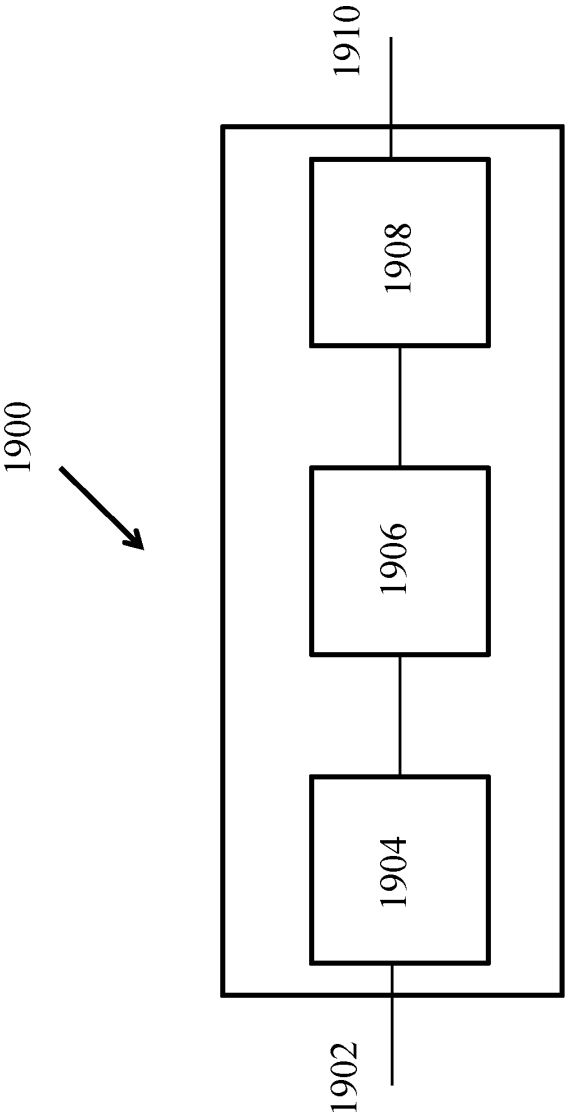


FIG. 1

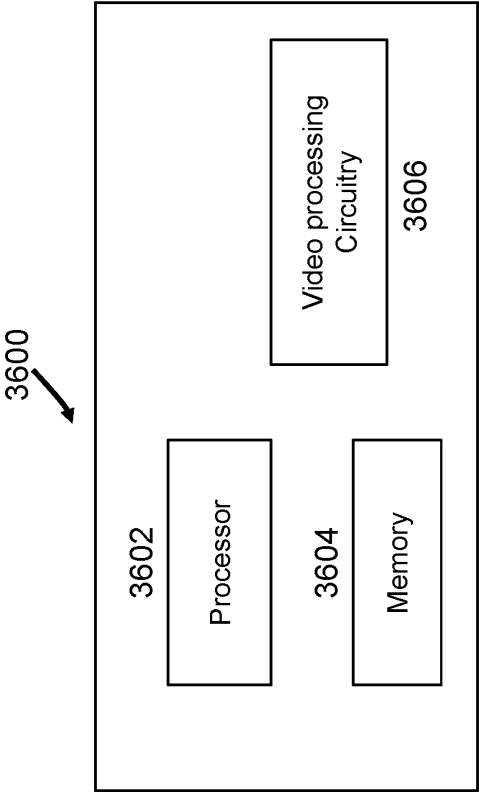


FIG. 2

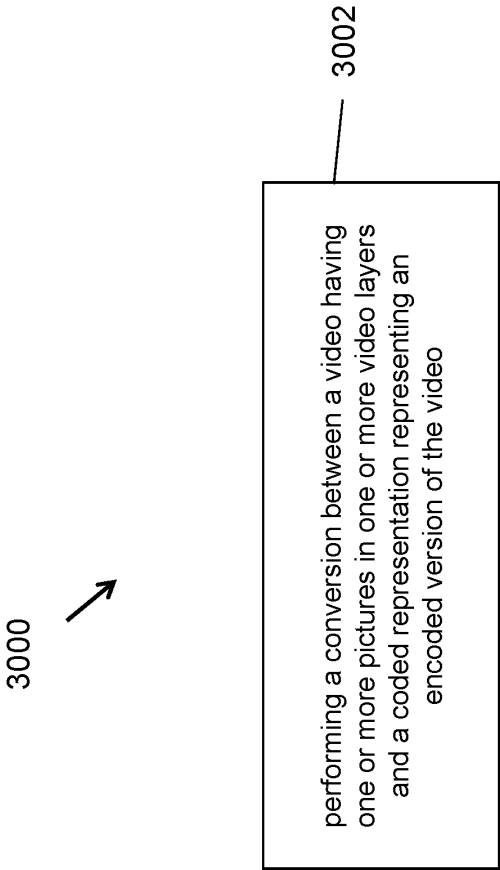


FIG. 3

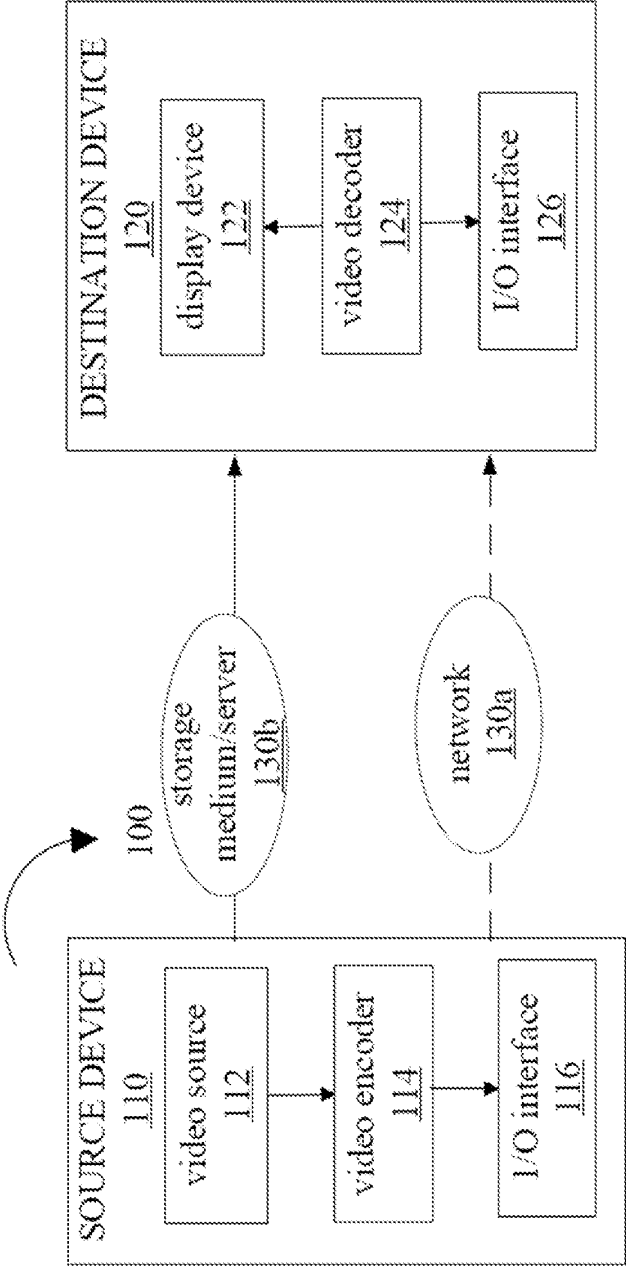


FIG. 4

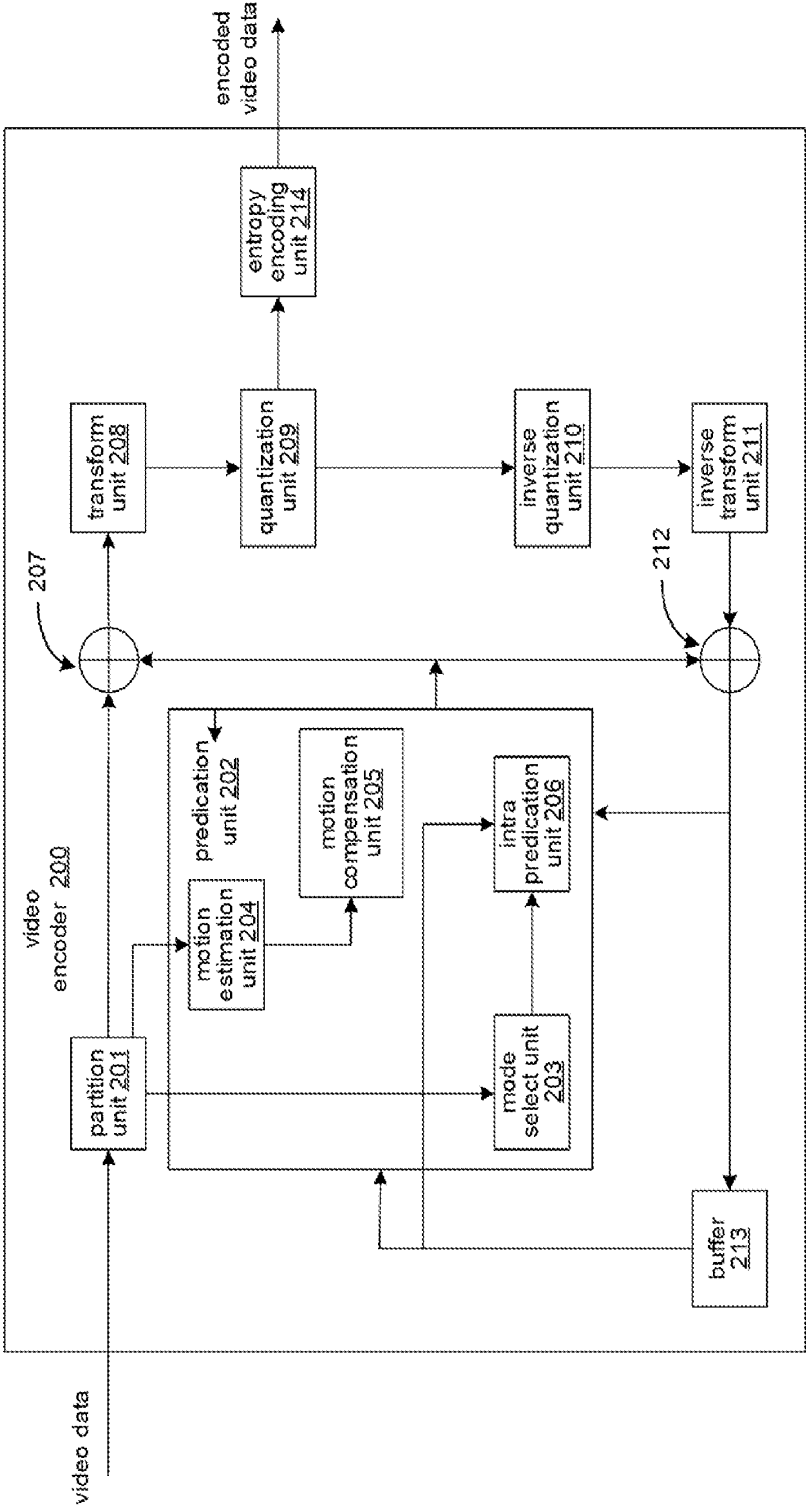


FIG. 5



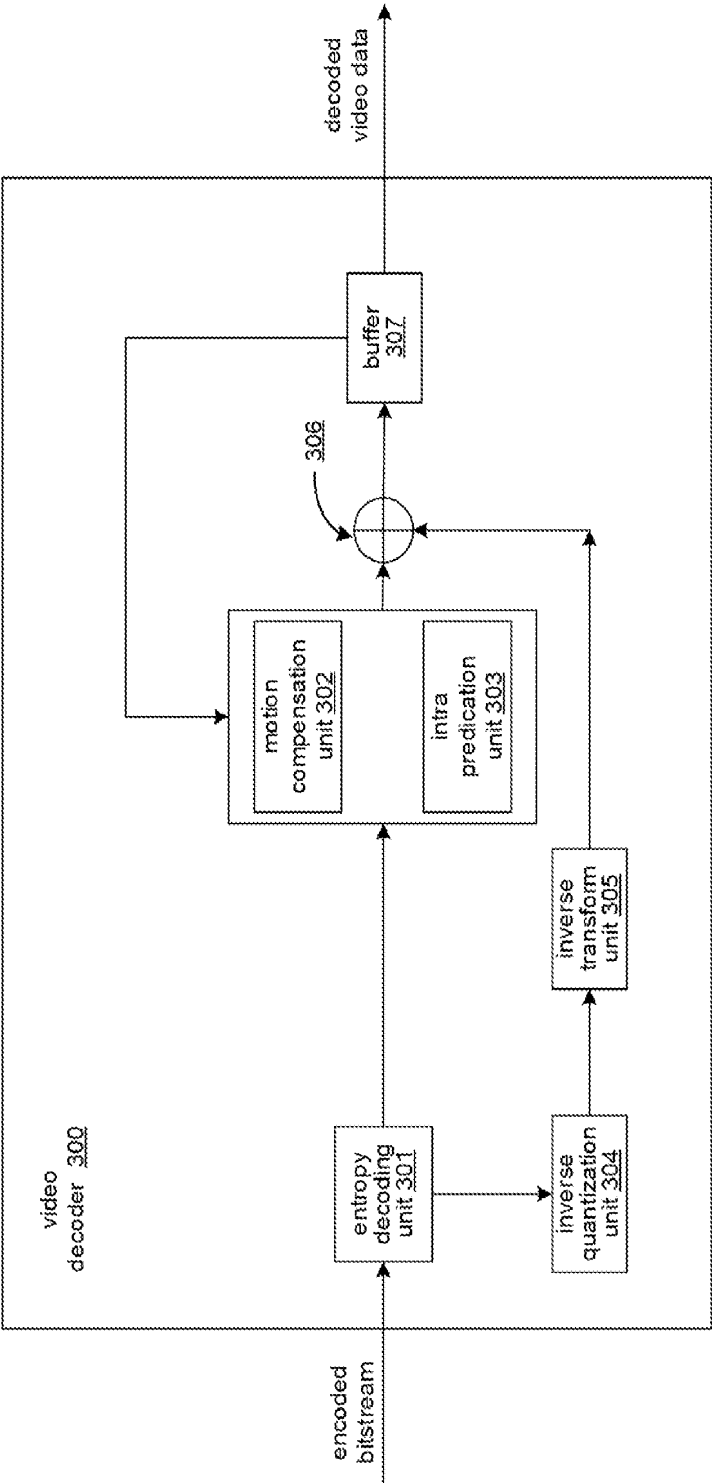


FIG. 6

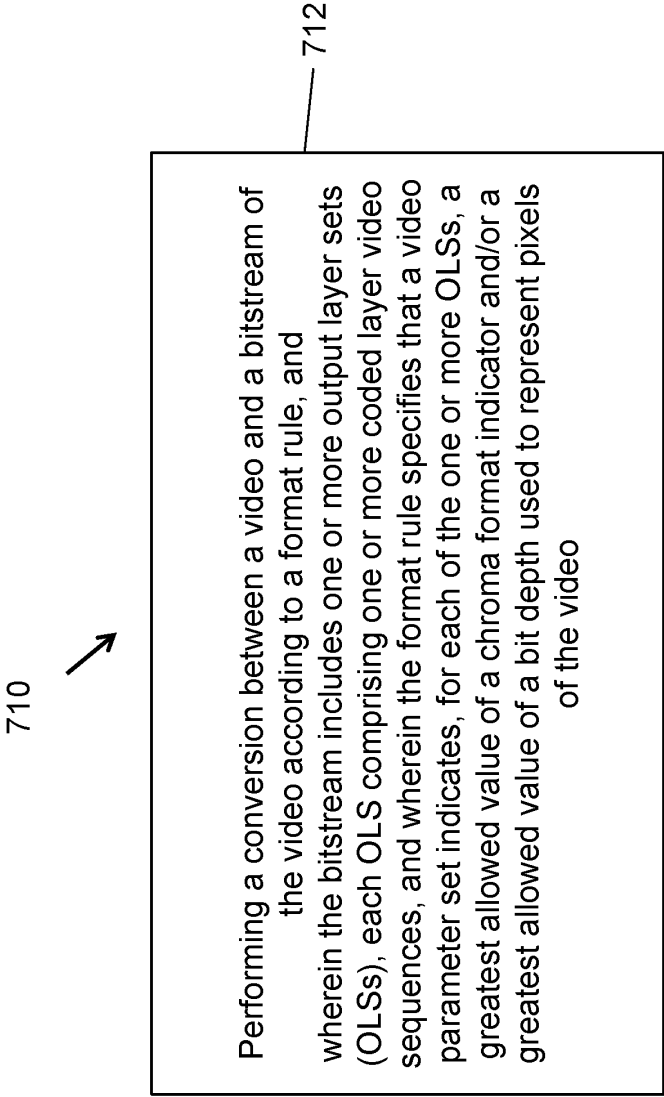

**FIG. 7A**

720

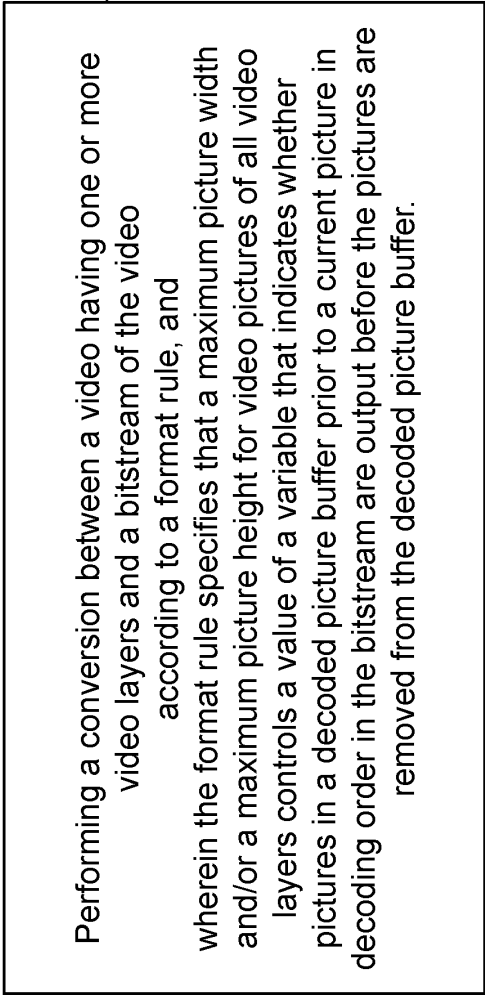

722

**FIG. 7B**


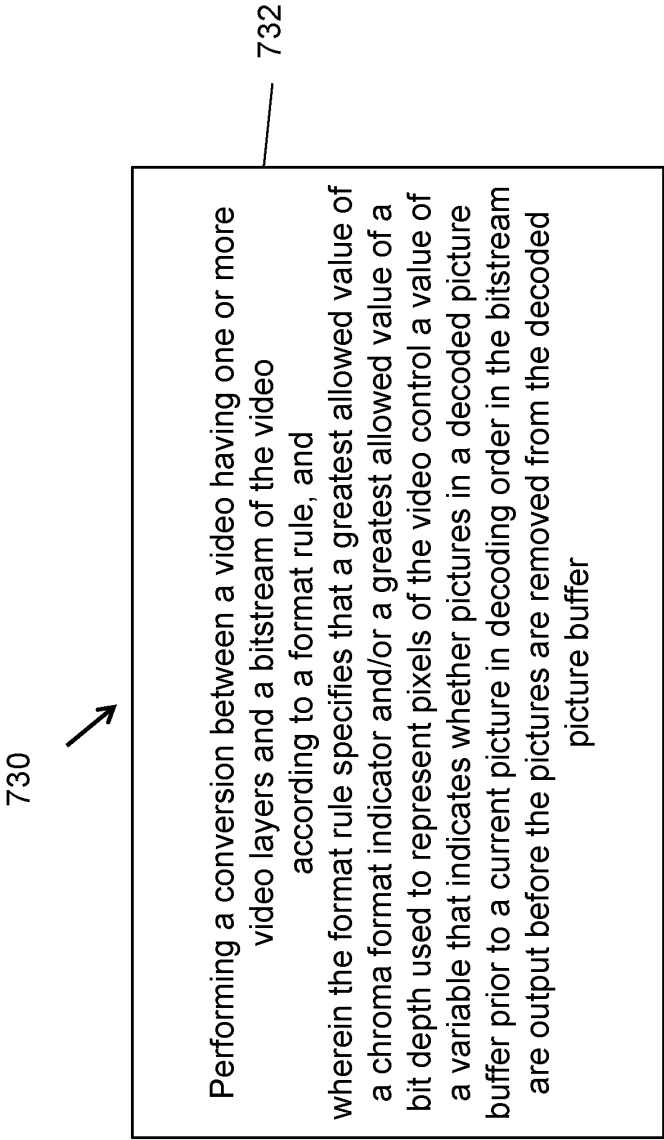


FIG. 7C



**FIG. 7D**


810

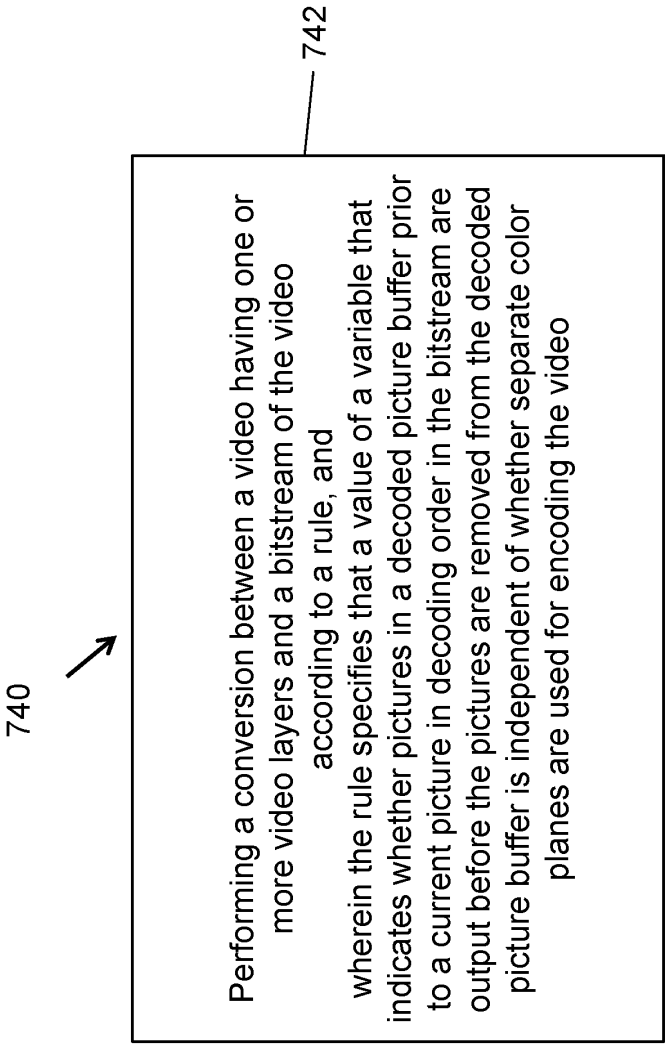

Performing a conversion between a video having one or more video layers and a bitstream of the video according to a format rule, and wherein the format rule specifies that a value of a flag that indicates whether to remove pictures previously decoded and stored in a decoded picture buffer from the decoded picture buffer when decoding an access unit of a certain type is included in the bitstream


812

**FIG. 8A**

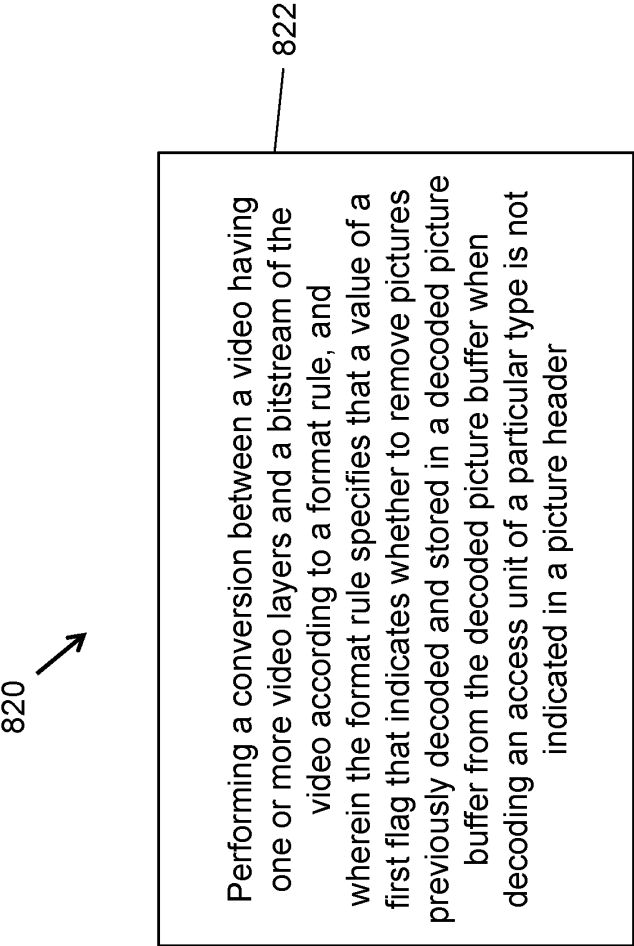


**FIG. 8B**

830

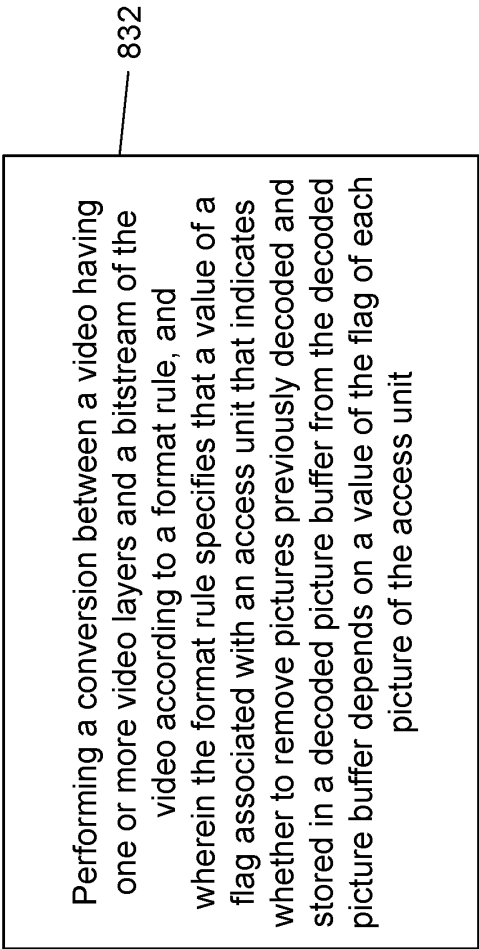


832

**FIG. 8C**

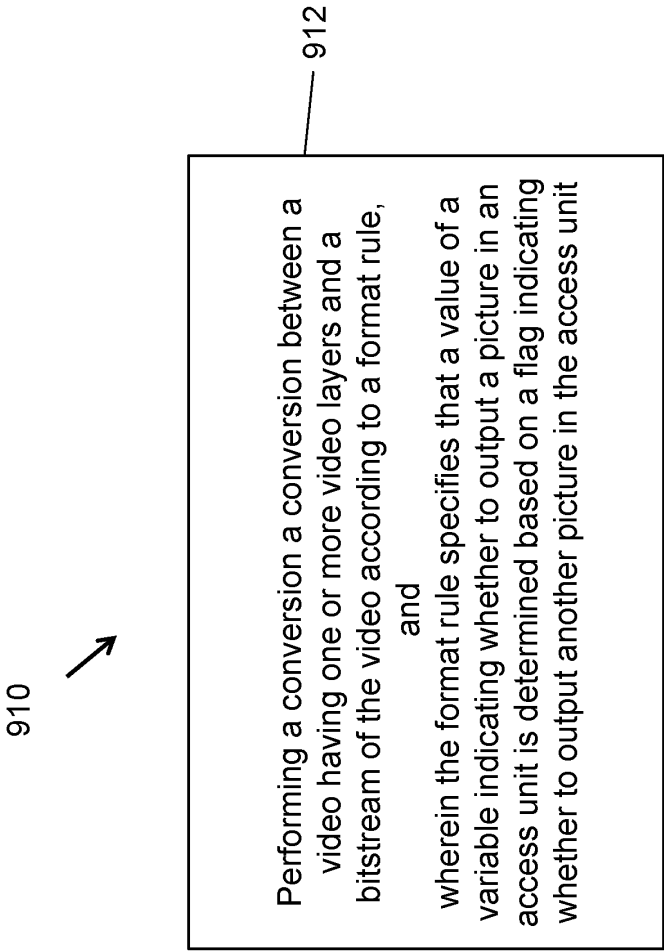

**FIG. 9A**

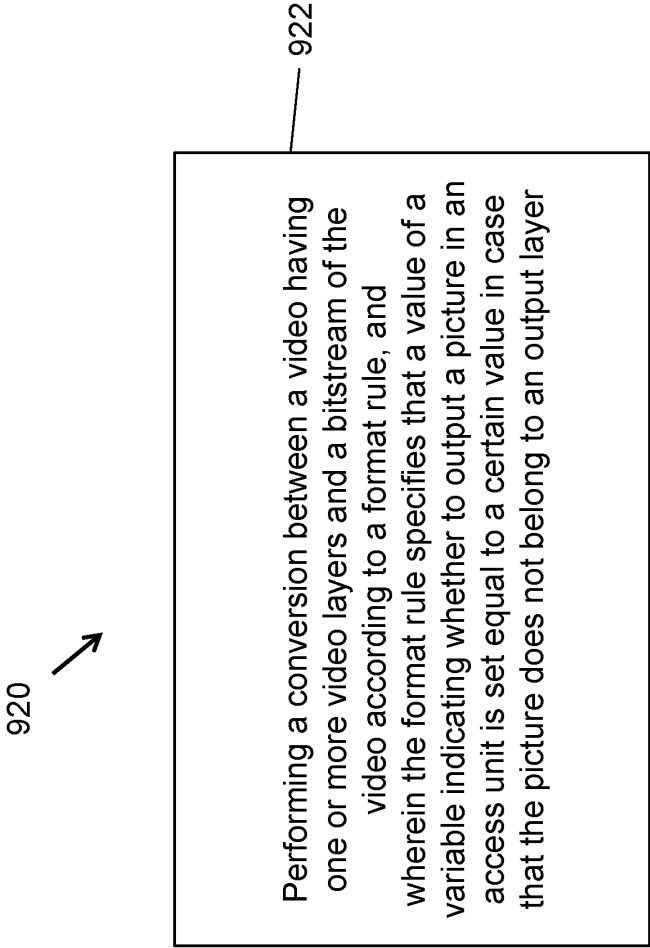

**FIG. 9B**

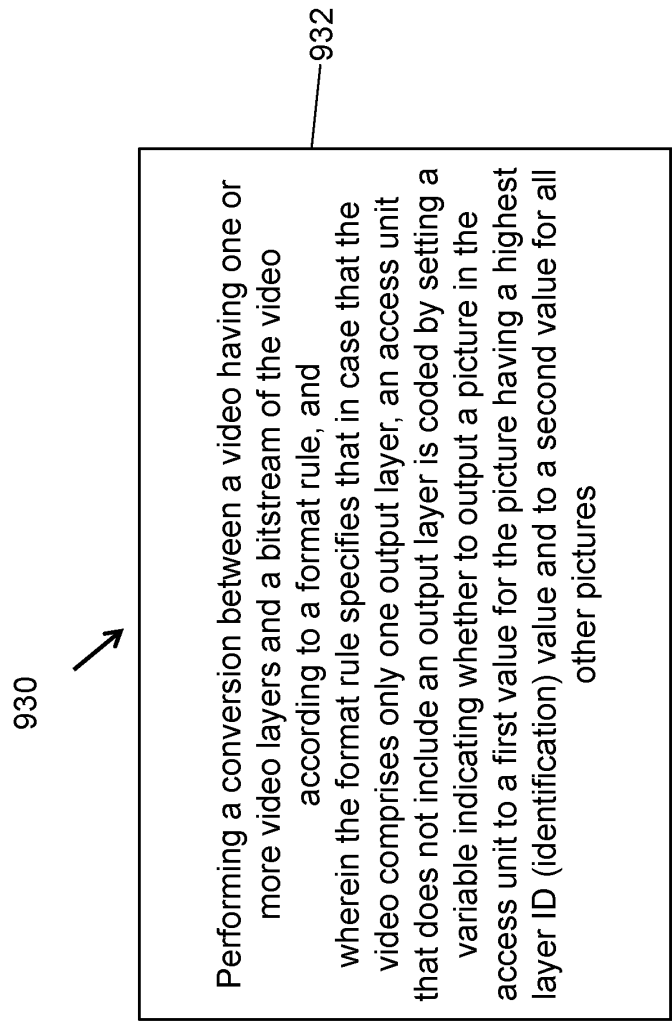


FIG. 9C