



- (51) International Patent Classification:
H04R 25/00 (2006.01)
- (21) International Application Number:
PCT/EP2013/076242
- (22) International Filing Date:
11 December 2013 (11.12.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PCT/EP2013/055765 20 March 2013 (20.03.2013) EP
- (71) Applicants: **WIDEX A/S** [DK/DK]; Nymoellevej 6, DK-3540 Lyngby (DK). **MARCHER, Ib** [DK/DK]; Nymoellevej 6, DK-3540 Lyngby (DK).
- (72) Inventors; and
- (71) Applicants : **JENSEN, Peter Nordland** [DK/DK]; Nymoellevej 6, DK-3540 Lyngby (DK). **VAARBROE, Klaus Henrik** [DK/DK]; Nymoellevej 6, DK-3540 Lyngby (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BEHIND THE EAR HEARING AID

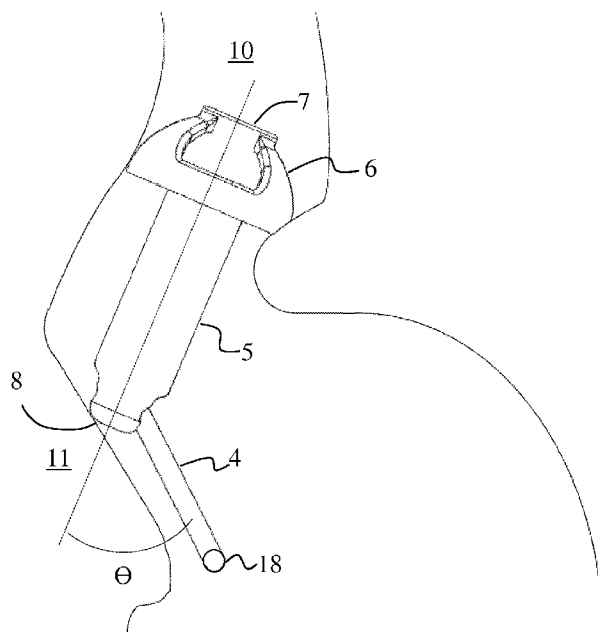


Figure 2

(57) Abstract: A hearing aid (1) comprising a behind-the-ear part (2), an in-the-ear part (3) and a connecting part (4) connecting the behind-the-ear part and the in-the-ear part. The in-the-ear part comprises a first end (7) adapted to be aligned in the ear canal in a direction towards the ear drum when in use, and a second end (8) adapted to abutting a part of the ear outside the ear canal when in use. At least one side wall (15, 16) is arranged between said first end (7) and said second end (8). The direction from a centre of the first end to a centre of the second end defines an axis. The connecting part (4) is attached to the side wall and is extending from this side wall in an angle to the axis between 20 – 70 degrees. The invention also provides a receiver unit for a hearing aid and a method for fitting a hearing aid.

WO 2014/146741 A1



Published:

— *with international search report (Art. 21(3))*