



(51) International Patent Classification:

H01R 12/16 (2006.01) H01R 13/15 (2006.01)
H01R 12/18 (2006.01) H01R 33/76 (2006.01)
H01R 12/34 (2006.01)

(21) International Application Number:

PCT/US2009/052865

(22) International Filing Date:

5 August 2009 (05.08.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2008-227585 4 September 2008 (04.09.2008) JP

(71) Applicant (for all designated States except US): **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3m Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TSUBAKI, Yuichi** [JP/JP]; 33-1, Tamagawadai 2-chome, Setagaya-ku, Tokyo, 158-8583 (JP). **KOBAYASHI, Masahiko** [JP/JP]; 33-1, Tamagawadai 2-chome, Setagaya-ku, Tokyo, 158-8583 (JP).

(74) Agents: **GOVER, Melanie, G.** et al.; 3M Center, Office Of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: ELECTRONIC DEVICE SOCKET

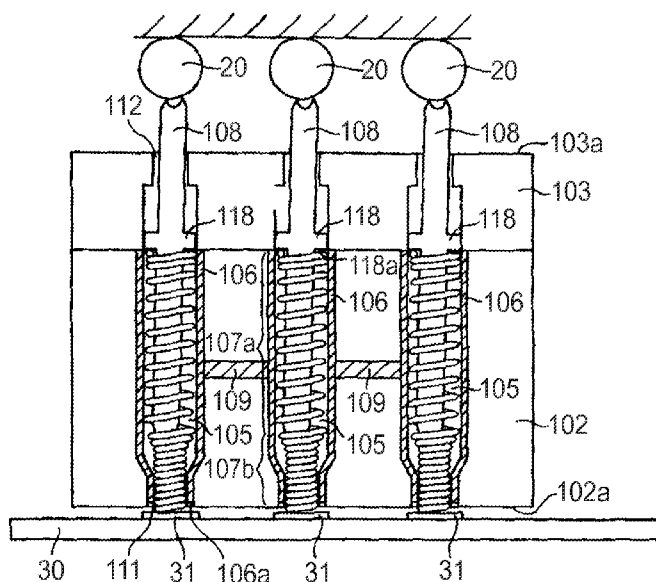


FIG. 3b

(57) Abstract: To provide an electronic device socket able to shorten conductive paths between terminals of an electronic device and contacts of a circuit board. An electronic device socket (1) wherein a socket part 10 electrically connecting a plurality of terminals of an electronic device to corresponding contacts of a circuit board has a plurality of through holes 105 arranged corresponding to the positions of the terminals. Each through hole 105 has an elastic member 107 comprised of a coil spring, provided with an upper part having elasticity along a longitudinal direction of the through hole and a lower part able to form a conductive path substantially parallel to an extension direction of the through hole, a plunger 108 having conductivity biased from the elastic member toward the top surface in a second state where the electronic device is attached and the terminals and contacts of the circuit board are electrically connected, and a conductive film 106 formed at an inner surface of the through hole so as to electrically connect with near a part of the elastic member where a upper part of the elastic member and the plunger contact each other, and a lower part of the elastic member when the elastic member is compressed.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:
14 May 2010