



- (51) **International Patent Classification:**
B29C 45/07 (2006.01) *B29C 45/76* (2006.01)
- (21) **International Application Number:**
PCT/CA2010/001714
- (22) **International Filing Date:**
3 November 2010 (03.11.2010)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/285,305 10 December 2009 (10.12.2009) US
- (71) **Applicant (for all designated States except US):** **HUSKY INJECTION MOLDING SYSTEMS LTD.** [CA/CA]; 500 Queen Street South, Bolton, Ontario L7E 5S5 (CA).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **GLAESENER, Pierre** [LU/LU]; 40, rue de Mersch, L-7780 Bissen (LU). **HALTER, Christophe** [FR/BE]; 8, rue des Ecoles, 6781 Selange (BE).
- (74) **Agent:** **HUSKY INTELLECTUAL PROPERTY SERVICES;** c/o Husky Injection Molding Systems Ltd., 500 Queen Street South, Bolton, Ontario L7E 5S5 (CA).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

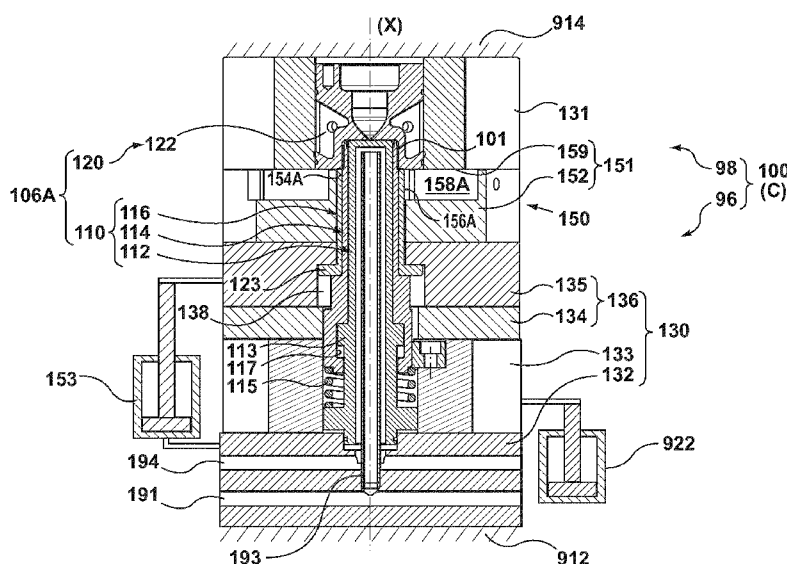
Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** MOLDED ARTICLE TRANSFER DEVICE

**FIG. 2A**

(57) **Abstract:** A molded article transfer device (150, 250) is described herein that is associated, in use, with an injection mold (100, 200). The molded article transfer device (150, 250) includes a transfer structure (151, 251) that defines, amongst other things, a first aperture (154A) that is structured to receive a first molded article (102A) from a first mold stack (106A, 206A) of the injection mold (100). The transfer structure (151, 251) also defines a first branch channel (156A) and a first trunk channel (158A) through which the first molded article (102A) is passable. The first branch channel (156A) connects the first aperture (154A) with the first trunk channel (158A) for passing, in use, the first molded article (102A) thereto, whereafter it passes through the first trunk channel (158A) towards an exit (164A) thereof.