


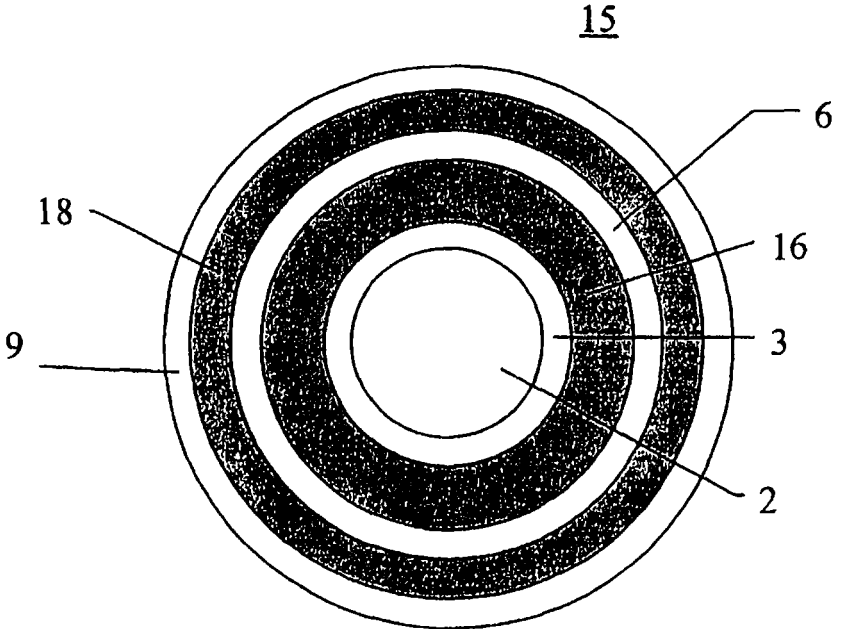

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H01B 12/08, 7/30, 7/02	A1	(11) International Publication Number: WO 00/49626 (43) International Publication Date: 24 August 2000 (24.08.00)
(21) International Application Number: PCT/DK00/00069 (22) International Filing Date: 21 February 2000 (21.02.00) (30) Priority Data: PA 1999 00221 19 February 1999 (19.02.99) DK (71) Applicant (for all designated States except US): NKT RESEARCH CENTER A/S [DK/DK]; Priorparken 878, DK-2605 Brøndby (DK). (72) Inventor; and (75) Inventor/Applicant (for US only): DÄUMLING, Manfred [DE/DK]; Nykæ 54, 7 th, DK-2605 Brøndby (DK). (74) Agent: HOFMAN-BANG A/S; Hans Bekkevolds Allé 7, DK-2900 Hellerup (DK).		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: A CABLE, A METHOD OF CONSTRUCTING A CABLE, AND USE OF A CABLE (57) Abstract The invention relates to a cable and to a method of constructing a cable with at least one cable core having three or more conducting layers which are mutually separated by isolating layers, resistive layers, or reduced electrical contact surfaces. The conducting layers include electrical conductors, which are arranged helically with predetermined pitch angles. According to the invention, the predefined pitch angles increase in steps from layer to layer from the radial innermost conducting layer to an intermediate conducting layer located between the radial innermost conducting layer, and said predefined pitch angles remain substantially constant or decrease in steps from layer to layer from said intermediate conducting layer to the radial outermost conducting layer. As a result, an even current distribution and hereby a reduced AC loss is obtained. The invention further relates to the use of an AC cable according to the invention as a power cable. 15  *G000001* *162162*		