

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 June 2009 (25.06.2009)

PCT

(10) International Publication Number
WO 2009/079124 A1

(51) International Patent Classification:
E21B 33/02 (2006.01) *E21B 33/03* (2006.01)

Branson Lane, Cypress, Texas 77429 (US). **TAYLOR, Thomas Edgar** [US/US]; 1206 Ahrens, Houston, Texas 77017 (US).

(21) International Application Number:
PCT/US2008/083461

(74) Agent: **SWANSON, Tait R.**; 7915 FM 1960 West, Suite 330, Houston, TX 77070 (US).

(22) International Filing Date:
13 November 2008 (13.11.2008)

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/013,914 14 December 2007 (14.12.2007) US

(71) Applicant (*for all designated States except US*): **CAMERON INTERNATIONAL CORPORATION** [US/US]; 4646 W. Sam Houston Parkway North, Houston, Texas 77041 (US).

(72) Inventors; and

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(75) Inventors/Applicants (*for US only*): **HARKINS, Randall Dean** [US/US]; 9614 Rannock Way, Spring, Texas 77379 (US). **GUIDRY, Kirk Paul** [US/US]; 13607

[Continued on next page]

(54) Title: SAFETY DEVICE FOR RETRIEVING COMPONENT WITHIN WELLHEAD

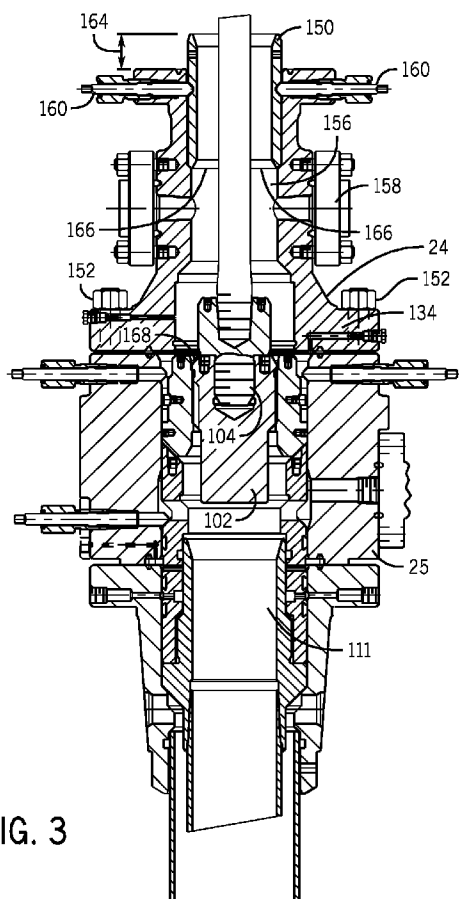


FIG. 3

(57) Abstract: A system is provided that include a safety device (150) configured to mount in a mineral extraction system (10) and block axial movement of a plug (102) in the mineral extraction system while the plug is released from a retainer. A method is provided that includes installing a plug safety catch into a tubular of a mineral extraction system in which the plug safety catch is configured to block axial movement of a plug in response to a pressure differential while the plug is released from a mount position.



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*