

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
30 May 2002 (30.05.2002)

PCT

(10) International Publication Number
WO 02/43091 A1


- (51) International Patent Classification⁷: **H01H 9/16**, 9/26 (74) **Agent: JO, Eui, Je**; Top Patent & Law Firm, Hyecheon Building #831, Room 1405, Yuksam-dong, Gangnam-gu, Seoul 135-080 (KR).
- (21) International Application Number: PCT/KR01/02005
- (22) International Filing Date:
21 November 2001 (21.11.2001)
- (25) Filing Language: Korean
- (26) Publication Language: English
- (30) Priority Data:
2000/32544 U 21 November 2000 (21.11.2000) KR
- (71) Applicant and
(72) **Inventor: PARK, Hyung, Sik** [KR/KR]; 202, Songgwang Mansion, 551, Punghyang-dong, Buk-ku, Gwangju 500-090 (KR).
- (81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SWITCH UNIT



162162

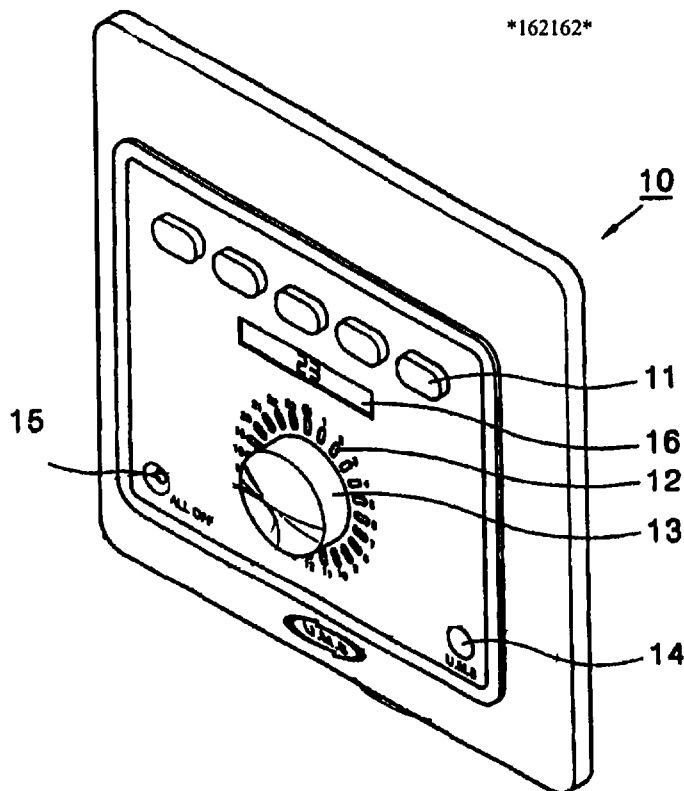

(57) **Abstract:** A switch unit allows a user to perform an on-and-off switching control of a load which is installed in a certain place without having the user move to the load position and confirm the control status of the load. The switch unit includes a local switching unit having a plurality of buttons each corresponding to each load which is installed in a current place, for directly selecting a load to be switching-controlled, an overall switching unit fabricated in the form of a dial, for selecting a load to be switching-controlled, an overall display unit having a number of LEDs, for displaying the switching control state of each load, an all-off switch which is slightly sunk from the surface of the switch unit, for switching all the loads entirely, and a remote controller signal receiver for receiving a remote controller signal. The switch unit further includes a FND display unit for displaying a load corresponding to the current dial position in the overall switching unit with a numerical symbol. Thus, a power source can be easily, conveniently and efficiently used and managed, to thereby provide users with a considerable power saving effect and conveniences.

WO 02/43091 A1

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.