



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H01F 29/12	A2	(11) International Publication Number: WO 99/17315
		(43) International Publication Date: 8 April 1999 (08.04.99)

(21) International Application Number: PCT/SE98/01748

(22) International Filing Date: 29 September 1998 (29.09.98)

(30) Priority Data:
9703562-0 30 September 1997 (30.09.97) SE(71) Applicant (for all designated States except US): ASEA
BROWN BOVERI AB [SE/SE]; S-721 83 Västerås (SE).

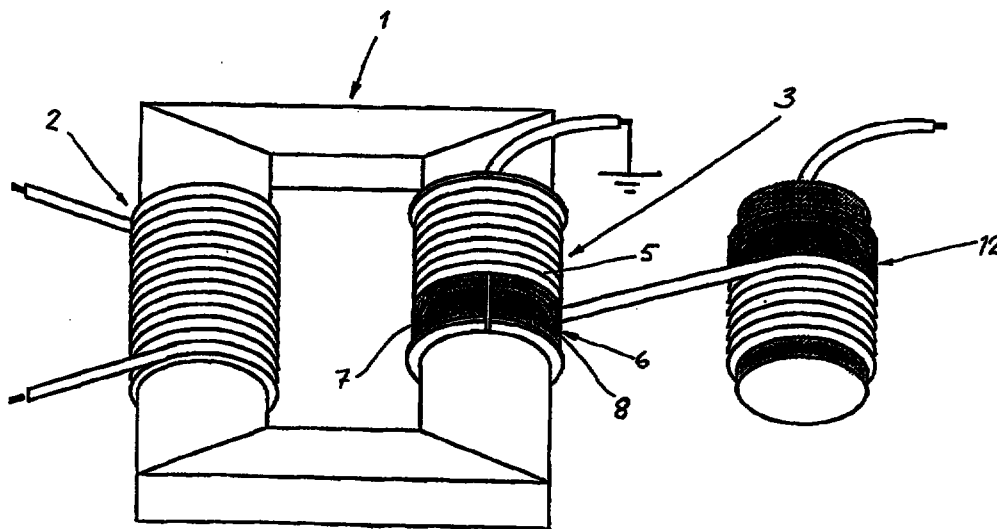
(72) Inventors; and

(75) Inventors/Applicants (for US only): BERGGREN, Sören
[SE/SE]; Vetterstorpögatan 30, S-724 62 Västerås (SE).
FROMM, Udo [DE/SE]; Liegatan 33, S-724 67 Västerås
(SE). LEIJON, Mats [SE/SE]; Hyvrlargatan 5, S-723 35
Västerås (SE). WALFRIDSSON, Lars [SE/SE]; Infanteri-
gatan 52, S-723 50 Västerås (SE). JOHANSSON, Kenneth
[SE/SE]; Bangatan 23 B, S-722 28 Västerås (SE).(74) Agent: JOHANSSON WEBJÖRN, Ingmari; L.A. Groth & Co.
KB, P.O. Box 6107, S-102 32 Stockholm (SE).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE
(Utility model), DK, DK (Utility model), EE, ES, FI, FI
(Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP,
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD,
MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD,
SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT,
UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM,
KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ,
BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GW, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished
upon receipt of that report.

This Sheet Has Been Replaced

(54) Title: A METHOD AND AN ARRANGEMENT FOR REGULATING A TRANSFORMER/REACTOR, AND A TRANS-
FORMER/REACTOR

(57) Abstract

The invention relates to a method for regulating an induced voltage in transformer, alternatively reactive power of a reactor, wherein a winding (5; 26) is achieved with an insulating electric conductor including at least one current carrying conductor, a first layer having semiconducting properties arranged to surround the conductor, a solid insulation layer arranged to surround said first layer, and a second layer having semiconducting properties arranged to surround the insulating layer, wherein a regulating winding (3, 22) is arranged around a magnetic flux carrier (1), and wherein the length of said regulating winding around the magnetic flux carrier is varied. The invention also relates to an arrangement for the realization of the method and a transformer/reactor including such an arrangement.