

30 APR 2003

2002026283

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



162162

(43) International Publication Date
16 May 2002 (16.05.2002)

PCT

(10) International Publication Number
WO 02/39000 A1

(51) International Patent Classification⁷: F16L 19/00,
19/06

(21) International Application Number: PCT/FI01/00917

(22) International Filing Date: 23 October 2001 (23.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20002463 9 November 2000 (09.11.2000) FI

(71) Applicant and

(72) Inventor: SUNDHOLM, Göran [FI/FI]; Ilmari Kiannon
kuja 3, FIN-04310 Tuusula (FI).

(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O.
Box 148, FIN-00121 Helsinki (FI).

(81) Designated States (national): AE, AG, AL, AM, AT, AT
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE
(utility model), DK, DK (utility model), DM, DZ, EC, EE,
EE (utility model), ES, FI, FI (utility model), GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA,
UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,
TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii)) for the following designations AE,
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,

[Continued on next page]

(54) Title: PIPE JOINT REDUCING REQUIRED TIGHTENING FORCE, INCLUDING A TIGHTENING NUT WITH TWO
THREADED SECTIONS WHOSE PITCHES DIFFER.

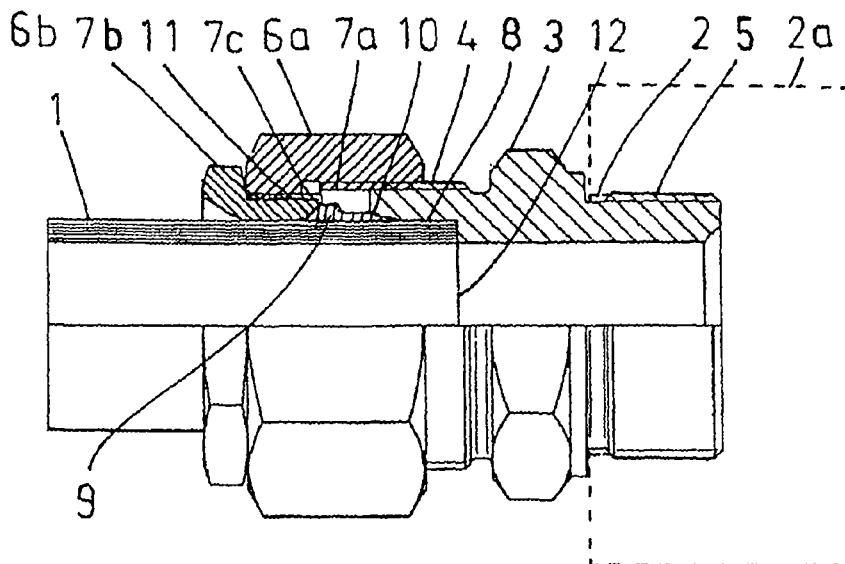

(57) Abstract: The invention relates to a pipe joint for joining a tubular component (1) to a receiving piece (2), the pipe joint comprising a fitting body (3) having a recess (8), a tightening nut (6a) having a first thread (7a), the fitting body having a corresponding thread (4), and a cutting ring (9) being arranged to be pressed between a wedge-like wall portion (10) of the recess, and the tubular component when the tightening nut is tightened. In order that the pipe joint could be tightened to form a leak-proof and strong joint using low torque, which enables the use of small tools applicable in confined spaces, the pipe joint comprises a supplementary nut (6b) having a thread (7c) whose handedness corresponds to that of the first thread (7a) but is smaller, the tightening nut comprising a second thread (7b) corresponding to that of the supplementary nut.

WO 02/39000 A1



ACTION