



(51) International Patent Classification:
H04W 12/04 (2009.01) *H04W 36/14* (2009.01)

(21) International Application Number:
PCT/IB2010/053440

(22) International Filing Date:
28 July 2010 (28.07.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/246,723 29 September 2009 (29.09.2009) US

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FI-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FRANKLIN, Steven** [GB/GB]; 33 Monro Drive, Guildford Surrey GU2 9PS (GB). **GEARY, Stuart** [GB/GB]; Mulberry House 26 Harrow Road, Fleet Hampshire GU51 1JD (GB). **KUBOTA, Keiichi** [JP/GB]; 71A Thames Street, Weybridge Surrey KT13 8LP (GB).

(74) Common Representative: **NOKIA CORPORATION**; c/o Nokia Inc., ATTN: IP Docketing, 6021 Connection Drive, MS 2-5-520, Irving, Texas 75139 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR SOURCE IDENTIFICATION FOR KEY HANDLING FOLLOWING A HANDOVER FAILURE

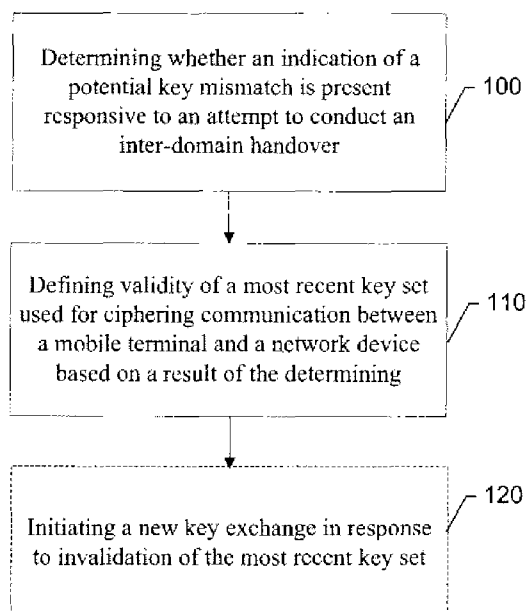


FIG. 4.

(57) Abstract: A method of enabling key handling for a handover between different domains may include determining whether an indication of a potential key mismatch is present responsive to an attempt to conduct a handover between a first domain and a second domain, and defining validity of a most recent key set used for ciphering communication between a mobile terminal and a network device based on a result of the determining.



— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*