

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
14 November 2024 (14.11.2024)



(10) International Publication Number
WO 2024/233797 A1

(51) International Patent Classification:
A63B 22/00 (2006.01) *A63B 21/00* (2006.01)
A63B 22/20 (2006.01)

(21) International Application Number:
PCT/US2024/028610

(22) International Filing Date:
09 May 2024 (09.05.2024)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
63/465,391 10 May 2023 (10.05.2023) US
18/588,743 27 February 2024 (27.02.2024) US

(71) Applicant: **BALANCED BODY, INC.** [US/US]; 5909
88th Street, Sacramento, California 95828-1111 (US).

(72) Inventors: **SINGH, Harbir**; 317 Bramble Court, Roseville, California 95747 (US). **CANALES, Trent**; 8145 East Drive, Roseville, California 95747 (US).

(74) Agent: **WAHL, John R.** et al.; 1144 15th Street, Suite 3300, Denver, Colorado 80202 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(54) Title: ANCHOR BAR AND CARRIAGE STOP ASSEMBLY

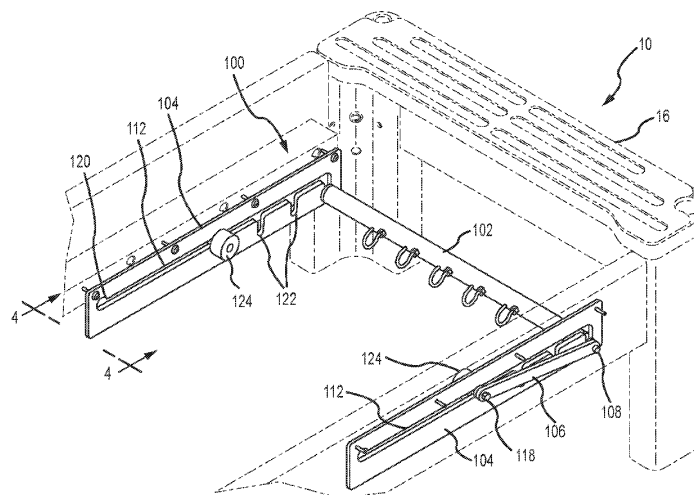


FIG.2

(57) Abstract: A reformer has parallel tracks extending between a head end and a foot end and an anchor bar and carriage stop assembly fastened to the frame adjacent the foot end of the frame. The assembly includes an anchor bar slidably fastened to a pair of elongated plates each fastened to one of the tracks. Each plate has an elongated closed slot therein extending parallel to and below the one of the tracks. The anchor bar has opposite ends, each end extending through one of the elongated slots and through an elongated spacer member pivotally fastened to the end of the anchor bar. Each elongated spacer member has a distal end carrying a pin fastened thereto extending through the elongated slot, wherein the pin has a carriage stop fastened to the pin.

[Continued on next page]

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))