



(51) International Patent Classification:

H02G 3/22 (2006.01) *H02G 15/013* (2006.01)
H01R 13/523 (2006.01) *H02G 15/14* (2006.01)

(21) International Application Number:

PCT/US2014/019981

(22) International Filing Date:

3 March 2014 (03.03.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **FMC TECHNOLOGIES, INC.** [US/US];
1803 Gears Road, Houston, TX 77067 (US).

(72) Inventor: **STRIKOVSKI, Andrei, M.**; 18718 Yorkshire
Manor Court, Spring, TX 77379 (US).

(74) Agent: **QUERY, Henry, C.**; 2100 Manchester Road, Suite
506, Wheaton, IL 60187 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,


BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ELECTRICAL PENETRATOR ASSEMBLY

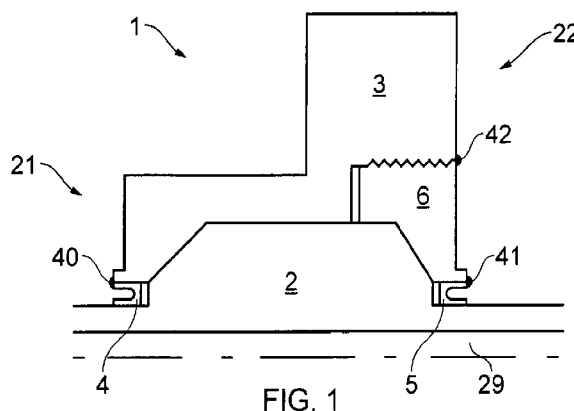

(57) Abstract: A method of manufacturing an electrical penetrator assembly (1) comprising a penetrator housing (3) having a through-bore and an internal support surface; a ceramic sleeve assembly (2) sealingly providing a feed-through for an electrical conductor (29), which sleeve assembly comprises first and second outer support surfaces; and a compression member (6) comprising a compression surface; said method comprising the steps of sealingly attaching at least one metal, annular sealing member (4, 5) to a section of the sleeve assembly; positioning the sleeve assembly in the through-bore of the penetrator housing such that the first, outer support surface is brought into contact with the internal support surface; attaching the compression member to the penetrator housing such that the compression surface is brought into contact with the second, outer support surface; by means of the compression member, directly or indirectly preloading the sleeve assembly by applying a force onto the sleeve assembly such that a predetermined contact pressure is obtained between the first, outer support surface and the internal support surface; and directly or indirectly, sealingly connecting the at least one sealing member to the penetrator housing. The invention also relates to an electrical penetrator assembly manufactured according to the method.