

(51) International Patent Classification:
C08F 210/06 (2006.01) *C10M 143/04* (2006.01)(21) International Application Number:
PCT/US2010/031190(22) International Filing Date:
15 April 2010 (15.04.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/173,501 28 April 2009 (28.04.2009) US
61/173,528 28 April 2009 (28.04.2009) US
12/569,009 29 September 2009 (29.09.2009) US(71) Applicant (for all designated States except US):
EXXONMOBIL CHEMICAL PATENTS INC.
[US/US]; 5200 Bayway Drive, Baytown, TX 77520-2101 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **YEH, Richard, C-M** [US/US]; 4910 Braeburn Dr., Bellaire, TX 77401-5316 (US). **KOLB, Rainer** [DE/US]; 3411 Park Spring Lane, Kingwood, TX 77345 (US).(74) Agents: **TIMMINS, Stephen** et al.; Exxonmobil Chemical Company, Law Technology, P.O. Box 2149, Baytown, TX 77522-2149 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: IMPROVED FINISHING PROCESS FOR AMORPHOUS POLYMERS

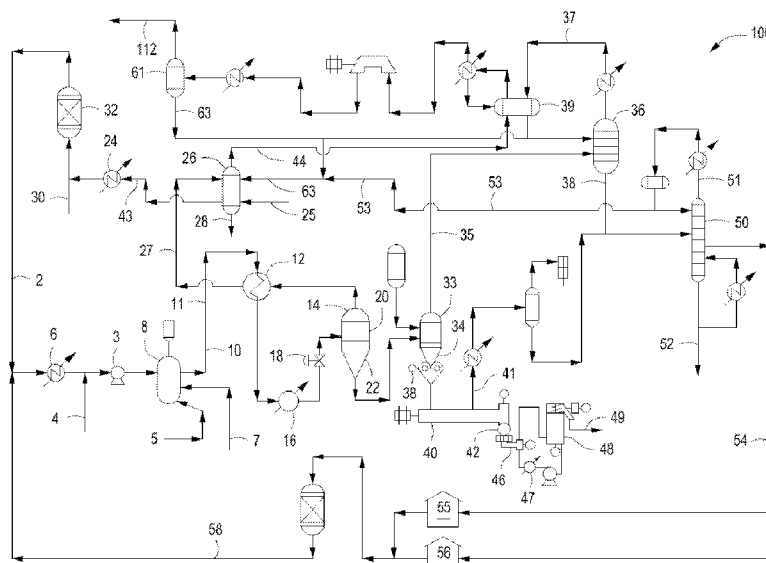


FIG. 1

(57) Abstract: Extruded, copolymer pellet compositions and methods for making the same. A copolymer pellet composition can have an ethylene content of about 40 wt.% to about 50 wt.% and a propylene content of about 50 wt.% to about 60 wt%, based on total weight of the copolymer, wherein the copolymer has a MFR (230°C/2.16 kg) of from about 3.0 g/10 min to about 25 g/10 min; a MWD (Mw/Mn) of about 2.3 or less; and no measurable melting peak, as measured by DSC.



-
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))* — *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
- Published:**
- *with international search report (Art. 21(3))*