

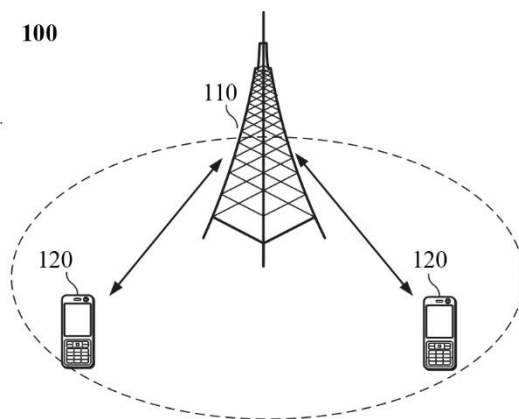


FIG. 1

K uplink transmission channels are transmitted in continuous time domain resources of at least one continuous slot; wherein the K uplink transmission channels are used for independently transmitting target data; K is an integer greater than or equal to 2

201

FIG. 2

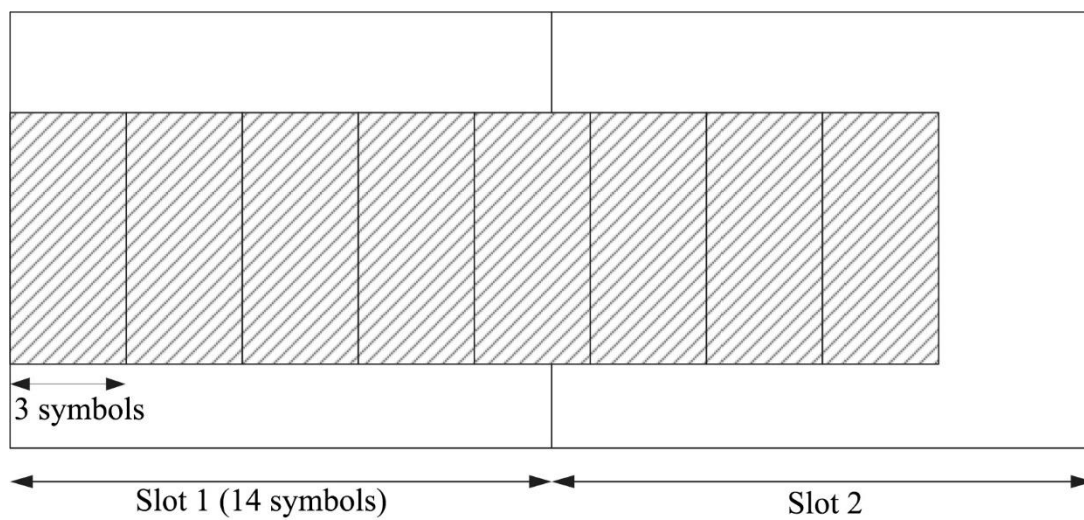


FIG. 3

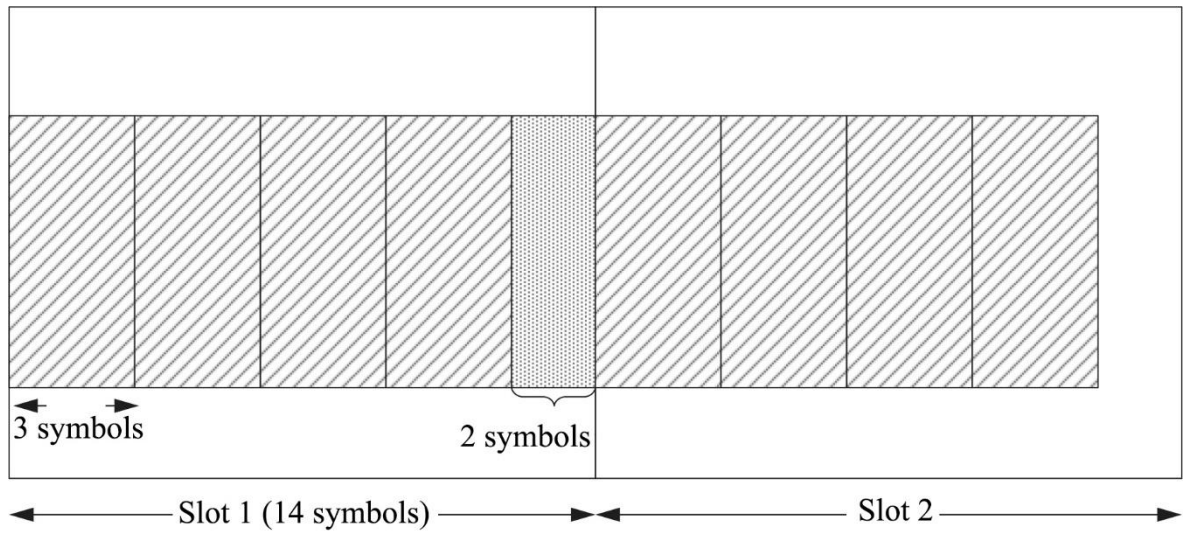


FIG. 4

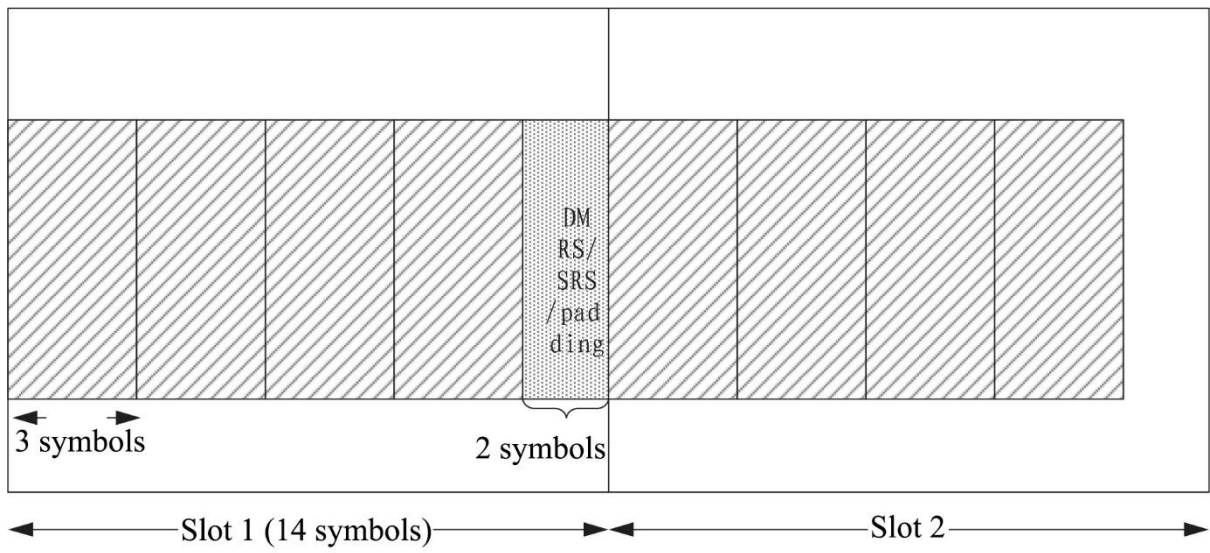


FIG. 5

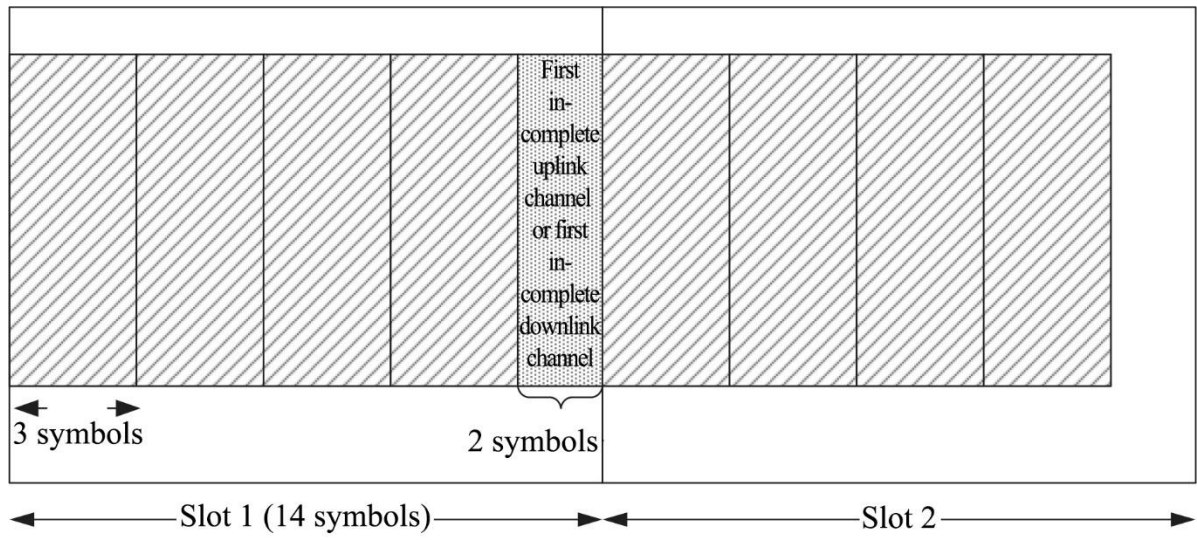


FIG. 6

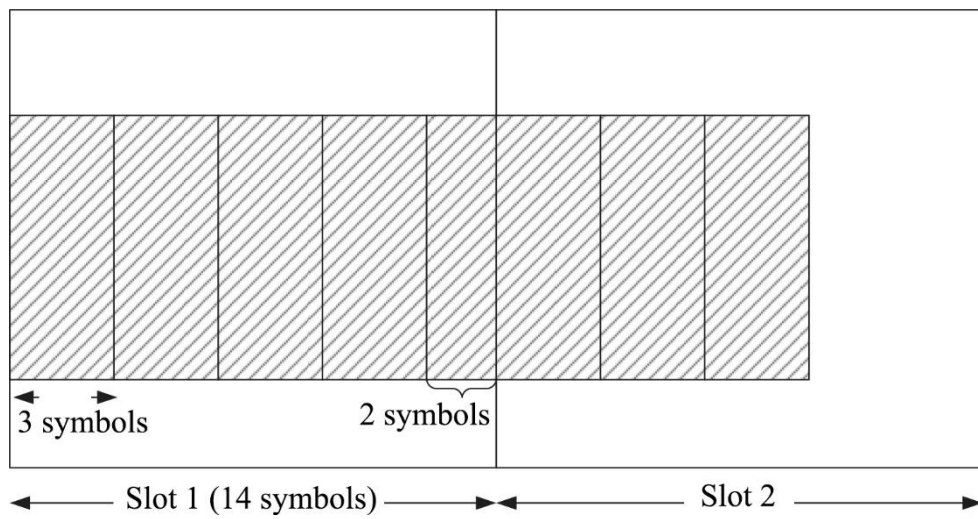


FIG. 7

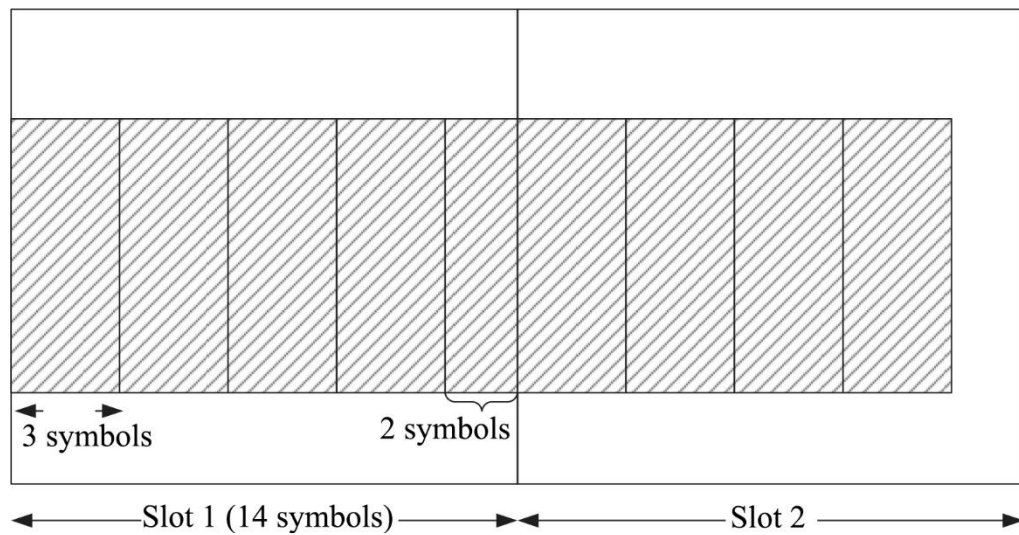


FIG. 8

K downlink transmission channels are transmitted in continuous time domain resources of at least one continuous slot; wherein the K downlink transmission channels are used for independently transmitting target data; K is an integer greater than or equal to 2

901

FIG. 9

First communication unit 1001

FIG. 10

Second communication unit 1101

FIG. 11

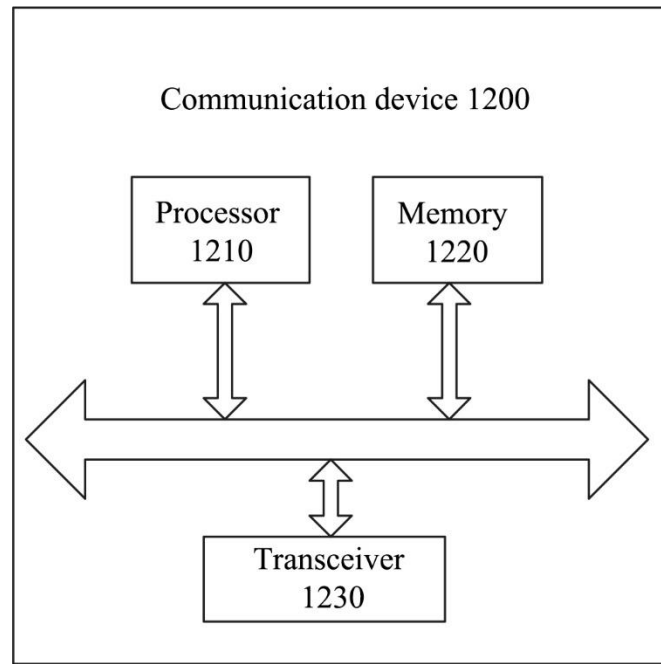


FIG. 12

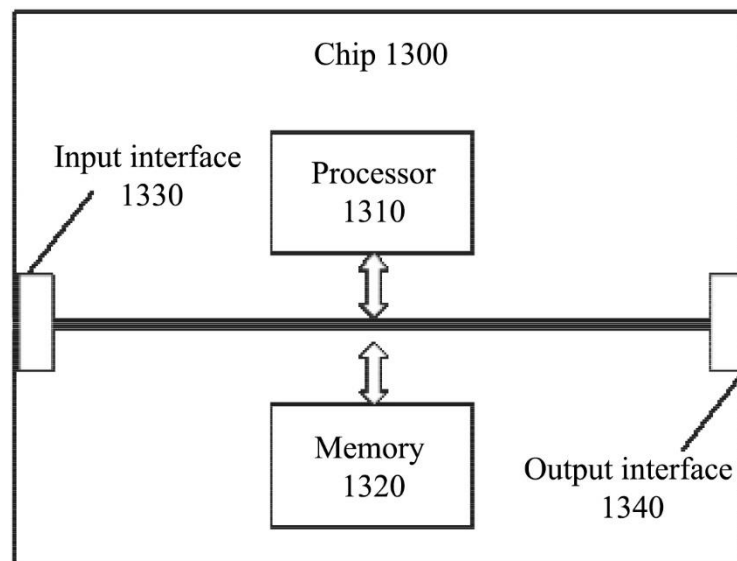


FIG. 13

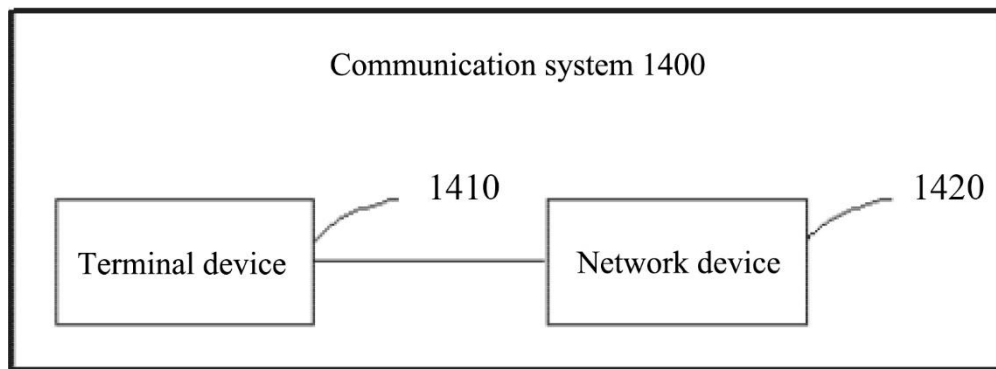


FIG. 14