

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 August 2005 (04.08.2005)

PCT

(10) International Publication Number
WO 2005/070754 A1

(51) International Patent Classification⁷: **B63B 21/06**

(21) International Application Number:
PCT/NO2005/000030

(22) International Filing Date: 26 January 2005 (26.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20040355 26 January 2004 (26.01.2004) NO

(71) Applicant (for all designated States except US):
ROLLS-ROYCE MARINE AS [NO/NO]; Årsund-
veien 24, N-6270 Brattvåg (NO).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TANDE, Arne**

[NO/NO]; N-6270 Brattvåg (NO). ØYEN, Ludvig, Kåre
[NO/NO]; N-6050 Valderøy (NO). ANTONSEN, Ottar
[NO/NO]; N-6280 Søvik (NO).


(74) Agent: **AS BERGEN PATENTKONTOR**; Strandgt.
198, P.O. Box 1998, Nordnes, N-5817 Bergen (NO).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: DEVICE OF A TOWING PIN FOR GUIDING A CABLE ON BOARD A VESSEL

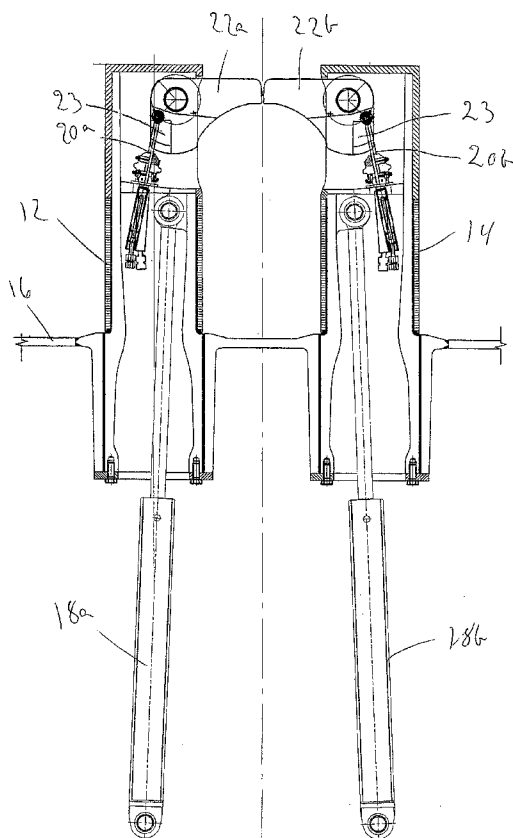

(57) Abstract: Device for a tow pin to lead a cable, such as a chain, wire, hawser, etc, onboard a vessel, comprising a number of cylinders that can be hoisted and lowered, where each of the cylinders comprises a rotary stopping element, facing each other, to prevent that the cable runs out of the tow pin. Said stopping element can be turned outwards with the help of a piston arrangement arranged in the cylinder, and that the stopping element can be turned outwards in the whole of the working area of the tow pin.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*