

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 May 2005 (26.05.2005)

PCT

(10) International Publication Number
WO 2005/047758 A1

(51) International Patent Classification⁷: **F16L 55/165**

(21) International Application Number:
PCT/US2004/036629

(22) International Filing Date:
3 November 2004 (03.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/704,461 7 November 2003 (07.11.2003) US

(71) Applicant (for CA only): **INSITUFORM (NETHERLANDS) B.V.** [NL/NL]; West Blaak 6, Third Floor, 3012 NJ Rotterdam (NL).

(71) Applicant (for DE, GB, IE only): **INSITUFORM HOLDINGS (UK) LIMITED** [GB/GB]; Unit 6, Roundwood Industrial Estate, Osset, West Yorkshire WFS 9SQ (GB).

(71) Applicant (for all designated States except CA, DE, GB, IE, US): **INA ACQUISITION CORP.** [US/US]; Suite 1410, Nemours Building, 1007 Orange Street, Wilmington, DE 19801 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DRIVER, Franklin, Thomas** [US/US]; 113 Rathfarnham Drive, St. Charles, MO 63304 (US). **WANG, Weiping** [US/US]; 1027 Oakwood Farms Lane, Ballwin, MO 63021 (US).


(74) Agent: **WOLFSON, Michael, I.**; Reed Smith LLP, 29th Floor, 599 Lexington Avenue, New York, NY 10022-7650 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: RESIN IMPREGNATION TOWER FOR CURED IN PLACE LINER

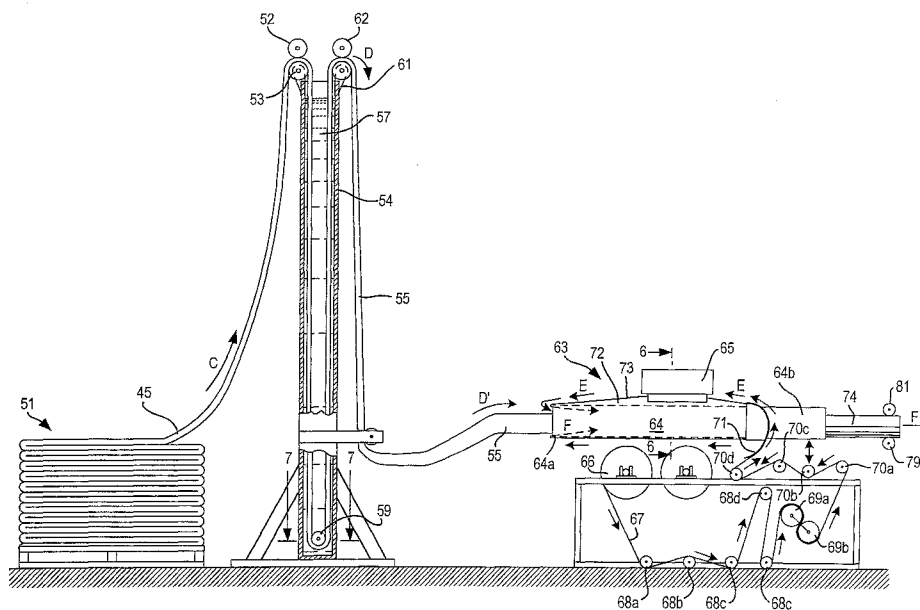

(57) Abstract: A non-pressurized resin impregnation tower (54) for continuously impregnating the resin impregnable layer of a tubular cured in place liner (55) is provided. The tower (54) is at a height to provide sufficient resin pressure head to impregnate the resin impregnable layer fully. The resin impregnated tube (55) is fed into the top of the tower (54), drawn down about a roller at the bottom, removed from the top of the tower (54) and then wrapped with an outer impermeable coating. The impregnated liner (55) is suitable for pull-in-and-inflate method of installation or may be everted. For liners formed with an inner impermeable layer, the Liner is suitable for curing with steam.

WO 2005/047758 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.