



(51) International Patent Classification:

E21B 43/01 (2006.01) *B63B 3/14* (2006.01)
E21B 17/01 (2006.01) *B63B 35/44* (2006.01)
E21B 19/00 (2006.01)

(21) International Application Number:

PCT/EP2014/057737

(22) International Filing Date:

16 April 2014 (16.04.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20130527 16 April 2013 (16.04.2013) NO

(71) Applicant: **GVA CONSULTANTS AB** [SE/SE]; P.O.
Box 11450, S-404 29 Göteborg (SE).

(72) Inventors: **LINDBERG, Kaj**; Hökegårdsgatan 83, S-431
38 Mölndal (SE). **SVENSSON, Kennet**; Arvesgårde 26, S-
417 44 Göteborg (SE).

(74) Agent: **FELLER, Frank**; Weickmann & Weickmann,
Postfach 860 820, 81635 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CONDUIT BALCONY

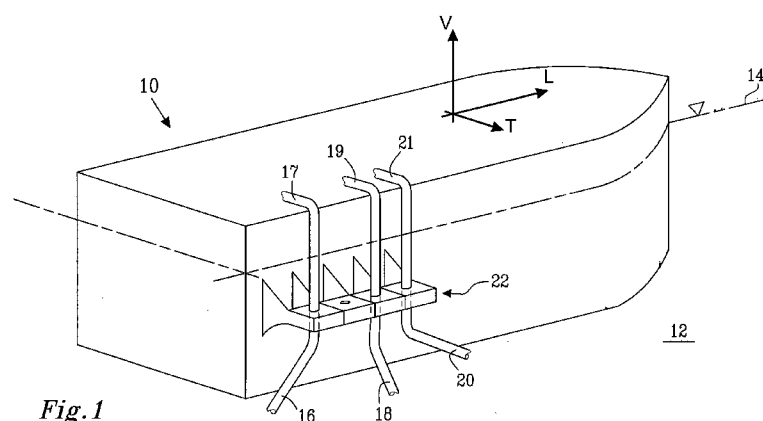


Fig. 1

(57) Abstract: The present disclosure relates to a conduit balcony (22) for a floating unit (10). The conduit balcony (22) comprises a support portion (24) adapted to support at least one conduit. The conduit balcony (22) further comprises a connection portion (26) adapted to connect the support portion (24) to the floating unit (10). The conduit balcony (22) extends in a longitudinal direction (L) and a transversal direction (T). The connection portion (26) extends in the transversal direction (T) from a first connection portion (26'), adapted to be attached to the floating unit (10), to a second connection portion (26''), attached to the support portion (24). The support portion (24) comprises an inner support portion (24') located closest to the first connection portion (26') in the transversal direction (T). The conduit balcony (22) is such that a first prescribed elongation (Δ_1), in the longitudinal direction (L), of the first connection portion (26') results in a second elongation (Δ_2) of the inner support portion (24'). The conduit balcony (22) is configured such that the second elongation (Δ_2) is less than or equal to 30 % of the first elongation (Δ_1).